

### **OIL ANALYSIS REPORT**

Sample Rating Trend



Machine Id

# **FREIGHTLINER 638649**

Diesel Engine Fluid PETRO CANADA DURON SHP 10W30 (--- QTS)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0079241	PCA0099734	PCA0091367
Sample Date		Client Info		25 Mar 2024	25 Aug 2023	17 Mar 2023
Machine Age	mls	Client Info		55513	35892	5
Oil Age	mls	Client Info		33877	14236	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	60	28	59
Chromium	ppm	ASTM D5185m	>5	5	3	5
Nickel	ppm	ASTM D5185m	>2	0	<1	1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	1	0
Aluminum	ppm	ASTM D5185m	>30	45	22	55
Lead	ppm	ASTM D5185m	>30	0	0	0
Copper	ppm	ASTM D5185m	>150	101	250	278
Tin	ppm	ASTM D5185m	>5	2	2	4
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	21	28	30
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	58	53	46
Manganese	ppm	ASTM D5185m	0	2	2	4
Magnesium	ppm	ASTM D5185m	950	809	736	540
Calcium	ppm	ASTM D5185m	1050	1413	1296	1597
Phosphorus	ppm	ASTM D5185m	995	996	943	728
Zinc	ppm	ASTM D5185m	1180	1236	1181	939
Sulfur	ppm	ASTM D5185m	2600	2692	2557	2069
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	6	5	7
Sodium	ppm	ASTM D5185m		4	4	9
Potassium	ppm	ASTM D5185m	>20	114	55	135
Potassium		ASTM D5185m method	>20 limit/base	114 current	55 history1	135 history2
INFRA-RED	ppm	method	limit/base	current	history1	history2
INFRA-RED Soot %	ppm %	method *ASTM D7844	limit/base >3	current 1.2	history1 0.6	history2 0.6
INFRA-RED Soot % Nitration	ppm % Abs/cm Abs/.1mm	method *ASTM D7844 *ASTM D7624	limit/base >3 >20	current 1.2 9.9	history1 0.6 8.4	history2 0.6 9.8
INFRA-RED Soot % Nitration Sulfation FLUID DEGRAD	% Abs/cm Abs/.1mm OATION	method *ASTM D7844 *ASTM D7624 *ASTM D7415 method	limit/base >3 >20 >30 limit/base	current 1.2 9.9 22.8 current	history1 0.6 8.4 20.9 history1	history2 0.6 9.8 23.1 history2
INFRA-RED Soot % Nitration Sulfation	ppm % Abs/cm Abs/.1mm	method *ASTM D7844 *ASTM D7624 *ASTM D7415	limit/base >3 >20 >30	current 1.2 9.9 22.8	history1 0.6 8.4 20.9	history2 0.6 9.8 23.1



## **OIL ANALYSIS REPORT**

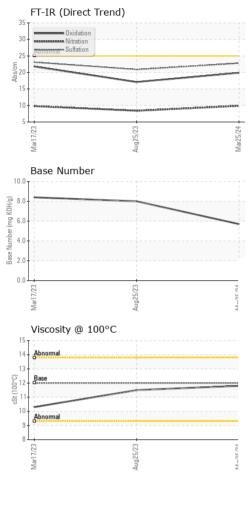

)	VISUAL		method	limit/base	current	history1	history2
	White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Aug25/23 Mar25/24	Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Aug	Odor	scalar	*Visual	NORML	NORML	NORML	NORML
	Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
	Free Water	scalar	*Visual		NEG	NEG	NEG
	FLUID PROPE		method	limit/base		history1	history2
	Visc @ 100°C	cSt	ASTM D445	12.00	11.8	11.5	10.3
	GRAPHS						
	Iron (ppm)				Lead (ppm	)	
<u>-</u> 25/23 -	Severe				60 - Severe		
Aug25/23 **>c ->*	Abnormal	J					
	8: 50						
					20-		
		5		+		3	
	Mar17/23	Aug 25/23		Mar25/24	Mar17/23	Aug25/23	
	—	Au		Z	_		:
	Aluminum (ppm)				Chromium	(ppin)	
	50			-	10 - G		
	40 E 30 Abnormal			udd	8		
Aug25/23 14> 5 -> 4	20	$\overline{}$		d	4 Abnormal		
Aug	10 -				2		
	04	23		24 +-		23 -	
	Mar17/23	Aug25/23		Mar25/24	Mar17/23	Aug25/23	
	≥ Copper (ppm)	Aı		≥	≥ Silicon (ppr		:
	300 T Severe				40		
	250				Severe		
	200 Abnormal			udd			
	E 150 - Abnormal	1	\ \		20 - 0		
	50 -				10		
	Mar17/23	Aug25/23		Mar25/24	Mar17/23	Aug25/23	
	≊ Viscosity @ 100°C			W	≊ Base Numb		
	<sup>16</sup>						
	14 Abnormal			KOH	3.0		
	0 0 12 73 8 8 8 8			E E	6.0 <b>-</b>		
				4 dump	H.O		
	10 Abnormal	1		Base Number (mg KOH/g)	2.0		
	8	23			0.0 L	23	
	Mar17/23	Aug25/23		Mar25/24	Mar17/23	Aug25/23	
Laboratory Sample No. Lab Number Unique Number Test Package o discuss this sample report,	: WearCheck USA - 50 : PCA0079241 : 06147071 : 10977149 : MOB 1 ( Additional Te	1 Madiso Rece Teste Diagu sts: TBN	ived : 12 ed : 15 nosed : 15 l)				

Ē

Contact/Location: Anthony Cursi - MILNEW