


# **OIL ANALYSIS REPORT**

~



NORMAL



Machine Id
642076
Component

Diesel Engine

PETRO CANADA DURON SHP 10W30 (--- QTS

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


## Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

QTS)				Mar2024		
,						
SAMPLE INFORI	MATION	method				history2
Sample Number		Client Info		PCA0110159		
Sample Date		Client Info		12 Mar 2024		
Machine Age	mls	Client Info		14981		
Oil Age	mls	Client Info		14981		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	46		
Chromium	ppm	ASTM D5185m	>20	2		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>20	54		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	125		
Tin	ppm	ASTM D5185m	>15	4		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	45		
Barium	ppm	ASTM D5185m	0	<1		
Molybdenum	ppm	ASTM D5185m	50	43		
Manganese	ppm	ASTM D5185m	0	4		
Magnesium	ppm	ASTM D5185m	950	544		
Calcium	ppm	ASTM D5185m	1050	1686		
Phosphorus	ppm	ASTM D5185m	995	808		
Zinc	ppm	ASTM D5185m	1180	959		
Sulfur	ppm	ASTM D5185m	2600	2784		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	8		
Sodium	ppm	ASTM D5185m		6		
Potassium	ppm	ASTM D5185m	>20	192		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.5		
Nitration	Abs/cm	*ASTM D7624	>20	8.1		
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.2		
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.8		
Base Number (BN)	mg KOH/g	ASTM D2896		9.0		
()	0 - 0					



## **OIL ANALYSIS REPORT**

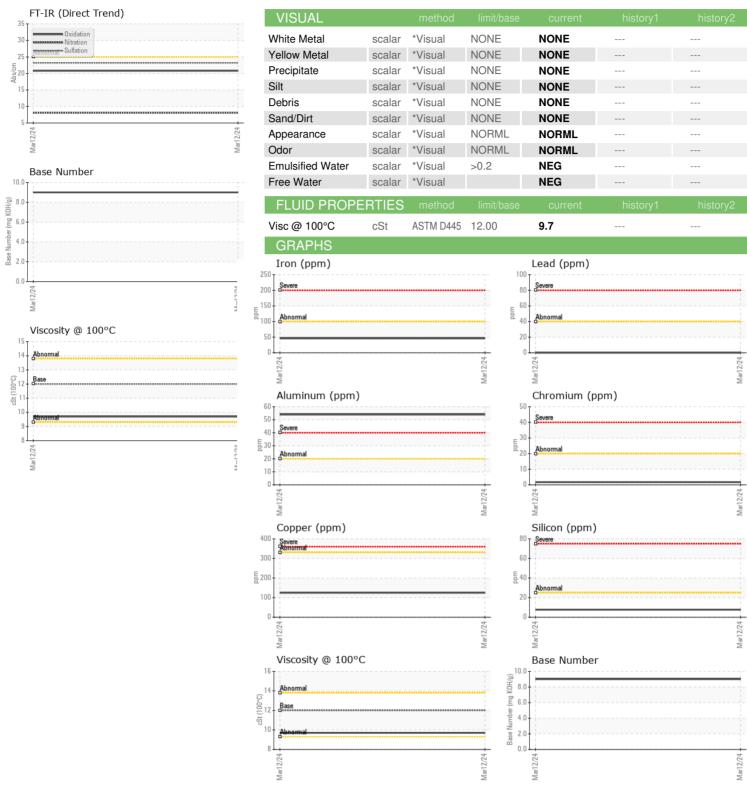





Certificate 12367

Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0110159 Lab Number : 06147076 Unique Number : 10977154

Received **Tested** Diagnosed

: 12 Apr 2024

: 15 Apr 2024

: 15 Apr 2024 - Sean Felton

Test Package : MOB 1 ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**MILLER TRUCK LEASING #121** 

107 HOW LANE NEW BRUNSWICK, NJ US 08901

Contact: Anthony Cursi acursi@millertransgroup.com

T: (732)358-4027 F: (732)400-8475