


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

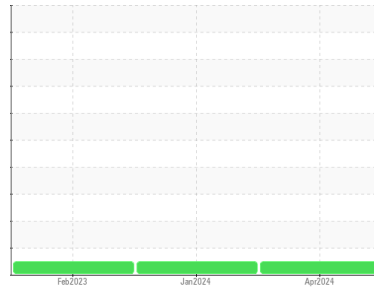

Area

**American Demo**

Machine Id

**SANY SY500H TA891 (S/N SY0507CC00268)**

Component

**Left Final Drive**

Fluid

**GEAR OIL SAE 80W90 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0115523</b>	LW0008264	LW0006612
Sample Date	Client Info			<b>09 Apr 2024</b>	04 Jan 2024	15 Feb 2023
Machine Age	hrs	Client Info		<b>1564</b>	1016	653
Oil Age	hrs	Client Info		<b>1564</b>	1016	653
Oil Changed	Client Info			<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>162</b>	132	100
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	2	<1
Lead	ppm	ASTM D5185m	>25	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>50	<b>0</b>	2	<1
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	<b>&lt;1</b>	0	<1
Barium	ppm	ASTM D5185m	200	<b>8</b>	12	9
Molybdenum	ppm	ASTM D5185m	12	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>2</b>	2	2
Magnesium	ppm	ASTM D5185m	12	<b>0</b>	<1	<1
Calcium	ppm	ASTM D5185m	150	<b>&lt;1</b>	1	4
Phosphorus	ppm	ASTM D5185m	1650	<b>128</b>	134	128
Zinc	ppm	ASTM D5185m	125	<b>0</b>	0	4
Sulfur	ppm	ASTM D5185m	22500	<b>16039</b>	15244	16040

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>9</b>	9	8
Sodium	ppm	ASTM D5185m	>170	<b>3</b>	0	3
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	<1

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT








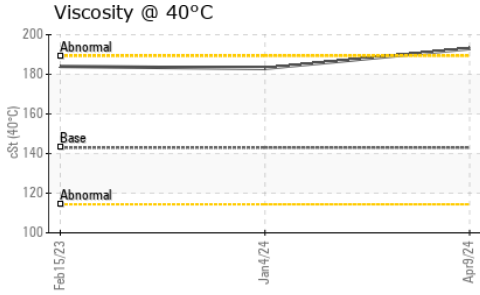


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	143	<b>193</b>	183	184

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

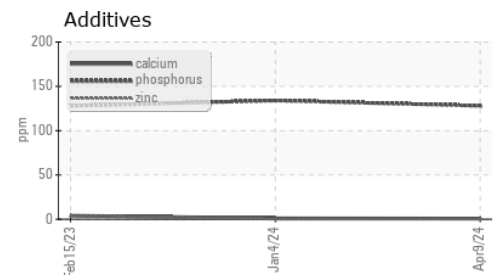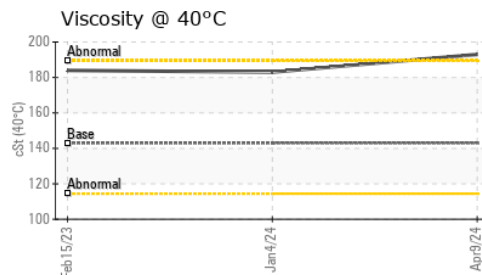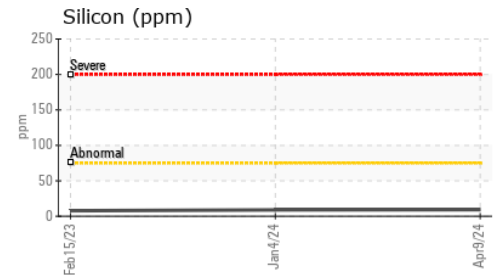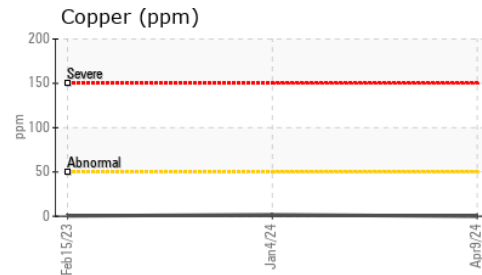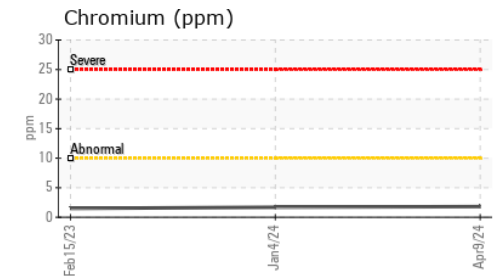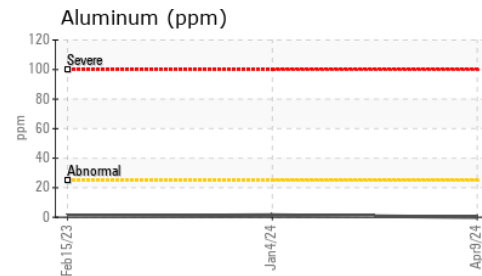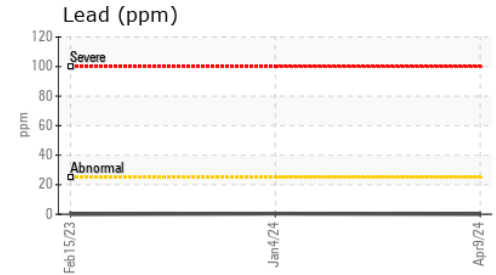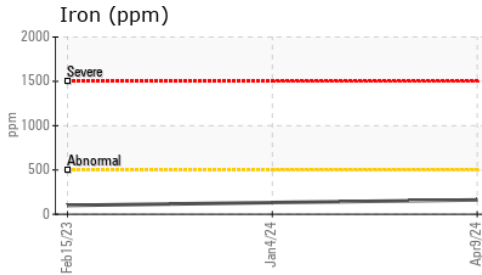

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0115523  
**Lab Number** : 06147692  
**Unique Number** : 10977770  
**Test Package** : MOB 1

**Received** : 12 Apr 2024  
**Tested** : 15 Apr 2024  
**Diagnosed** : 16 Apr 2024 - Sean Felton

**CHICAGO MACHINERY INC**  
 3142 EAST LINCOLN  
 LYNWOOD, IL  
 US 60411-7728  
 Contact: Mike Korblik  
 mike@chicagomachineryinc.com  
 T: (708)758-2060  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)