




# OIL ANALYSIS REPORT

## Sample Rating Trend

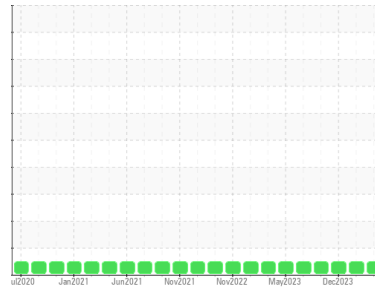

**NORMAL**



Machine Id  
**828029-1085**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0070948</b>	GFL0058058	GFL0100160
Sample Date	Client Info			<b>11 Apr 2024</b>	27 Mar 2024	26 Dec 2023
Machine Age	hrs	Client Info		<b>12874</b>	12806	11262
Oil Age	hrs	Client Info		<b>512</b>	444	450
Oil Changed	Client Info			<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>120	<b>19</b>	17	6
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	1	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	4	<1
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>1</b>	2	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>7</b>	4	3
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>61</b>	59	55
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	1010	<b>962</b>	928	917
Calcium	ppm	ASTM D5185m	1070	<b>1121</b>	1031	1068
Phosphorus	ppm	ASTM D5185m	1150	<b>970</b>	945	896
Zinc	ppm	ASTM D5185m	1270	<b>1186</b>	1216	1172
Sulfur	ppm	ASTM D5185m	2060	<b>3105</b>	3227	2510

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>8</b>	6	4
Sodium	ppm	ASTM D5185m		<b>6</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	0


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>4	<b>0.5</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.7</b>	8.5	8.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.8</b>	18.9	19.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.6</b>	15.3	15.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>6.1</b>	7.0	6.5




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

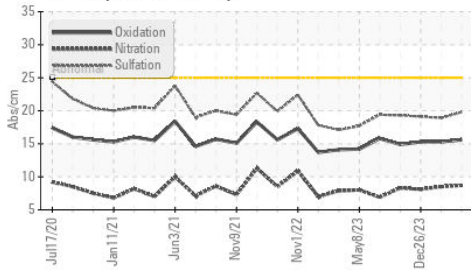

Base Number

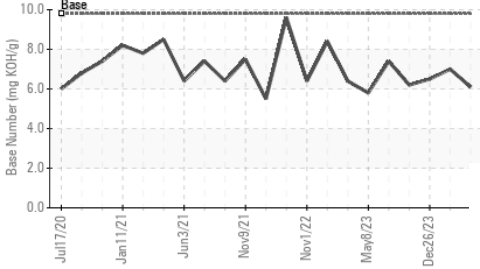

Viscosity @ 100°C

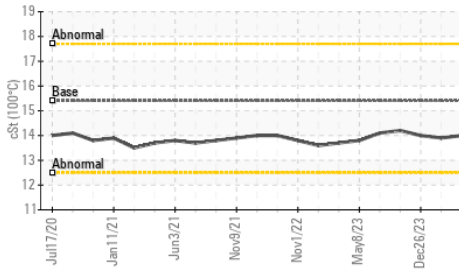


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	13.9

## GRAPHS


Ferrous Alloys

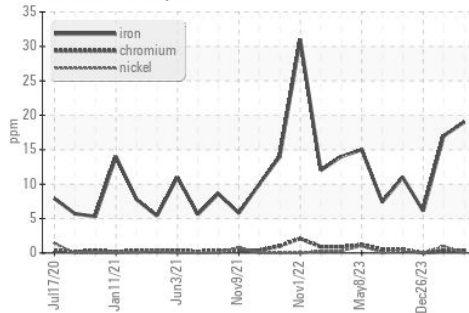


Non-ferrous Metals

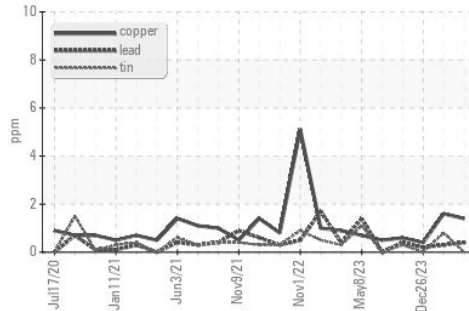

Viscosity @ 100°C

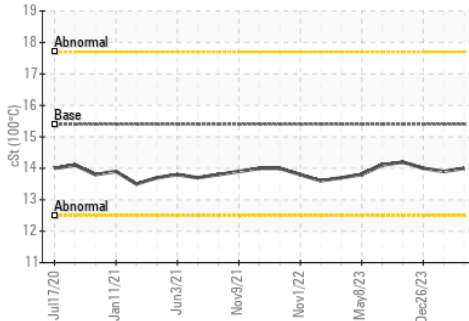

Base Number

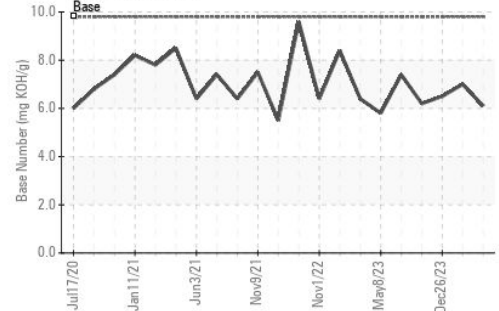

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0070948  
 Lab Number : 06148022  
 Unique Number : 10978100  
 Test Package : FLEET

Received : 12 Apr 2024  
 Tested : 15 Apr 2024  
 Diagnosed : 15 Apr 2024 - Wes Davis

GFL Environmental - 657 - Charlottesville Hauling  
 5498 Richmond Road  
 Troy, VA  
 US 22974

Contact: Brian Ulickas  
 bulickas@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: