




OIL ANALYSIS REPORT

Sample Rating Trend

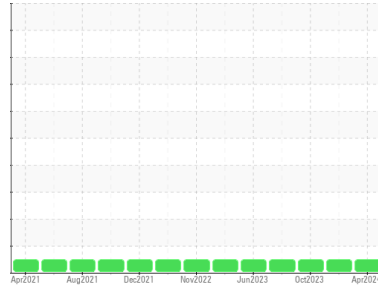

NORMAL



Machine Id

944021

Component

Natural Gas Engine

Fluid

PETRO CANADA DURON GEO LD 15W40 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0115471	GFL0106977	GFL0094258
Sample Date	Client Info	10 Apr 2024	06 Jan 2024	03 Oct 2023
Machine Age	hrs	15887	25007	14718
Oil Age	hrs	15887	0	0
Oil Changed	Client Info	Changed	N/A	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	18	19	21
Chromium	ppm	ASTM D5185m >4	0	<1	<1
Nickel	ppm	ASTM D5185m >2	0	0	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >9	<1	1	9
Lead	ppm	ASTM D5185m >30	0	0	0
Copper	ppm	ASTM D5185m >35	0	<1	23
Tin	ppm	ASTM D5185m >4	0	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 50	4	3	11
Barium	ppm	ASTM D5185m 5	0	0	0
Molybdenum	ppm	ASTM D5185m 50	56	57	53
Manganese	ppm	ASTM D5185m 0	0	<1	<1
Magnesium	ppm	ASTM D5185m 560	823	890	589
Calcium	ppm	ASTM D5185m 1510	996	1046	1490
Phosphorus	ppm	ASTM D5185m 780	979	1066	789
Zinc	ppm	ASTM D5185m 870	1132	1252	976
Sulfur	ppm	ASTM D5185m 2040	3095	3006	2691

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >+100	2	3	8
Sodium	ppm	ASTM D5185m	16	16	5
Potassium	ppm	ASTM D5185m >20	5	8	11

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	1.5	1.5	0
Nitration	Abs/cm	*ASTM D7624 >20	10.4	10.0	9.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.9	20.7	19.8


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.5	16.3	16.9
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	8.9	8.6	6.3




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

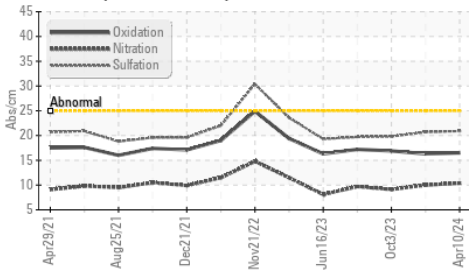

Base Number

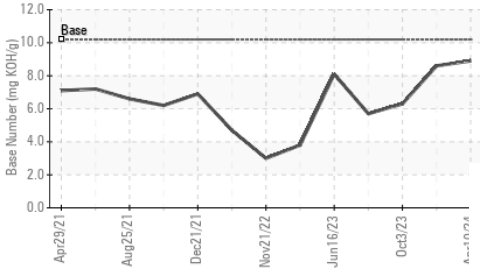

Viscosity @ 100°C

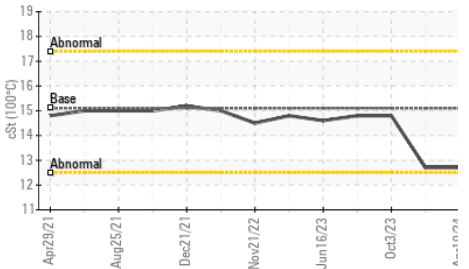

VISUAL


method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history1	history2		
Visc @ 100°C	cSt	ASTM D445	15.1	12.7	12.7	14.8

GRAPHS


Ferrous Alloys

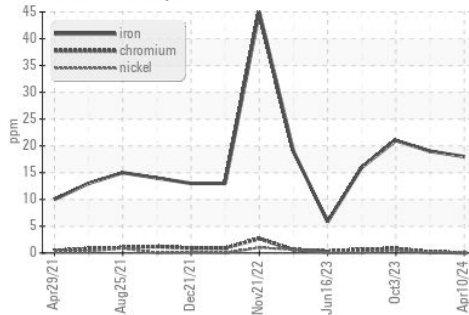


Non-ferrous Metals

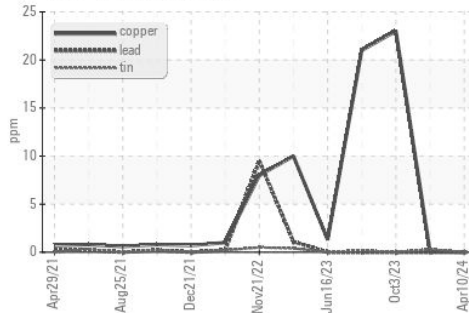

Viscosity @ 100°C

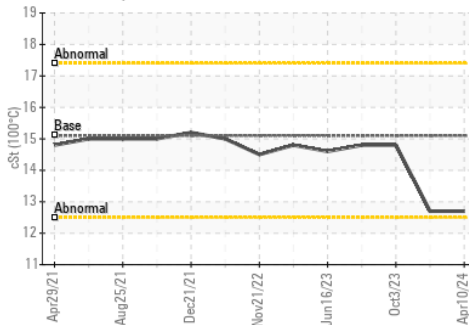

Base Number

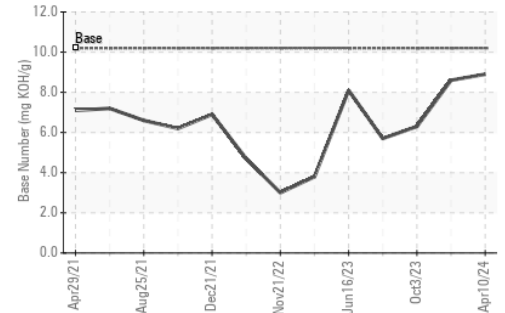

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0115471
 Lab Number : 06148208
 Unique Number : 10978286
 Test Package : FLEET

GFL Environmental - 882 - Gainesville
 5002 SW 41st Blvd
 Gainesville, FL
 US 32608

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: ROBERT CLARK
 robert.clark@gflenv.com

T:
 F: