




# OIL ANALYSIS REPORT

Sample Rating Trend

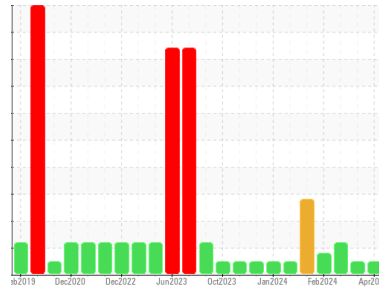

**NORMAL**



Machine Id  
**727105-310043**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0105204</b>  | GFL0105077  | GFL0105192  |
| Sample Date   | Client Info |             | <b>11 Apr 2024</b> | 25 Mar 2024 | 19 Mar 2024 |
| Machine Age   | hrs         | Client Info | <b>18759</b>       | 18692       | 18636       |
| Oil Age       | hrs         | Client Info | <b>150</b>         | 10          | 600         |
| Oil Changed   | Client Info |             | <b>Not Changed</b> | Changed     | Changed     |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | ATTENTION   |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current  | history1 | history2 |
|----------|--------|------------------|----------|----------|----------|
| Iron     | ppm    | ASTM D5185m >110 | <b>1</b> | 5        | 41       |
| Chromium | ppm    | ASTM D5185m >4   | <b>0</b> | <1       | 2        |
| Nickel   | ppm    | ASTM D5185m >2   | <b>0</b> | <1       | 1        |
| Titanium | ppm    | ASTM D5185m      | <b>0</b> | <1       | <1       |
| Silver   | ppm    | ASTM D5185m >2   | <b>0</b> | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >25  | <b>0</b> | 1        | 9        |
| Lead     | ppm    | ASTM D5185m >45  | <b>0</b> | 1        | <1       |
| Copper   | ppm    | ASTM D5185m >85  | <b>0</b> | 1        | 1        |
| Tin      | ppm    | ASTM D5185m >4   | <b>0</b> | <1       | <1       |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b> | <1       | <1       |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b> | <1       | 0        |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 2        | <1       |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>     | <1       | 0        |
| Molybdenum | ppm    | ASTM D5185m 60   | <b>51</b>    | 61       | 94       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>0</b>     | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m 1010 | <b>831</b>   | 889      | 1368     |
| Calcium    | ppm    | ASTM D5185m 1070 | <b>957</b>   | 1046     | 1500     |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>963</b>   | 1070     | 1436     |
| Zinc       | ppm    | ASTM D5185m 1270 | <b>1087</b>  | 1160     | 1789     |
| Sulfur     | ppm    | ASTM D5185m 2060 | <b>3055</b>  | 3180     | 4110     |

## CONTAMINANTS

|           | method | limit/base      | current  | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >30 | <b>3</b> | 5        | 12       |
| Sodium    | ppm    | ASTM D5185m     | <b>4</b> | 48       | 96       |
| Potassium | ppm    | ASTM D5185m >20 | <b>0</b> | 35       | 11       |

## INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.2</b>  | 0.1      | 1        |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>6.1</b>  | 4.4      | 10.5     |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>18.0</b> | 17.3     | 21.6     |


## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>14.2</b> | 13.1     | 18.2     |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8  | <b>8.6</b>  | 9.0      | 8.1      |




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

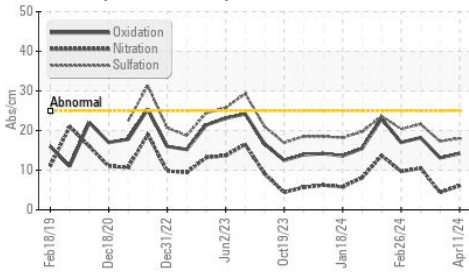

Base Number

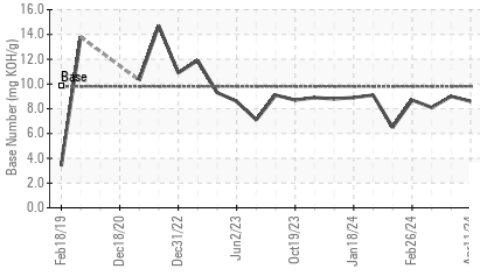

Viscosity @ 100°C

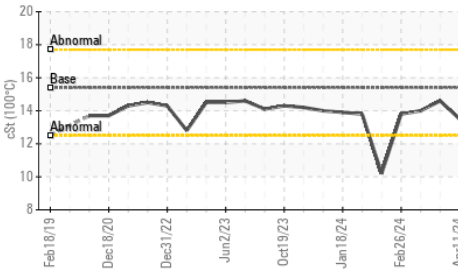


| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 13.5     | 14.6     |

## GRAPHS


Ferrous Alloys

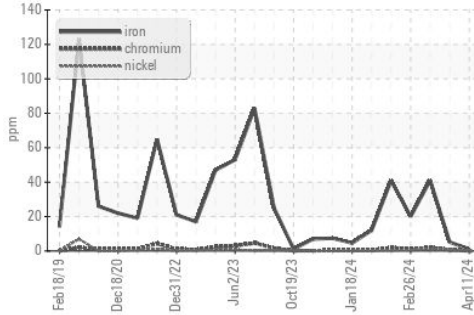


Non-ferrous Metals

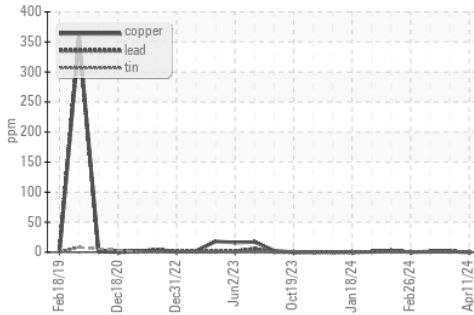

Viscosity @ 100°C

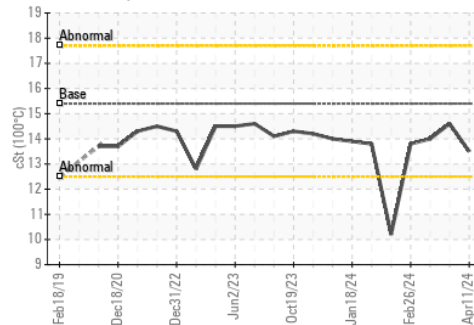

Base Number

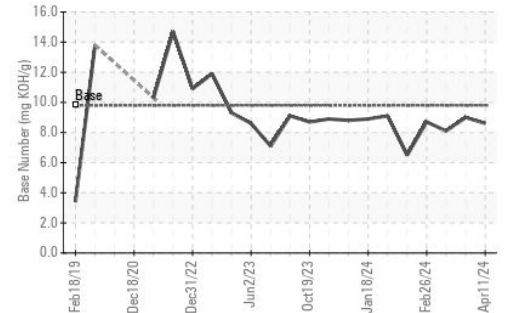

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0105204  
 Lab Number : 06148267  
 Unique Number : 10978345  
 Test Package : FLEET

Received : 15 Apr 2024  
 Tested : 15 Apr 2024  
 Diagnosed : 15 Apr 2024 - Wes Davis

GFL Environmental - 821 - Ozarks Hauling  
 33924 Olath Drive  
 Lebanon, MO  
 US 65536

Contact: Landen Johnson  
 landen.johnson@gflenv.com  
 T: (417)664-0010

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)