




OIL ANALYSIS REPORT

Sample Rating Trend

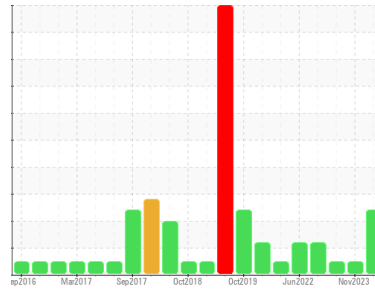

COOLANT



Machine Id
10662
 Component
Diesel Engine
 Fluid

PETRO CANADA DURON SHP 15W40 (6 GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

Sodium and/or potassium levels are high. Test for glycol is negative.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0104073	GFL0068126	GFL0068151
Sample Date	Client Info	11 Apr 2024	02 Nov 2023	17 May 2023
Machine Age	hrs	1492	1188	862
Oil Age	hrs	600	600	600
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	47	17	29
Chromium	ppm ASTM D5185m >5	3	<1	1
Nickel	ppm ASTM D5185m >4	<1	<1	1
Titanium	ppm ASTM D5185m >2	0	0	<1
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >15	4	4	4
Lead	ppm ASTM D5185m >25	0	<1	<1
Copper	ppm ASTM D5185m >100	0	1	7
Tin	ppm ASTM D5185m >4	0	0	1
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	5	7	15
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	62	62	64
Manganese	ppm ASTM D5185m 0	0	<1	<1
Magnesium	ppm ASTM D5185m 1010	876	947	973
Calcium	ppm ASTM D5185m 1070	1071	1068	1153
Phosphorus	ppm ASTM D5185m 1150	960	1014	1083
Zinc	ppm ASTM D5185m 1270	1145	1225	1350
Sulfur	ppm ASTM D5185m 2060	3006	3051	3971

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	8	7	8
Sodium	ppm ASTM D5185m	▲ 93	38	32
Potassium	ppm ASTM D5185m >20	▲ 47	5	5

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0.8	0.3	0.1
Nitration	Abs/cm *ASTM D7624 >20	10.3	7.0	7.5
Sulfation	Abs/.1mm *ASTM D7415 >30	21.0	18.6	16.7


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	17.0	14.0	13.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.2	8.9	11.6




OIL ANALYSIS REPORT


Glycol Contamination

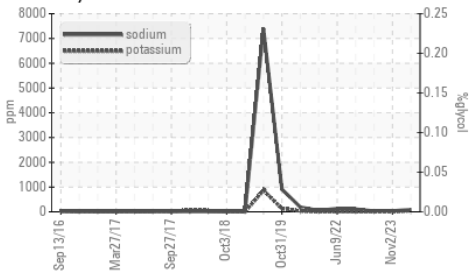


FT-IR (Direct Trend)

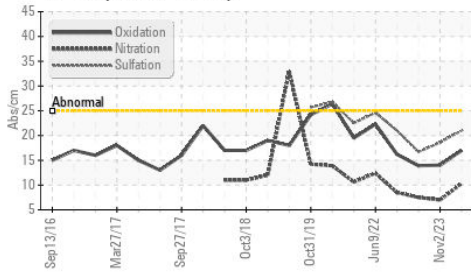

Base Number

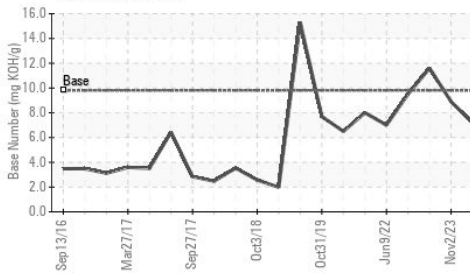

Viscosity @ 100°C

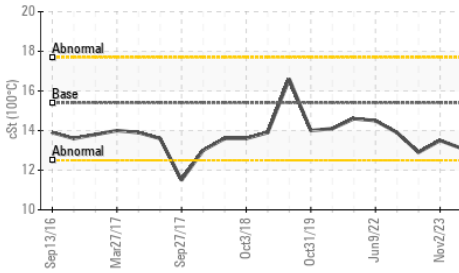


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	13.5

GRAPHS


Ferrous Alloys

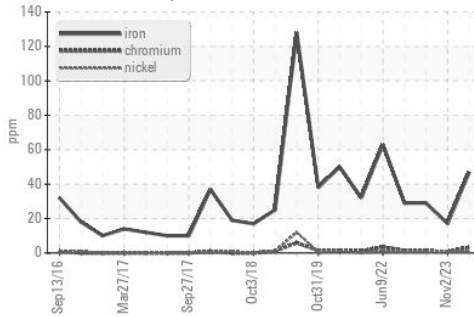


Non-ferrous Metals

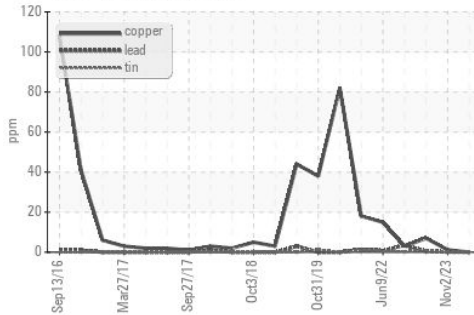

Viscosity @ 100°C

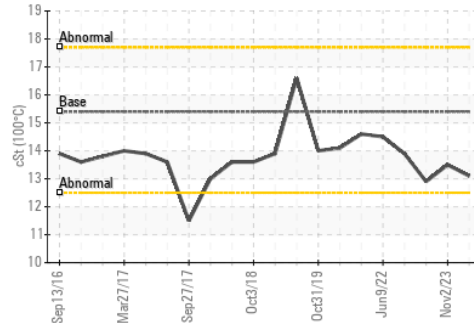

Base Number

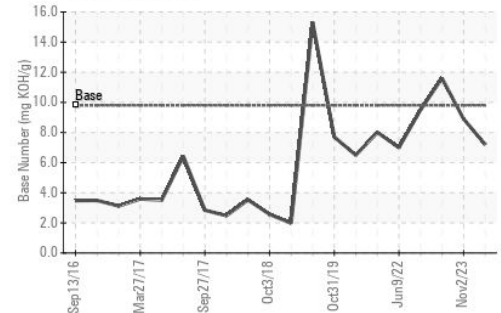

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0104073

Lab Number : 06148288

Unique Number : 10978366

Test Package : FLEET

Received : 15 Apr 2024

Tested : 15 Apr 2024

Diagnosed : 17 Apr 2024 - Jonathan Hester

GFL Environmental - 028 - Weldon

2211 US Highway 301

Halifax, NC

US 27839

Contact: TRAVIS PORCH

tporch@gflenv.com

T: (252)532-3344

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)