




# OIL ANALYSIS REPORT

## Sample Rating Trend

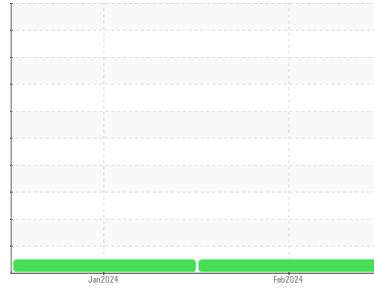

**NORMAL**



Machine Id  
**INTERNATIONAL 126057-SWV6610**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC ELITE 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0095460</b>	GFL0095481	---
Sample Date	Client Info		<b>27 Feb 2024</b>	08 Jan 2024	---
Machine Age	hrs	Client Info	<b>20425</b>	20555	---
Oil Age	hrs	Client Info	<b>0</b>	500	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>7</b>	18	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	7	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>120</b>	55	---
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	8	---
Molybdenum	ppm	ASTM D5185m	<b>136</b>	110	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m	<b>678</b>	628	---
Calcium	ppm	ASTM D5185m	<b>1283</b>	1155	---
Phosphorus	ppm	ASTM D5185m	<b>725</b>	685	---
Zinc	ppm	ASTM D5185m	<b>853</b>	760	---
Sulfur	ppm	ASTM D5185m	<b>3246</b>	2953	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	5	---
Sodium	ppm	ASTM D5185m	<b>1</b>	2	---
Potassium	ppm	ASTM D5185m >20	<b>4</b>	6	---

### INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.5</b>	11.3	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.6</b>	19.9	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.1</b>	18.5	---
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	<b>6.4</b>	5.4	---







# OIL ANALYSIS REPORT

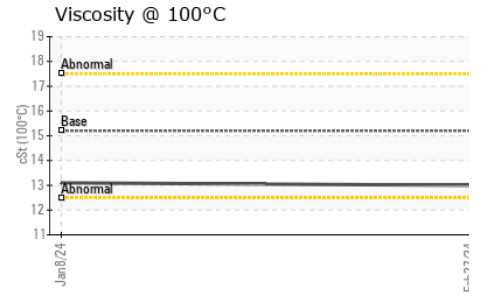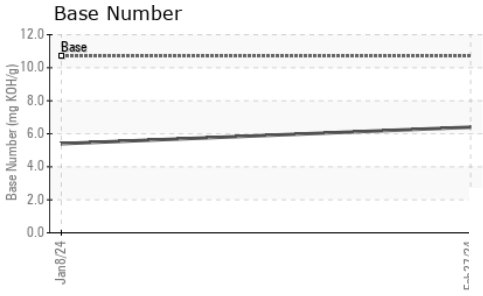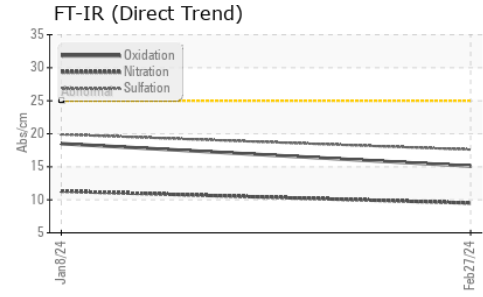

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.2	13.0	13.1

## GRAPHS

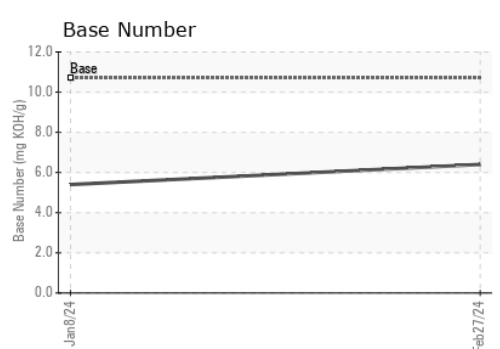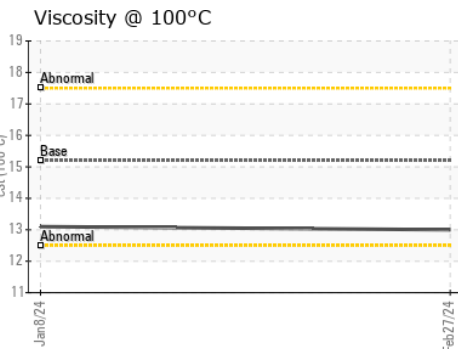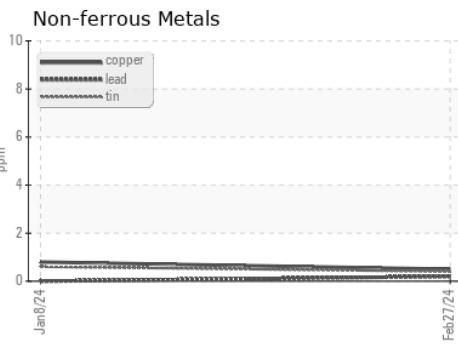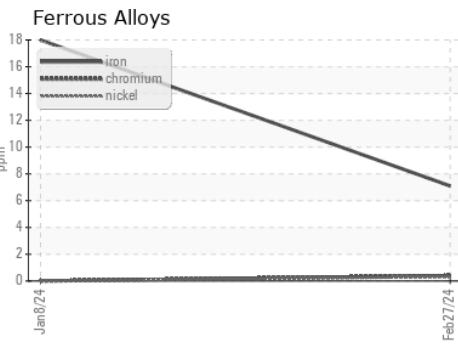

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0095460      **Received** : 15 Apr 2024  
**Lab Number** : 06148309      **Tested** : 15 Apr 2024  
**Unique Number** : 10978387      **Diagnosed** : 15 Apr 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 981 - Port Arthur Hauling**  
 1000 S Business Park Dr  
 Port Arthur, TX  
 US 77640  
 Contact: MICHAEL KAY  
 mkay@gflenv.com  
 T: (336)660-9331  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)