


OIL ANALYSIS REPORT



Area
[68978]
Machine Id
OHT101
Component
Rear Differential
Fluid
PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)

Sample Rating Trend

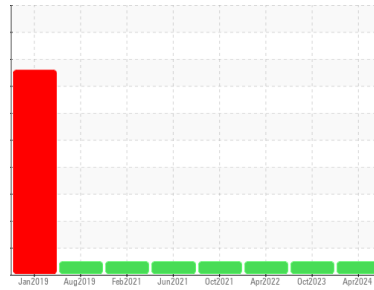

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: PM-1 sampled fluid)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0109221	PCA0084717	PCA0062665
Sample Date	Client Info		04 Apr 2024	19 Oct 2023	05 Apr 2022
Machine Age	hrs	Client Info	17749	17273	16935
Oil Age	hrs	Client Info	17749	17273	16717
Oil Changed	Client Info		N/A	N/A	Not Changd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	57	69	44
Chromium	ppm	ASTM D5185m >3	1	<1	<1
Nickel	ppm	ASTM D5185m >3	<1	<1	0
Titanium	ppm	ASTM D5185m >2	<1	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >30	3	2	3
Lead	ppm	ASTM D5185m >13	<1	0	<1
Copper	ppm	ASTM D5185m >103	9	29	6
Tin	ppm	ASTM D5185m >5	1	2	<1
Antimony	ppm	ASTM D5185m >5	---	---	---
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	5	45	38
Barium	ppm	ASTM D5185m 0	1	19	0
Molybdenum	ppm	ASTM D5185m 0	8	6	4
Manganese	ppm	ASTM D5185m 0	1	1	<1
Magnesium	ppm	ASTM D5185m 9	18	13	13
Calcium	ppm	ASTM D5185m 3114	3668	2941	2828
Phosphorus	ppm	ASTM D5185m 1099	986	1086	1027
Zinc	ppm	ASTM D5185m 1245	1173	1075	1055
Sulfur	ppm	ASTM D5185m 7086	4894	10573	6966


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	26	35	18
Sodium	ppm	ASTM D5185m	1	4	1
Potassium	ppm	ASTM D5185m >20	2	1	2

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

OIL ANALYSIS REPORT

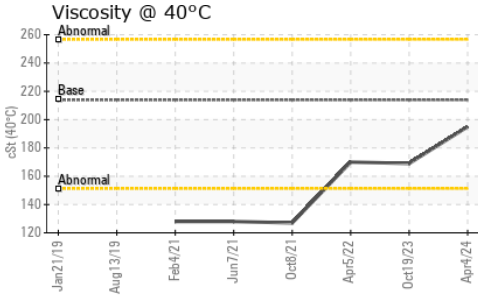









FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	213.9	195	169	170

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

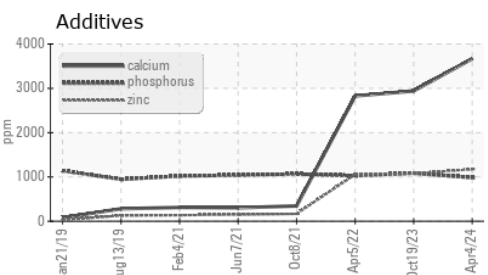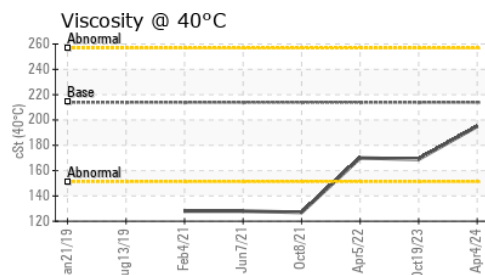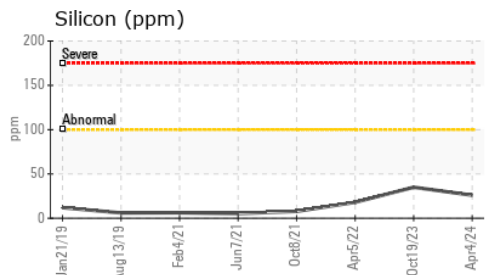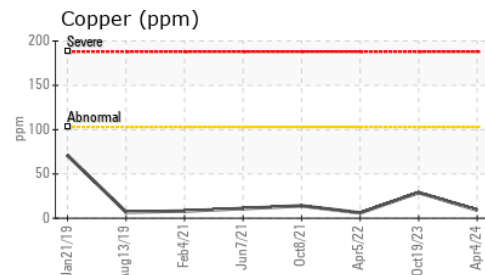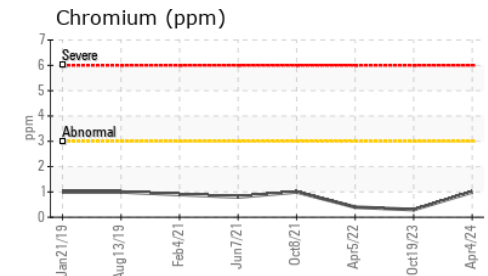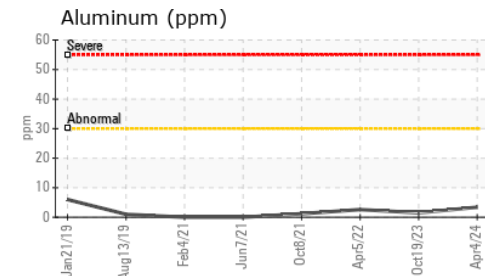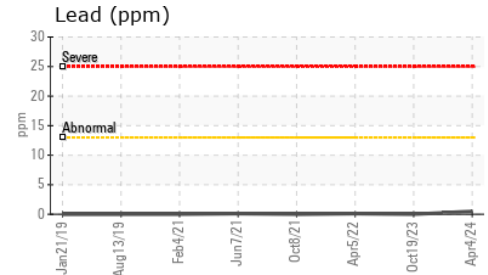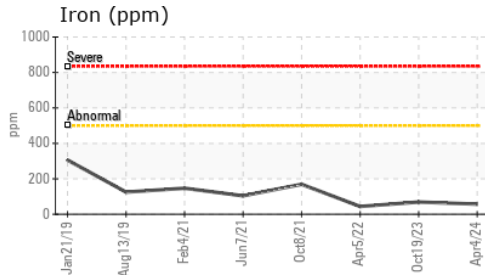

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109221 **Received** : 15 Apr 2024
Lab Number : 06149073 **Tested** : 16 Apr 2024
Unique Number : 10979151 **Diagnosed** : 17 Apr 2024 - Sean Felton
Test Package : MOB 1

Kemp Quarries - Muskogee Sand
 3395 W 50th St N
 Porter, OK
 US 74454
 Contact: muskogee@muskogeesand.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: