




# OIL ANALYSIS REPORT

Sample Rating Trend

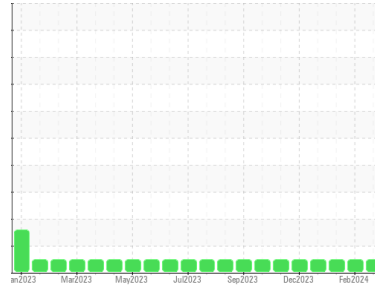

**NORMAL**



Area  
**(DUX582)**  
 Machine Id  
**10690**  
 Component  
**Transmission (Auto)**  
 Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0115677</b>	GFL0112351	GFL0109940
Sample Date	Client Info		<b>12 Apr 2024</b>	26 Feb 2024	30 Jan 2024
Machine Age	hrs	Client Info	<b>422</b>	128	20431
Oil Age	hrs	Client Info	<b>152</b>	855	696
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	<b>81</b>	85	92
Chromium	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >50	<b>9</b>	9	7
Lead	ppm	ASTM D5185m >50	<b>0</b>	0	2
Copper	ppm	ASTM D5185m >225	<b>6</b>	6	7
Tin	ppm	ASTM D5185m >10	<b>0</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>53</b>	69	67
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	5	6
Calcium	ppm	ASTM D5185m	<b>107</b>	116	120
Phosphorus	ppm	ASTM D5185m	<b>197</b>	225	240
Zinc	ppm	ASTM D5185m	<b>33</b>	40	27
Sulfur	ppm	ASTM D5185m	<b>1599</b>	1558	1825

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>8</b>	8	9
Sodium	ppm	ASTM D5185m	<b>5</b>	4	0
Potassium	ppm	ASTM D5185m >20	<b>0</b>	1	2

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT

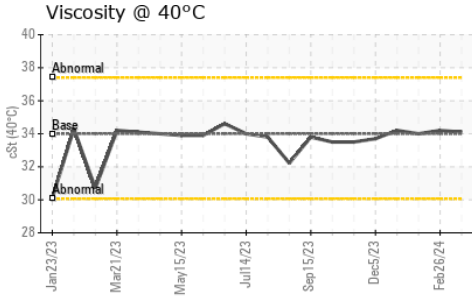




## FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 34	<b>34.1</b>	34.2	34.0

## SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

## GRAPHS

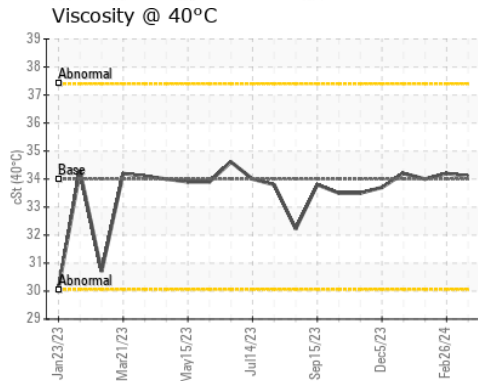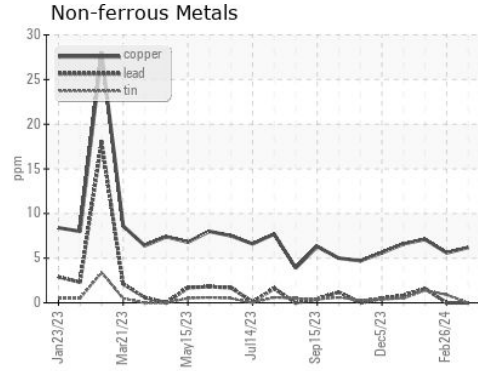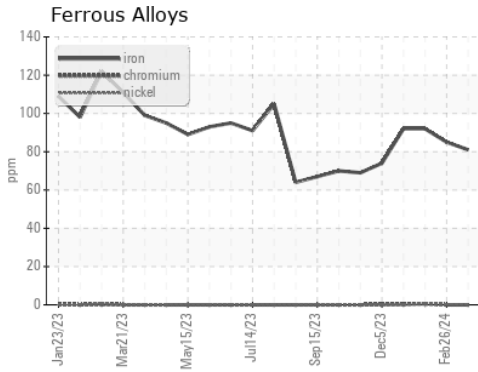

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115677  
**Lab Number** : 06149174  
**Unique Number** : 10979252  
**Test Package** : FLEET

**Received** : 15 Apr 2024  
**Tested** : 16 Apr 2024  
**Diagnosed** : 16 Apr 2024 - Wes Davis

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: TECHNICIAN ACCOUNT  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: