


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

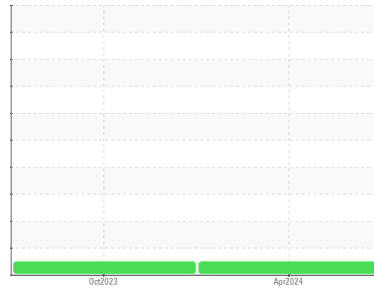

Area  
**(262052D) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136G47364**  
 Component  
**Gasoline Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0118740</b>	PCA0103820	---
Sample Date	Client Info			<b>10 Apr 2024</b>	02 Oct 2023	---
Machine Age	mls	Client Info		<b>51264</b>	50587	---
Oil Age	mls	Client Info		<b>677</b>	451	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	<b>10</b>	2	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>40	<b>2</b>	3	---
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>155	<b>1</b>	<1	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>4</b>	1	---
Barium	ppm	ASTM D5185m	0	<b>1</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>62</b>	59	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m	950	<b>959</b>	958	---
Calcium	ppm	ASTM D5185m	1050	<b>1103</b>	1033	---
Phosphorus	ppm	ASTM D5185m	995	<b>1039</b>	1011	---
Zinc	ppm	ASTM D5185m	1180	<b>1226</b>	1239	---
Sulfur	ppm	ASTM D5185m	2600	<b>3270</b>	3206	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>4</b>	<1	---
Sodium	ppm	ASTM D5185m	>400	<b>2</b>	<1	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0.1</b>	0	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.6</b>	6.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.7</b>	17.0	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.4</b>	13.2	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>9.2</b>	8.9	---





# OIL ANALYSIS REPORT

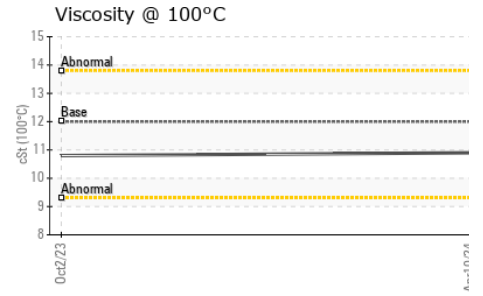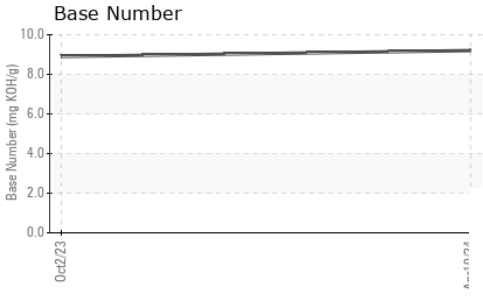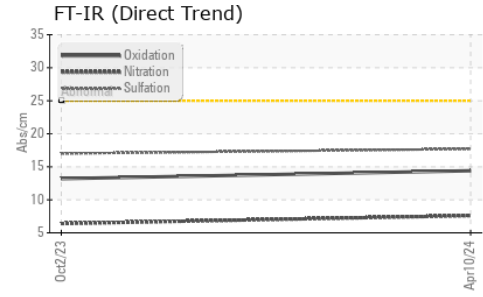

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.9</b>	10.8

## GRAPHS

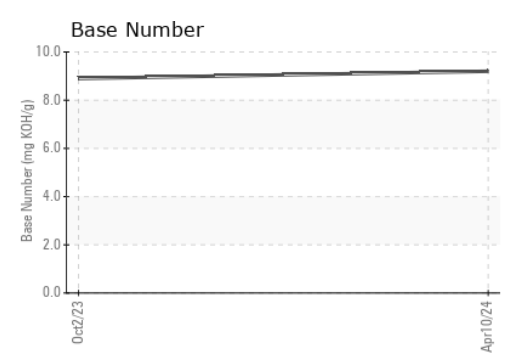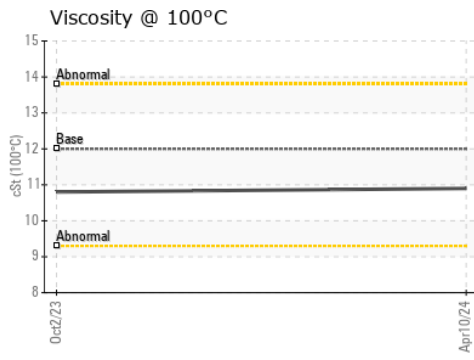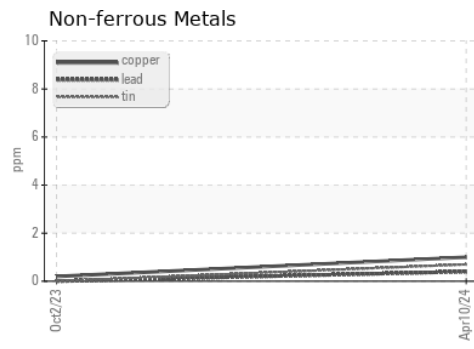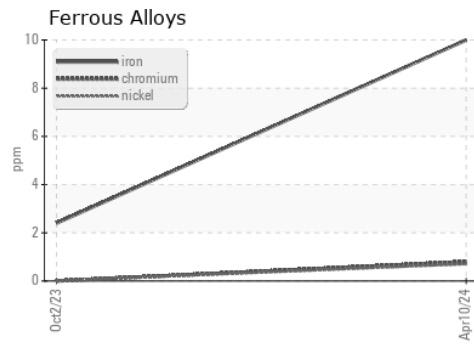

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0118740      **Received** : 16 Apr 2024  
**Lab Number** : **06149764**      **Tested** : 17 Apr 2024  
**Unique Number** : 10979842      **Diagnosed** : 17 Apr 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1364 - Berkeley-Mt. Vernon**  
 5100 Lake Terrace NE  
 Mt. Vernon, IL  
 US 62864  
 Contact: Erien White  
 ewhite@transervice.com  
 T: (618)244-8726  
 F: (618)244-8791

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)