


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

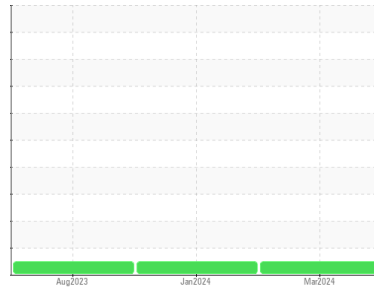

Area
Walgreens - Tractor
 Machine No
[Walgreens - Tractor] 136A63367
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | PCA0117892 | PCA0105444 | PCA0093784 |
| Sample Date | Client Info | | 22 Mar 2024 | 09 Jan 2024 | 09 Aug 2023 |
| Machine Age | mls | Client Info | 76372 | 67153 | 41619 |
| Oil Age | mls | Client Info | 50000 | 17248 | 41619 |
| Oil Changed | Client Info | | Changed | Not Changd | Changed |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >2.0 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >100 | 40 | 33 | 57 |
| Chromium | ppm | ASTM D5185m >20 | 4 | 4 | 2 |
| Nickel | ppm | ASTM D5185m >4 | 2 | 3 | 4 |
| Titanium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m >3 | <1 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m >20 | 51 | 40 | 31 |
| Lead | ppm | ASTM D5185m >40 | 4 | 4 | 9 |
| Copper | ppm | ASTM D5185m >330 | 8 | 8 | 36 |
| Tin | ppm | ASTM D5185m >15 | 2 | 2 | 4 |
| Vanadium | ppm | ASTM D5185m | 0 | <1 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 2 | 9 | 9 | 32 |
| Barium | ppm | ASTM D5185m 0 | <1 | 0 | 6 |
| Molybdenum | ppm | ASTM D5185m 50 | 62 | 57 | 65 |
| Manganese | ppm | ASTM D5185m 0 | 2 | 2 | 6 |
| Magnesium | ppm | ASTM D5185m 950 | 879 | 855 | 434 |
| Calcium | ppm | ASTM D5185m 1050 | 1255 | 1213 | 1778 |
| Phosphorus | ppm | ASTM D5185m 995 | 1044 | 1000 | 982 |
| Zinc | ppm | ASTM D5185m 1180 | 1295 | 1273 | 1263 |
| Sulfur | ppm | ASTM D5185m 2600 | 3469 | 2952 | 3052 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|------------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 13 | 13 | 42 |
| Sodium | ppm | ASTM D5185m | 2 | 2 | 2 |
| Potassium | ppm | ASTM D5185m >20 | 178 | 133 | 86 |





INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >3 | 0.4 | 0.3 | 0.4 |
| Nitration | Abs/cm | *ASTM D7624 >20 | 9.6 | 8.6 | 9.6 |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 21.9 | 20.7 | 23.5 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 18.4 | 16.9 | 21.0 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 5.9 | 6.9 | 5.4 |





OIL ANALYSIS REPORT

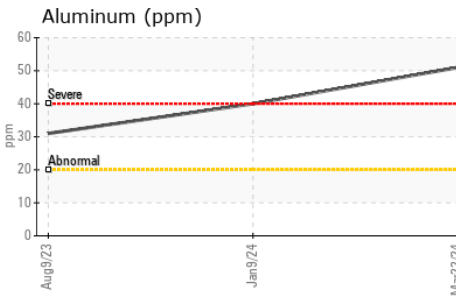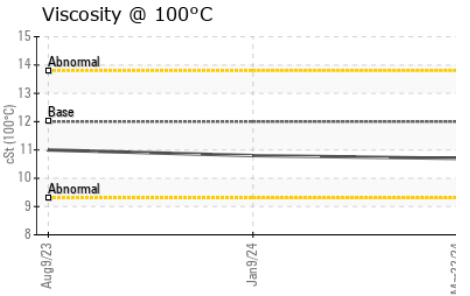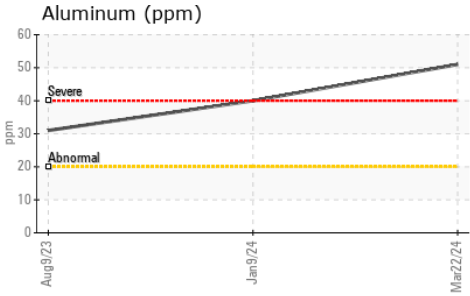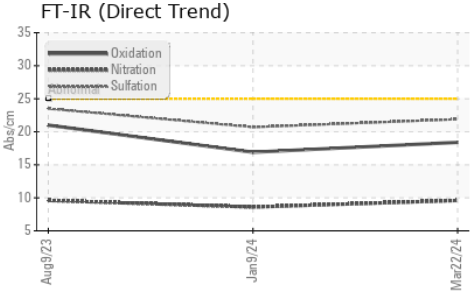

| PARAMETER | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 12.00 | 10.7 | 10.8 |

GRAPHS

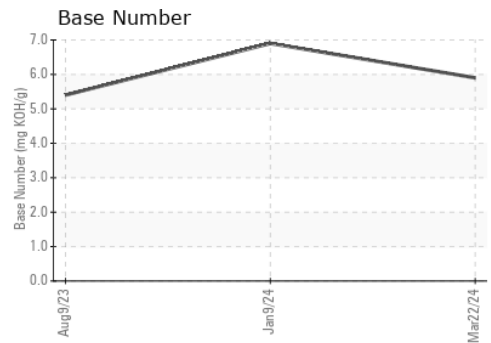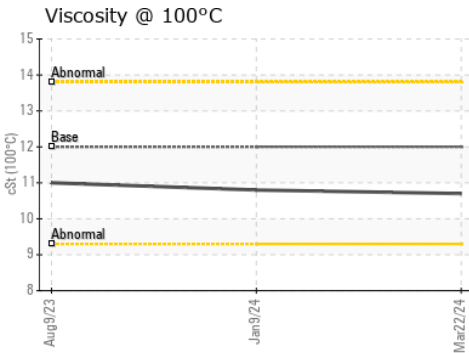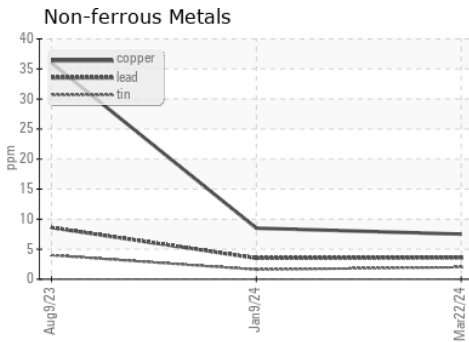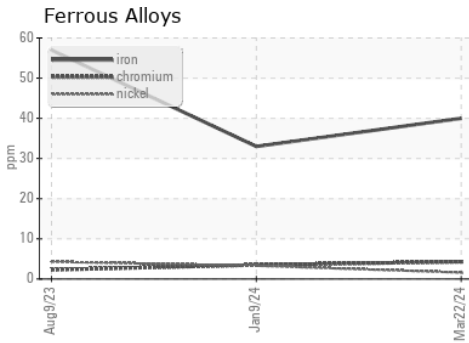

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0117892
Lab Number : 06149955
Unique Number : 10980033
Test Package : FLEET

Received : 16 Apr 2024
Tested : 17 Apr 2024
Diagnosed : 17 Apr 2024 - Wes Davis

Transervice - Shop 1366 - Berkeley-Woodland
 2370 East Main Street
 Woodland, CA
 US 95776

Contact: Gary Mann
 gmanna@transervice.com

T: (530)666-7771
 F: (530)406-7971

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)