




OIL ANALYSIS REPORT

Sample Rating Trend

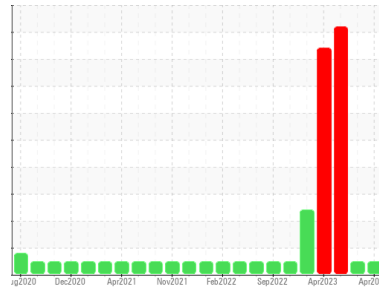

NORMAL



Area
(YA156314) GFL035

Machine Id
810011

Component
Diesel Engine

Fluid
 DIESEL ENGINE OIL SAE 40 (38 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0116414	GFL0102355	GFL0071625
Sample Date	Client Info			01 Apr 2024	01 Feb 2024	10 Oct 2023
Machine Age	mls Client Info			91647	440	440
Oil Age	mls Client Info			0	600	600
Oil Changed	Client Info			N/A	Not Changd	Changed
Sample Status				NORMAL	NORMAL	SEVERE

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	▲ 0.10

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	8	4	35
Chromium	ppm	ASTM D5185m	>5	<1	<1	1
Nickel	ppm	ASTM D5185m	>4	0	0	3
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	3	1
Lead	ppm	ASTM D5185m	>25	0	0	<1
Copper	ppm	ASTM D5185m	>100	42	0	▲ 215
Tin	ppm	ASTM D5185m	>4	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	3	0	5
Barium	ppm	ASTM D5185m	10	0	<1	2
Molybdenum	ppm	ASTM D5185m	100	64	59	70
Manganese	ppm	ASTM D5185m		<1	<1	2
Magnesium	ppm	ASTM D5185m	450	1048	944	906
Calcium	ppm	ASTM D5185m	3000	1172	1078	1046
Phosphorus	ppm	ASTM D5185m	1150	1190	1063	991
Zinc	ppm	ASTM D5185m	1350	1377	1278	1245
Sulfur	ppm	ASTM D5185m	4250	3751	3095	2996

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	2	13
Sodium	ppm	ASTM D5185m	>216	7	1	▲ 250
Potassium	ppm	ASTM D5185m	>20	3	2	▲ 249


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	0.1	0.3	0.6
Nitration	Abs/cm	*ASTM D7624	>20	6.3	5.9	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.6	17.8	20.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	13.5	16.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.1	9.0	8.0




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

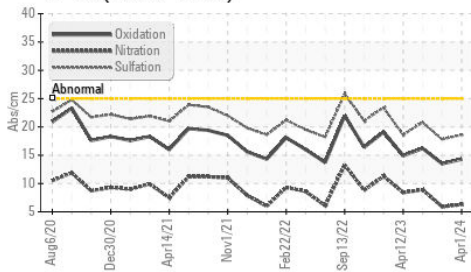

Base Number

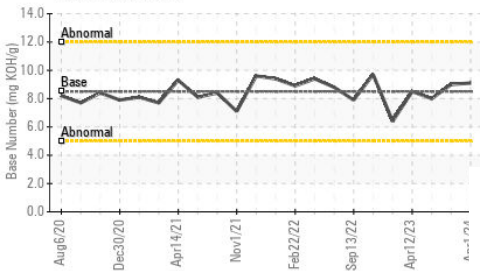

Viscosity @ 100°C

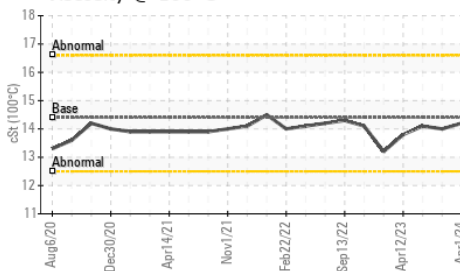


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	14.2	14.0

GRAPHS


Ferrous Alloys

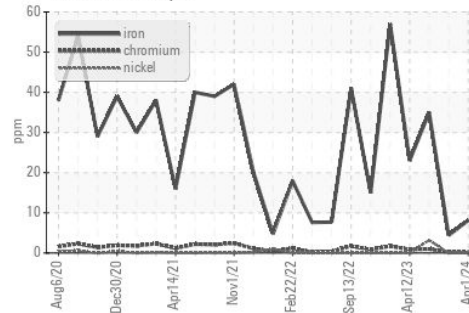


Non-ferrous Metals

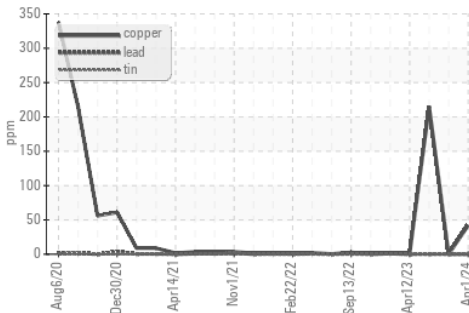

Viscosity @ 100°C

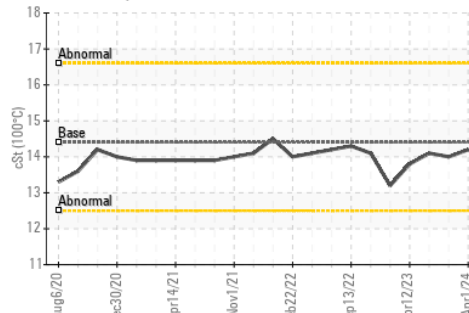

Base Number

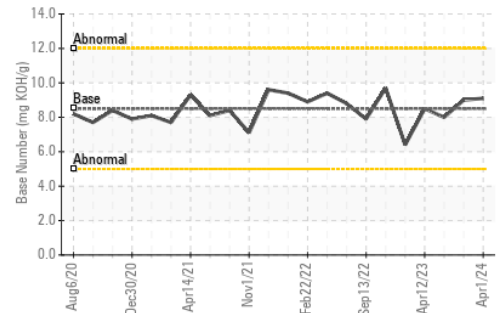

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0116414
Lab Number : 06150031
Unique Number : 10980109
Test Package : FLEET

Received : 16 Apr 2024
Tested : 17 Apr 2024
Diagnosed : 17 Apr 2024 - Wes Davis

GFL Environmental - 035 - Greensboro
 1236 Elon Place
 High Point, NC
 US 27263
 Contact: JORGE COSTA
 jorge.costa@gflenv.com
 T: (336)668-3712
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)