


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

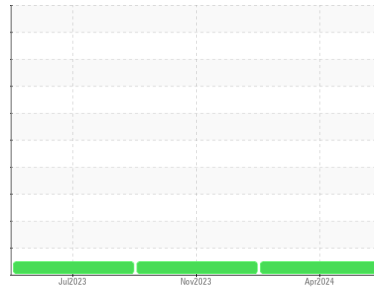

Area
(AU683W) Supermarket - Tractor
Machine Id
FREIGHTLINER 107A1844
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | PCA0116955 | PCA0110987 | PCA0099849 |
| Sample Date | Client Info | | 04 Apr 2024 | 22 Nov 2023 | 24 Jul 2023 |
| Machine Age | mls | Client Info | 235778 | 224786 | 212786 |
| Oil Age | mls | Client Info | 10992 | 26932 | 14932 |
| Oil Changed | Client Info | | Changed | Changed | Not Changed |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >80 | 10 | 22 | 12 |
| Chromium | ppm | ASTM D5185m >5 | <1 | <1 | 1 |
| Nickel | ppm | ASTM D5185m >2 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >30 | 7 | 10 | 8 |
| Lead | ppm | ASTM D5185m >30 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m >150 | 2 | 4 | 2 |
| Tin | ppm | ASTM D5185m >5 | <1 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 2 | 7 | 2 | 6 |
| Barium | ppm | ASTM D5185m 0 | 0 | 3 | 2 |
| Molybdenum | ppm | ASTM D5185m 50 | 69 | 70 | 70 |
| Manganese | ppm | ASTM D5185m 0 | <1 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m 950 | 1015 | 894 | 1038 |
| Calcium | ppm | ASTM D5185m 1050 | 1137 | 1058 | 1214 |
| Phosphorus | ppm | ASTM D5185m 995 | 1163 | 992 | 1118 |
| Zinc | ppm | ASTM D5185m 1180 | 1330 | 1192 | 1380 |
| Sulfur | ppm | ASTM D5185m 2600 | 3749 | 2874 | 3867 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m >20 | 4 | 6 | 5 |
| Sodium | ppm | ASTM D5185m | 1 | 0 | 2 |
| Potassium | ppm | ASTM D5185m >20 | 0 | 6 | 3 |




INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >3 | 0.4 | 1 | 0.6 |
| Nitration | Abs/cm | *ASTM D7624 >20 | 6.9 | 8.8 | 7.7 |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 18.7 | 21.3 | 19.0 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 14.2 | 16.4 | 14.3 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 8.9 | 6.6 | 8.3 |





OIL ANALYSIS REPORT

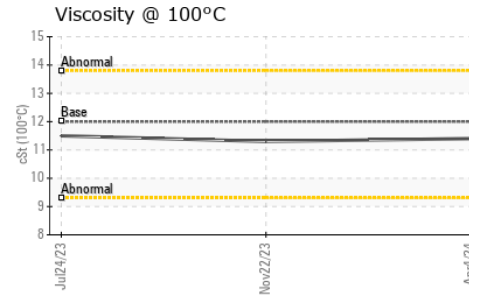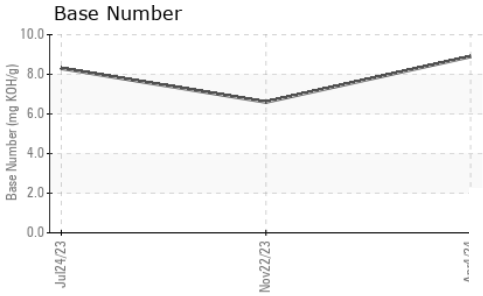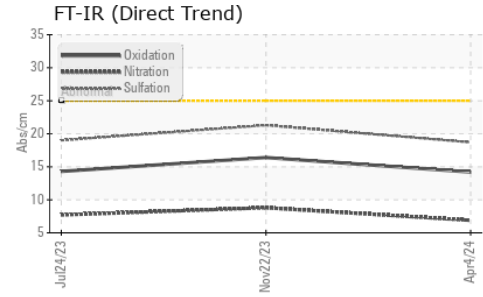

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|-----------------|-------------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 12.00 | 11.4 | 11.3 | 11.5 |

GRAPHS

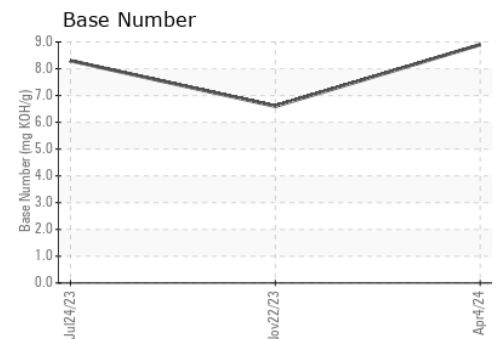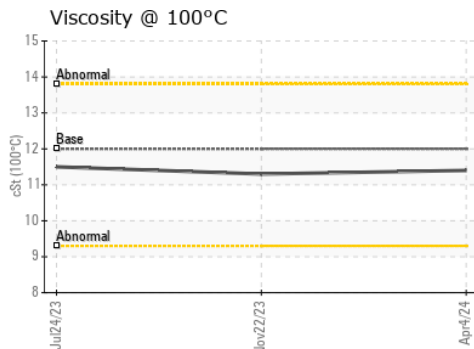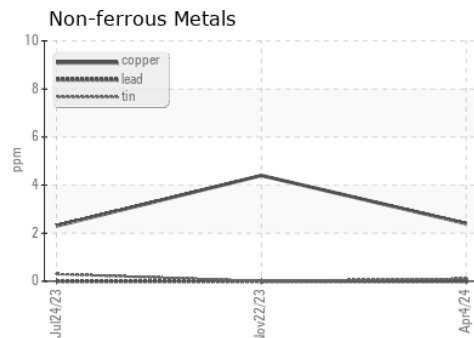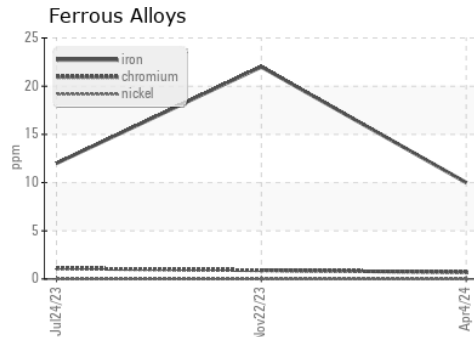

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0116955 **Received** : 16 Apr 2024
Lab Number : **06150109** **Tested** : 17 Apr 2024
Unique Number : 10980187 **Diagnosed** : 17 Apr 2024 - Wes Davis
Test Package : FLEET

Transervice - Shop 1071 - Supermarket-Dayton
 60 A Tower Road
 Dayton, NJ
 US 08810
 Contact: Brian Quinn
 bquinn@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)