


OIL ANALYSIS REPORT

Area
Charlestown
 Machine Id
676
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

Sample Rating Trend

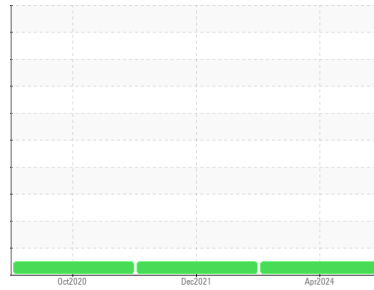

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0104521	WC0594324	PCA0023021
Sample Date	Client Info		12 Apr 2024	20 Dec 2021	05 Oct 2020
Machine Age	mls	Client Info	0	0	0
Oil Age	mls	Client Info	0	111921	34507
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	0.0

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	14	12	21
Chromium	ppm	ASTM D5185m >20	1	3	6
Nickel	ppm	ASTM D5185m >2	<1	<1	<1
Titanium	ppm	ASTM D5185m >2	<1	<1	<1
Silver	ppm	ASTM D5185m >2	0	<1	1
Aluminum	ppm	ASTM D5185m >30	8	11	27
Lead	ppm	ASTM D5185m >30	<1	<1	<1
Copper	ppm	ASTM D5185m >30	4	11	141
Tin	ppm	ASTM D5185m >15	1	<1	3
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	21	4	10
Barium	ppm	ASTM D5185m 0	1	0	0
Molybdenum	ppm	ASTM D5185m 50	54	62	56
Manganese	ppm	ASTM D5185m 0	<1	<1	1
Magnesium	ppm	ASTM D5185m 950	818	970	919
Calcium	ppm	ASTM D5185m 1050	1216	1123	1204
Phosphorus	ppm	ASTM D5185m 995	1029	981	987
Zinc	ppm	ASTM D5185m 1180	1173	1298	1189
Sulfur	ppm	ASTM D5185m 2600	3254	2736	2325

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	7	3	4
Sodium	ppm	ASTM D5185m	9	<1	2
Potassium	ppm	ASTM D5185m >20	7	16	56
Fuel	%	ASTM D3524 >3.0	1.3	<1.0	<1.0





INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.4	0.5	0.6
Nitration	Abs/cm	*ASTM D7624 >20	12.8	8.4	8.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	16.4	20.9	20.7

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.0	16.4	15.9
Base Number (BN)	mg KOH/g	ASTM D2896	7.92	8.04	8.27









OIL ANALYSIS REPORT

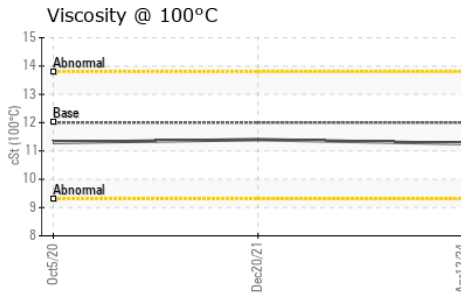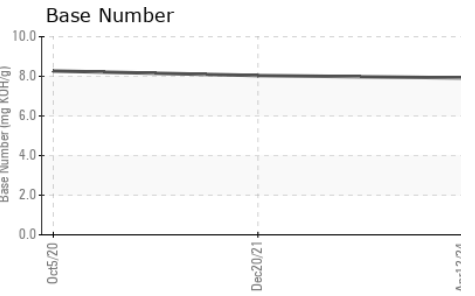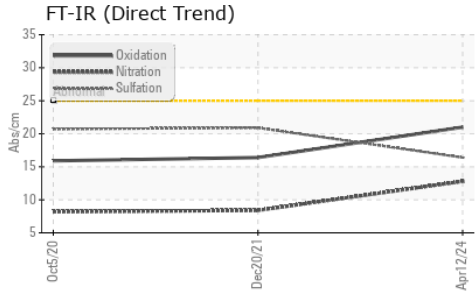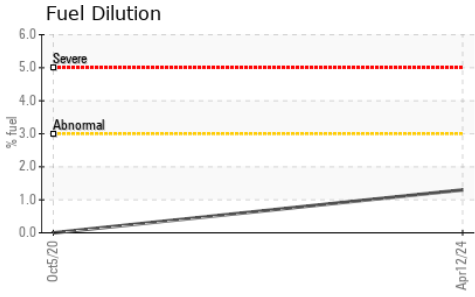

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	11.26	11.4	11.3

GRAPHS

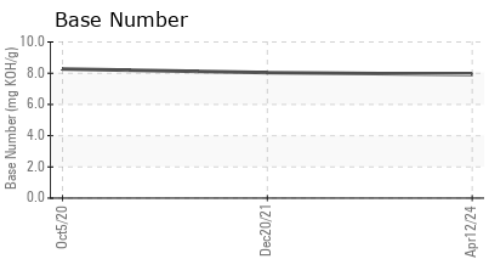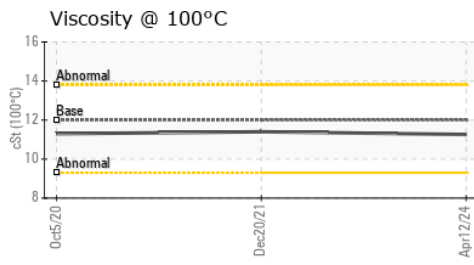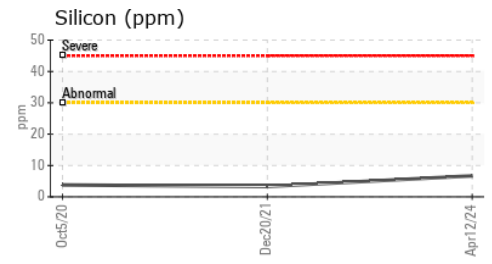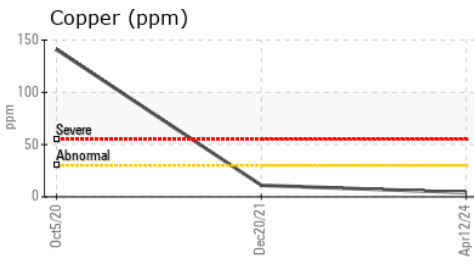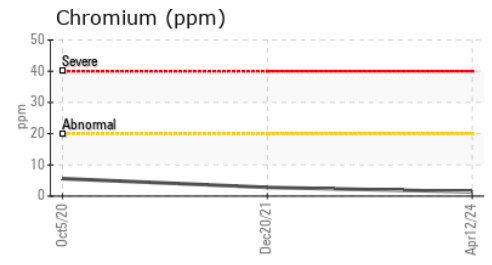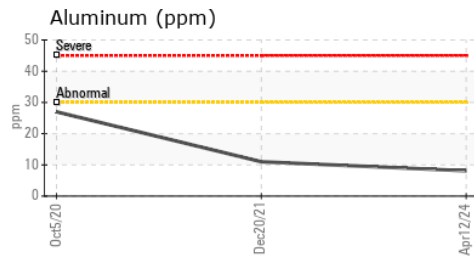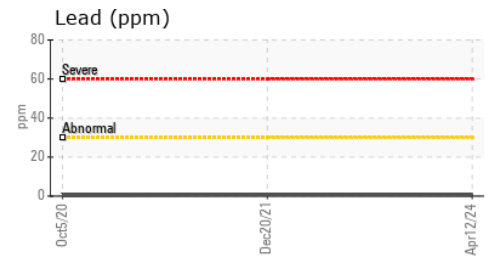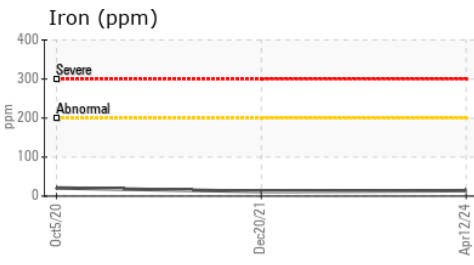

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0104521
Lab Number : 06150617
Unique Number : 10980695
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

Received : 16 Apr 2024
Tested : 22 Apr 2024
Diagnosed : 23 Apr 2024 - Wes Davis

PORTSIDE TRUCK AND AUTO - DIVERSIFIED AUTO
 100 TERMINAL ST
 CHARLESTOWN, MA
 US 02129

Contact: BRYAN WINTER
 BWINTERS@DIVERSIFIEDAUTO.COM
 T: 1(857)998-2229

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)