


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

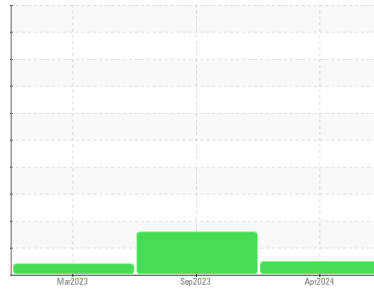

Machine Id
DT818
Component
Front Differential
Fluid
PETRO CANADA TRAXON SYNTHETIC 75W90 (4 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0113237	PCA0103266	PCA0091247
Sample Date	Client Info			11 Apr 2024	13 Sep 2023	17 Mar 2023
Machine Age	mls	Client Info		78834	61659	26287
Oil Age	mls	Client Info		61659	26287	26287
Oil Changed	Client Info			Changed	N/A	Not Changd
Sample Status				NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	NEG	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>1200	200	244	160
Chromium	ppm	ASTM D5185m	>8	1	2	<1
Nickel	ppm	ASTM D5185m	>20	10	10	7
Titanium	ppm	ASTM D5185m	>4	<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	3	6	2
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	1	1	<1
Tin	ppm	ASTM D5185m	>5	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	328	162	161	164
Barium	ppm	ASTM D5185m	1	1	0	0
Molybdenum	ppm	ASTM D5185m		2	2	1
Manganese	ppm	ASTM D5185m		3	4	3
Magnesium	ppm	ASTM D5185m	1	13	16	17
Calcium	ppm	ASTM D5185m	7	68	65	61
Phosphorus	ppm	ASTM D5185m	1145	1159	1109	1073
Zinc	ppm	ASTM D5185m	3	34	23	29
Sulfur	ppm	ASTM D5185m	17909	30126	29407	25056

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>230	156	▲ 328	280
Sodium	ppm	ASTM D5185m		1	4	2
Potassium	ppm	ASTM D5185m	>20	0	3	1

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

OIL ANALYSIS REPORT

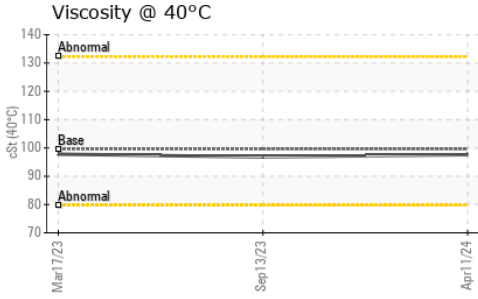




FLUID PROPERTIES		method	limit/base	current	history1	history2
------------------	--	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	99.6	97.6	96.8	97.8
-------------	-----	-----------	------	-------------	------	------

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color					no image	no image	no image
Bottom					no image	no image	no image

GRAPHS

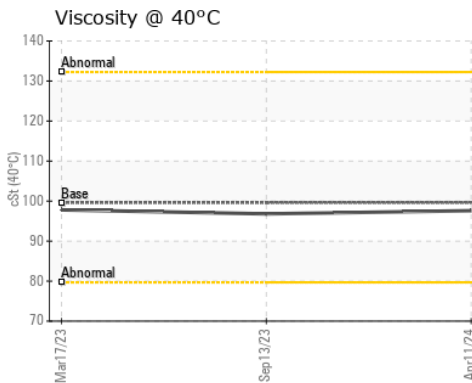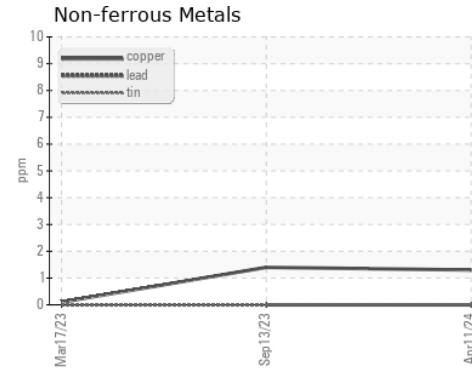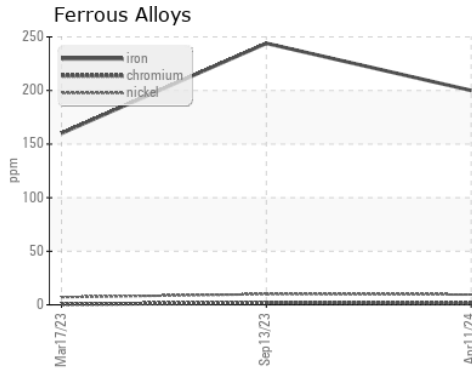

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113237
Lab Number : 06150717
Unique Number : 10980795
Test Package : FLEET

Received : 16 Apr 2024
Tested : 17 Apr 2024
Diagnosed : 17 Apr 2024 - Wes Davis

NW WHITE & CO - ANDERSON DIVISION
 2605 RIVER RD
 PIEDMONT, SC
 US 29673

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: James Threatt
 jthreatt@nwwhite.com
 T: (864)918-4646

F: