




# OIL ANALYSIS REPORT

Area  
**(13J6UU)**  
 Machine Id  
**913036**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON UHP 5W30 (--- GAL)**

## Sample Rating Trend

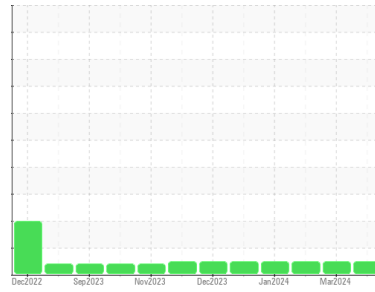

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0114141</b>	GFL0114124	GFL0108033
Sample Date	Client Info		<b>07 Mar 2024</b>	05 Mar 2024	16 Feb 2024
Machine Age	hrs	Client Info	<b>4067</b>	4045	3908
Oil Age	hrs	Client Info	<b>1651</b>	2416	2446
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>14</b>	15	11
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>2</b>	2	2
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	3
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>5</b>	5	4
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>20</b>	20	24
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 64	<b>57</b>	58	52
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1160	<b>1077</b>	1171	1140
Calcium	ppm	ASTM D5185m 820	<b>830</b>	874	834
Phosphorus	ppm	ASTM D5185m 1160	<b>994</b>	1059	966
Zinc	ppm	ASTM D5185m 1260	<b>1221</b>	1301	1244
Sulfur	ppm	ASTM D5185m 3000	<b>3471</b>	3749	3276

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	7	7
Sodium	ppm	ASTM D5185m	<b>9</b>	6	6
Potassium	ppm	ASTM D5185m >20	<b>26</b>	5	8

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.5</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.7</b>	10.4	10.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.2</b>	21.7	20.9


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.8</b>	20.5	19.4
Base Number (BN)	mg KOH/g	ASTM D2896 11.0	<b>6.7</b>	6.8	7.5




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

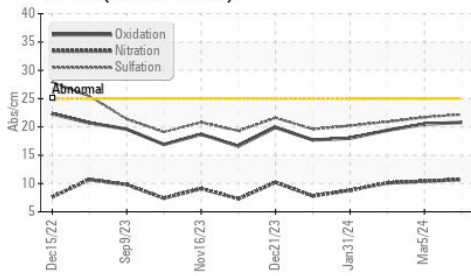

Base Number

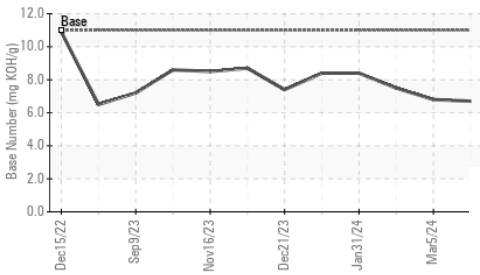

Viscosity @ 100°C

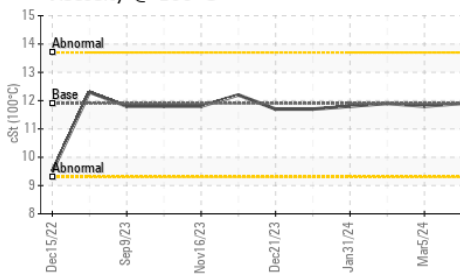


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	11.8	11.9

## GRAPHS


Ferrous Alloys

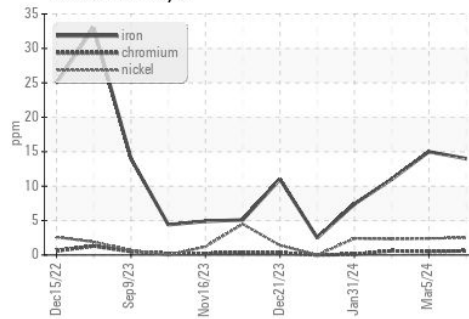


Non-ferrous Metals

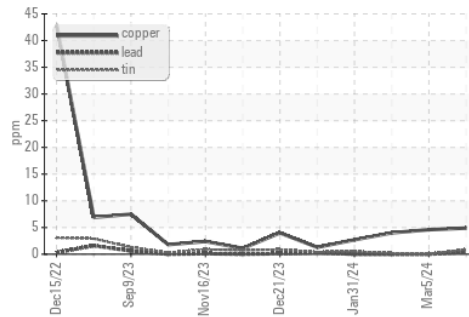

Viscosity @ 100°C

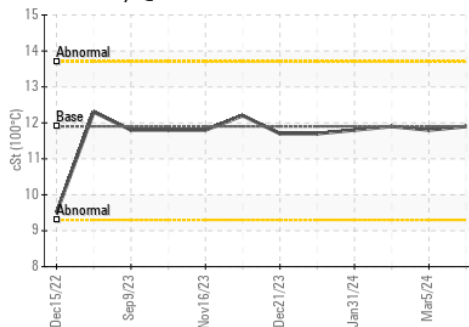

Base Number

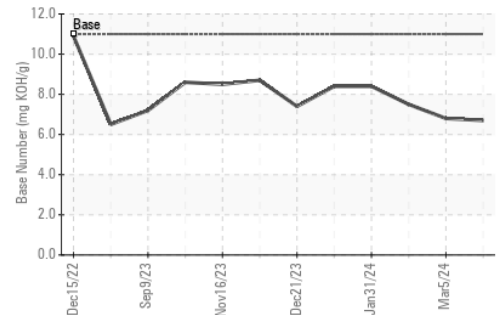

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0114141  
**Lab Number** : 06150926  
**Unique Number** : 10981004  
**Test Package** : FLEET

**Received** : 16 Apr 2024  
**Tested** : 17 Apr 2024  
**Diagnosed** : 18 Apr 2024 - Wes Davis

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Loyce Stewart  
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)