




# OIL ANALYSIS REPORT

Area  
**(41KM9B)**  
 Machine Id  
**834015**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

### Sample Rating Trend

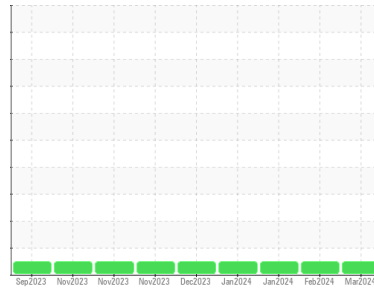

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0114154</b>  | GFL0108064  | GFL0108105  |
| Sample Date   | Client Info |             | <b>18 Mar 2024</b> | 21 Feb 2024 | 30 Jan 2024 |
| Machine Age   | hrs         | Client Info | <b>1172</b>        | 1029        | 882         |
| Oil Age       | hrs         | Client Info | <b>1029</b>        | 1029        | 0           |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | Not Chngd   | N/A         |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base      | current      | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >50 | <b>74</b>    | 72       | 73       |
| Chromium | ppm    | ASTM D5185m >4  | <b>2</b>     | 2        | 1        |
| Nickel   | ppm    | ASTM D5185m >2  | <b>2</b>     | 2        | 3        |
| Titanium | ppm    | ASTM D5185m     | <b>&lt;1</b> | 0        | <1       |
| Silver   | ppm    | ASTM D5185m >3  | <b>&lt;1</b> | <1       | <1       |
| Aluminum | ppm    | ASTM D5185m >9  | <b>10</b>    | 9        | 8        |
| Lead     | ppm    | ASTM D5185m >30 | <b>6</b>     | 5        | 6        |
| Copper   | ppm    | ASTM D5185m >35 | <b>19</b>    | 20       | 24       |
| Tin      | ppm    | ASTM D5185m >4  | <b>3</b>     | 3        | 4        |
| Vanadium | ppm    | ASTM D5185m     | <b>&lt;1</b> | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m     | <b>0</b>     | 0        | <1       |

## ADDITIVES

|            | method | limit/base       | current     | history1 | history2 |
|------------|--------|------------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 50   | <b>3</b>    | 9        | 3        |
| Barium     | ppm    | ASTM D5185m 5    | <b>3</b>    | 0        | 18       |
| Molybdenum | ppm    | ASTM D5185m 50   | <b>60</b>   | 66       | 62       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>11</b>   | 12       | 13       |
| Magnesium  | ppm    | ASTM D5185m 560  | <b>807</b>  | 887      | 832      |
| Calcium    | ppm    | ASTM D5185m 1510 | <b>1400</b> | 1486     | 1283     |
| Phosphorus | ppm    | ASTM D5185m 780  | <b>776</b>  | 861      | 768      |
| Zinc       | ppm    | ASTM D5185m 870  | <b>933</b>  | 1073     | 968      |
| Sulfur     | ppm    | ASTM D5185m 2040 | <b>2512</b> | 2498     | 2566     |

## CONTAMINANTS

|           | method | limit/base        | current   | history1 | history2 |
|-----------|--------|-------------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >+100 | <b>25</b> | 30       | 32       |
| Sodium    | ppm    | ASTM D5185m       | <b>10</b> | 8        | 2        |
| Potassium | ppm    | ASTM D5185m >20   | <b>33</b> | 5        | 7        |

## INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844     | <b>0</b>    | 0        | 0        |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>14.1</b> | 13.6     | 13.8     |
| Sulfation | Abs./1mm | *ASTM D7415 >30 | <b>27.4</b> | 25.8     | 26.3     |


## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs./1mm | *ASTM D7414 >25 | <b>26.1</b> | 24.0     | 25.0     |
| Base Number (BN) | mg KOH/g | ASTM D2896 10.2 | <b>3.1</b>  | 3.9      | 2.9      |




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

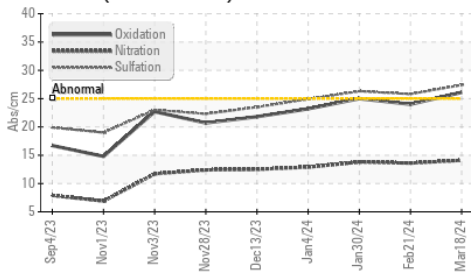

Base Number

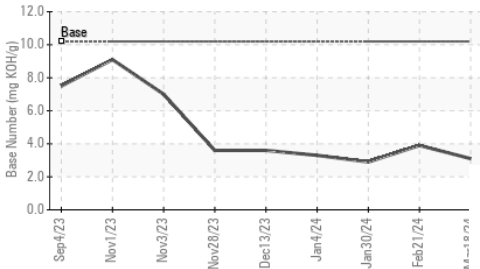

Viscosity @ 100°C

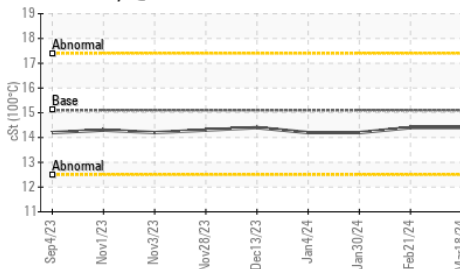

## VISUAL


|                  | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.1    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

## FLUID PROPERTIES


|              | method | limit/base | current | history1 | history2 |
|--------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt    | ASTM D445  | 15.1    | 14.4     | 14.2     |

## GRAPHS


Ferrous Alloys

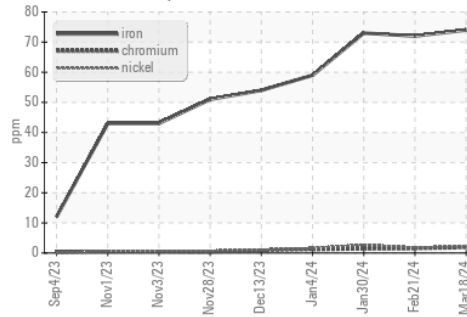


Non-ferrous Metals

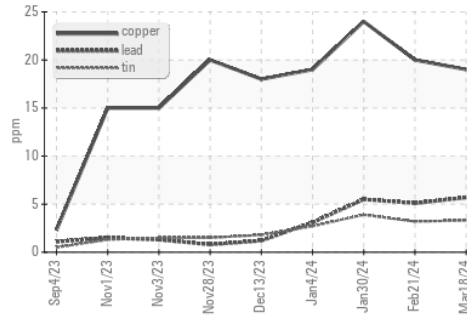

Viscosity @ 100°C

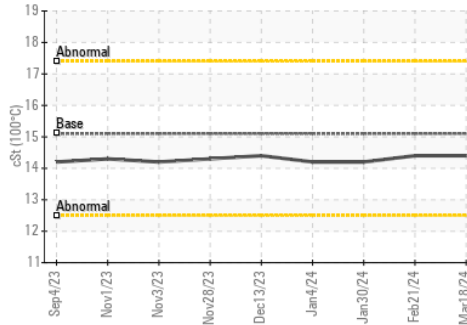

Base Number

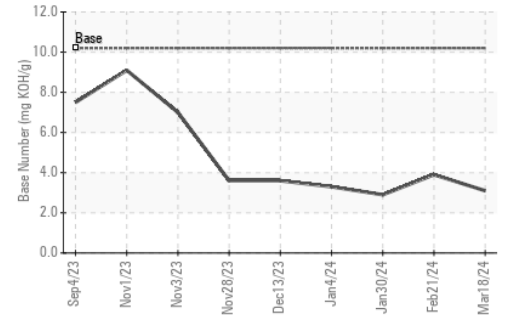

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0114154  
**Lab Number** : 06150948  
**Unique Number** : 10981026  
**Test Package** : FLEET

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Loyce Stewart  
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: