




# OIL ANALYSIS REPORT

Area  
**(62A0YH1) TALLASSEE**  
 Machine Id  
**920055-102722**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- LTR)**

### Sample Rating Trend

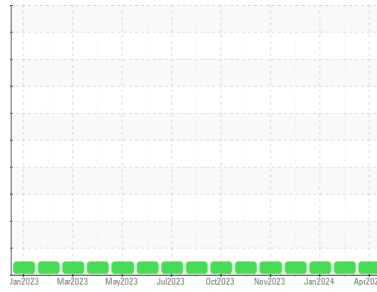

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0080701</b>	GFL0081851	GFL0079722
Sample Date	Client Info		<b>11 Apr 2024</b>	01 Apr 2024	24 Jan 2024
Machine Age	hrs	Client Info	<b>9686</b>	9611	9081
Oil Age	hrs	Client Info	<b>9686</b>	9611	9081
Oil Changed		Client Info	<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>2</b>	8	2
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	1
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	3	0
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>11</b>	11	10
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>59</b>	63	56
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>935</b>	929	927
Calcium	ppm	ASTM D5185m	<b>1077</b>	1071	973
Phosphorus	ppm	ASTM D5185m	<b>1003</b>	974	1017
Zinc	ppm	ASTM D5185m	<b>1224</b>	1185	1241
Sulfur	ppm	ASTM D5185m	<b>3604</b>	2930	3154

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>2</b>	5	4
Sodium	ppm	ASTM D5185m	<b>3</b>	3	2
Potassium	ppm	ASTM D5185m >20	<b>10</b>	0	3

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	0.5	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.5</b>	8.5	6.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.1</b>	20.0	18.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.0</b>	15.6	13.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>8.5</b>	7.1	8.4







# OIL ANALYSIS REPORT

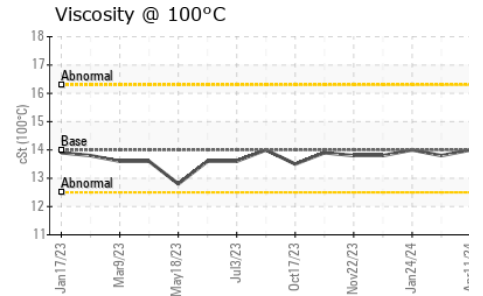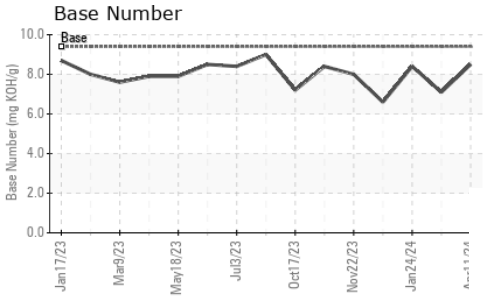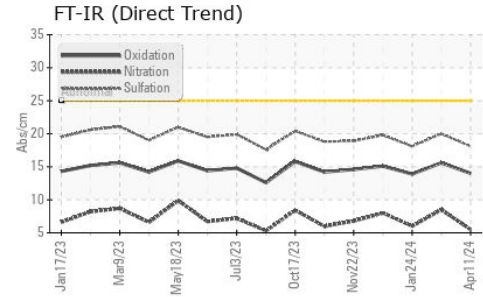

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	<b>14.0</b>	13.8	14.0

## GRAPHS

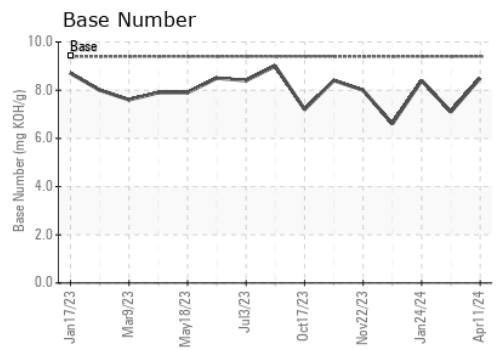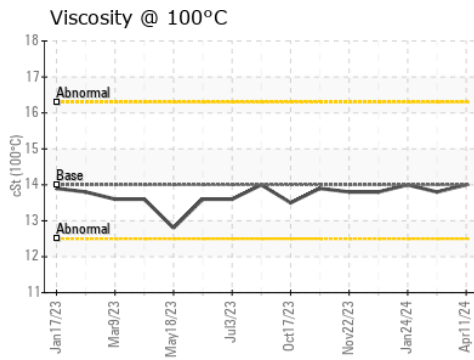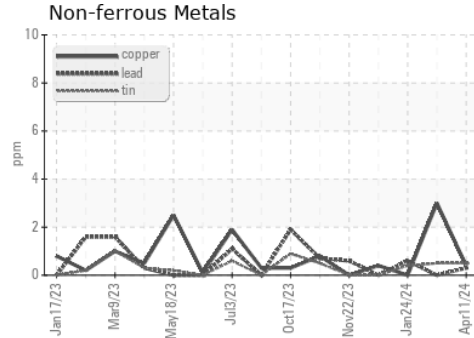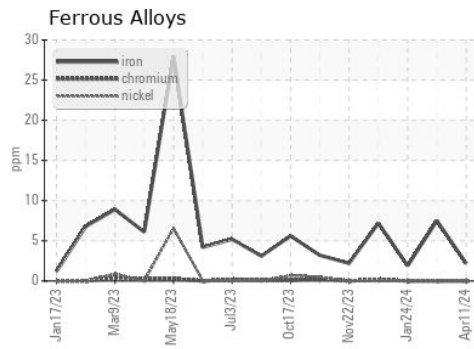

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0080701      **Received** : 16 Apr 2024  
**Lab Number** : **06150984**      **Tested** : 17 Apr 2024  
**Unique Number** : 10981062      **Diagnosed** : 19 Apr 2024 - Don Baldrige  
**Test Package** : FLEET

GFL Environmental - 172 - Montgomery-Alexander City-Tallahassee  
 Multiple Sites  
 Montgomery, AL  
 US 36108  
 Contact: RICHARD HATFIELD  
 rhatfield@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)