




# OIL ANALYSIS REPORT

Sample Rating Trend

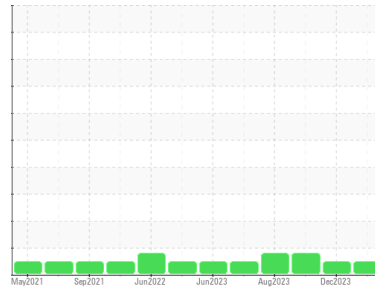

**NORMAL**



Area  
**(GEE481)**  
 Machine Id  
**945006-260238**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0111509</b>	GFL0083085	GFL0083093
Sample Date	Client Info	<b>12 Apr 2024</b>	27 Dec 2023	24 Nov 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	Changed	N/A
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	<b>5</b>	18	▲ 50
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	1	3
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>1</b>	5	5
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	2
Copper	ppm	ASTM D5185m	>35	<b>0</b>	15	2
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	50	<b>32</b>	20	10
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>51</b>	53	64
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	560	<b>560</b>	561	708
Calcium	ppm	ASTM D5185m	1510	<b>1437</b>	1419	1857
Phosphorus	ppm	ASTM D5185m	780	<b>714</b>	711	896
Zinc	ppm	ASTM D5185m	870	<b>867</b>	910	1134
Sulfur	ppm	ASTM D5185m	2040	<b>2608</b>	2452	2516

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>+100	<b>5</b>	5	6
Sodium	ppm	ASTM D5185m		<b>3</b>	11	7
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	3	0

## INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844		<b>0.1</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.0</b>	9.2	12.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	20.5	24.5


## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.9</b>	16.3	20.6
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	<b>7.0</b>	5.4	3.8




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

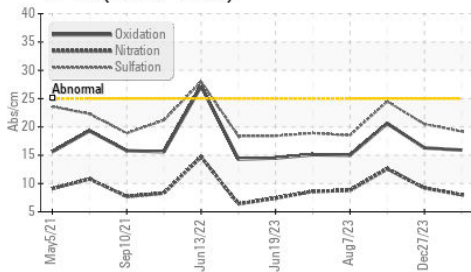

Base Number

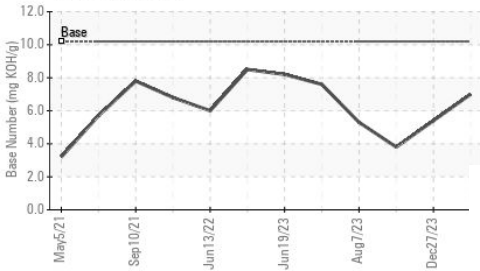

Viscosity @ 100°C

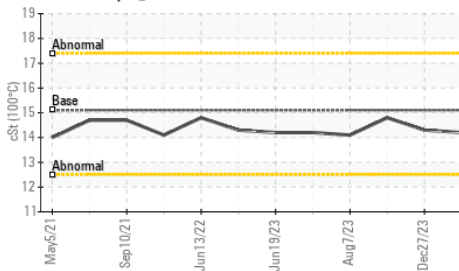


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.2	14.3

## GRAPHS


Ferrous Alloys

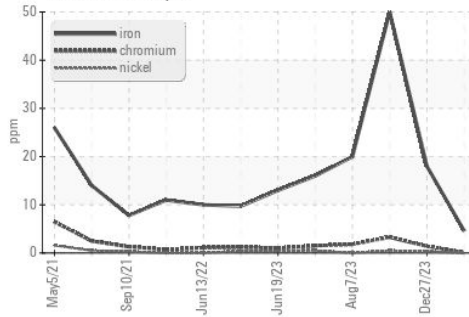


Non-ferrous Metals

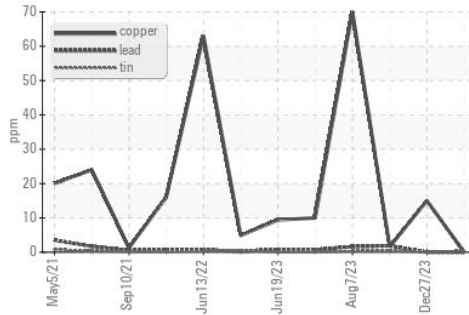

Viscosity @ 100°C

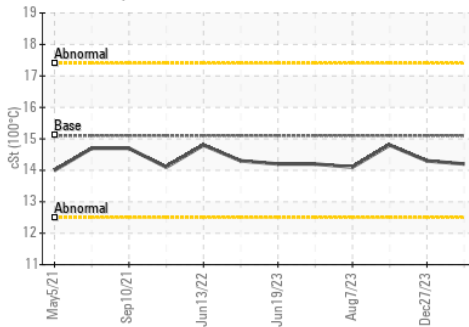

Base Number

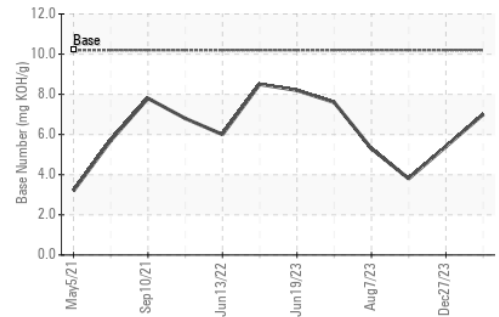

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0111509  
**Lab Number** : 06151488  
**Unique Number** : 10981566  
**Test Package** : FLEET

**GFL Environmental - 074 - Douglas - Transwaste**  
 1219 Landfill Road  
 Douglas, GA  
 US 31533

Contact: CURTIS JACOBS  
 CURTIS.JACOBS@GFLENV.COM  
 T: (912)384-6001

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)