




# OIL ANALYSIS REPORT

Sample Rating Trend

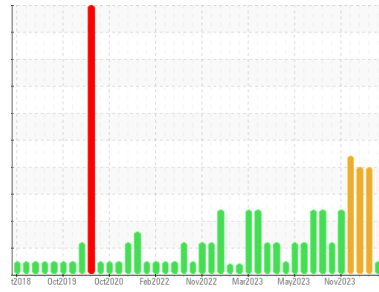

**NORMAL**



Machine Id  
**10858**  
 Component  
**Diesel Engine**  
 Fluid

**PETRO CANADA DURON SHP 15W40 (29 GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>GFL0115666</b>  | GFL0107255  | GFL0107248  |
| Sample Date        | Client Info |             |            | <b>16 Apr 2024</b> | 02 Jan 2024 | 19 Dec 2023 |
| Machine Age        | hrs         | Client Info |            | <b>1617</b>        | 1607        | 1687        |
| Oil Age            | hrs         | Client Info |            | <b>155</b>         | 155         | 235         |
| Oil Changed        | Client Info |             |            | <b>Changed</b>     | Not Changd  | Not Changd  |
| Sample Status      |             |             |            | <b>NORMAL</b>      | ABNORMAL    | ABNORMAL    |

| CONTAMINATION |           | method | limit/base | current    | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water         | WC Method |        | >0.2       | <b>NEG</b> | NEG      | NEG      |
| Glycol        | WC Method |        |            | <b>NEG</b> | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >75        | <b>8</b>     | ▲ 86     | ▲ 178    |
| Chromium    | ppm | ASTM D5185m | >5         | <b>&lt;1</b> | <1       | <1       |
| Nickel      | ppm | ASTM D5185m | >4         | <b>0</b>     | 0        | 0        |
| Titanium    | ppm | ASTM D5185m | >2         | <b>0</b>     | 0        | <1       |
| Silver      | ppm | ASTM D5185m | >2         | <b>0</b>     | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >15        | <b>2</b>     | ▲ 36     | ▲ 44     |
| Lead        | ppm | ASTM D5185m | >25        | <b>0</b>     | 0        | 0        |
| Copper      | ppm | ASTM D5185m | >100       | <b>&lt;1</b> | 29       | 37       |
| Tin         | ppm | ASTM D5185m | >4         | <b>&lt;1</b> | 8        | 10       |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>     | <1       | <1       |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |

| ADDITIVES  |     | method      | limit/base | current     | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 0          | <b>49</b>   | 12       | 9        |
| Barium     | ppm | ASTM D5185m | 0          | <b>0</b>    | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m | 60         | <b>49</b>   | 59       | 59       |
| Manganese  | ppm | ASTM D5185m | 0          | <b>2</b>    | 3        | 4        |
| Magnesium  | ppm | ASTM D5185m | 1010       | <b>721</b>  | 830      | 812      |
| Calcium    | ppm | ASTM D5185m | 1070       | <b>1141</b> | 940      | 948      |
| Phosphorus | ppm | ASTM D5185m | 1150       | <b>684</b>  | 934      | 909      |
| Zinc       | ppm | ASTM D5185m | 1270       | <b>812</b>  | 1053     | 1054     |
| Sulfur     | ppm | ASTM D5185m | 2060       | <b>2455</b> | 2649     | 2782     |





| CONTAMINANTS |     | method      | limit/base | current    | history1 | history2 |
|--------------|-----|-------------|------------|------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>12</b>  | 10       | 11       |
| Sodium       | ppm | ASTM D5185m |            | <b>4</b>   | ● 167    | ● 177    |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b>   | 14       | 16       |
| Fuel         | %   | ASTM D3524  | >3.0       | <b>0.7</b> | ▲ 3.1    | ▲ 3.2    |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >6         | <b>0.2</b>  | 0.1      | 0.1      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>6.5</b>  | 5.6      | 5.5      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>20.4</b> | 16.7     | 17.0     |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>16.6</b> | 12.4     | 12.2     |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 9.8        | <b>9.8</b>  | 8.4      | 8.4      |







# OIL ANALYSIS REPORT

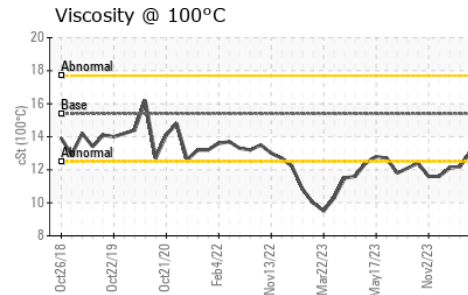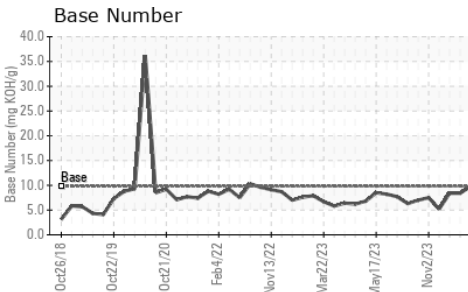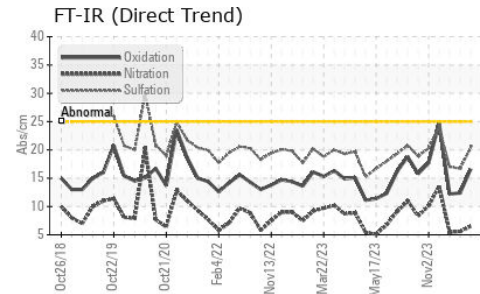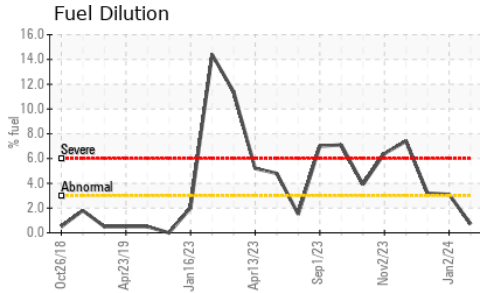

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2      |
|------------------|--------|------------|---------|----------|---------------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 13.1     | ▲ 12.2 ▲ 12.1 |

## GRAPHS

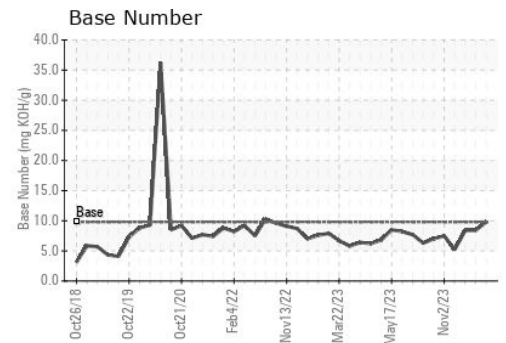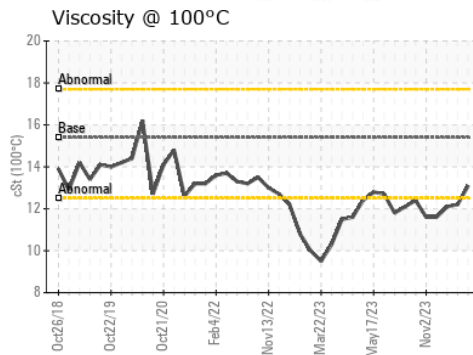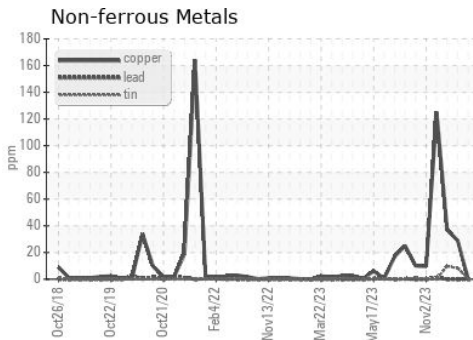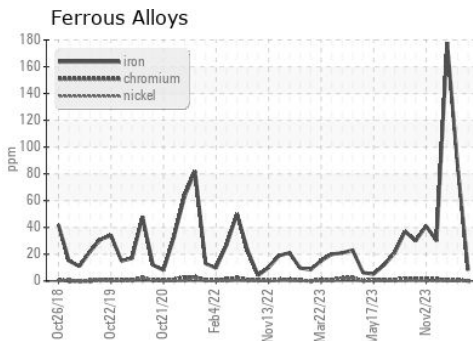

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115666 **Received** : 17 Apr 2024  
**Lab Number** : 06151493 **Tested** : 22 Apr 2024  
**Unique Number** : 10981571 **Diagnosed** : 22 Apr 2024 - Sean Felton  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: