




# OIL ANALYSIS REPORT

Sample Rating Trend

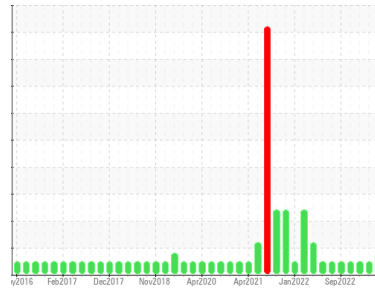

**WEAR**



Machine Id  
**10501C AUTOCAR ACX**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (28 QTS)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: This vehicle was requested for a re-sample. )

### Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core).

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0117443</b>	GFL0089272	GFL0087138
Sample Date	Client Info			<b>15 Apr 2024</b>	06 Sep 2023	17 Jul 2023
Machine Age	hrs	Client Info		<b>4219</b>	24111	23775
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Changed	N/A
Sample Status				<b>ABNORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>21</b>	20	18
Chromium	ppm	ASTM D5185m	>4	<b>3</b>	2	2
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>30	<b>2</b>	2	2
Copper	ppm	ASTM D5185m	>35	<b>▲ 143</b>	2	<1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	<b>8</b>	7	23
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>54</b>	52	54
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	560	<b>576</b>	587	591
Calcium	ppm	ASTM D5185m	1510	<b>1648</b>	1671	1741
Phosphorus	ppm	ASTM D5185m	780	<b>727</b>	728	764
Zinc	ppm	ASTM D5185m	870	<b>960</b>	1001	998
Sulfur	ppm	ASTM D5185m	2040	<b>2566</b>	2897	2964

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+100	<b>8</b>	5	6
Sodium	ppm	ASTM D5185m		<b>15</b>	11	9
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	2	3


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0</b>	0	0
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.9</b>	11.3	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.4</b>	24.0	20.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.1</b>	20.8	17.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	<b>3.4</b>	3.6	5.8




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

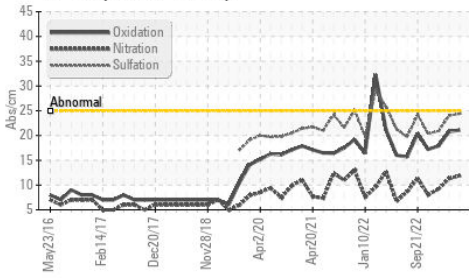


Glycol Contamination

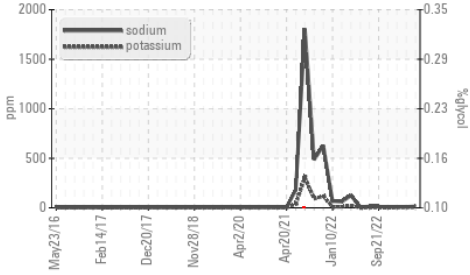


Base Number

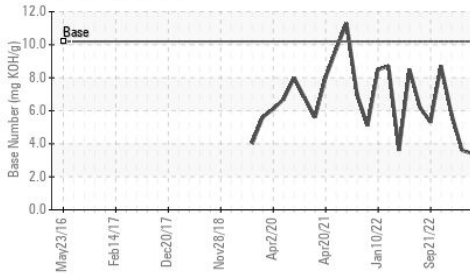

Viscosity @ 100°C

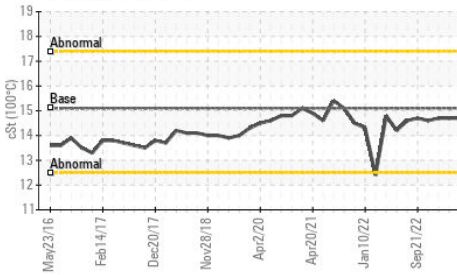

Glycol Contamination

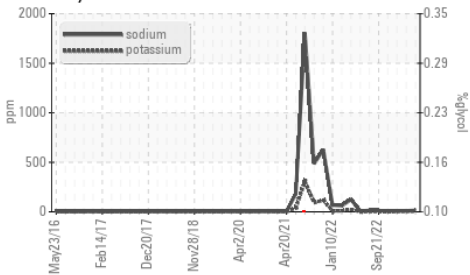


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.7	14.7

## GRAPHS


Ferrous Alloys

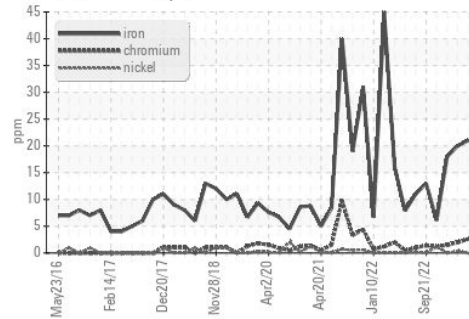


Non-ferrous Metals

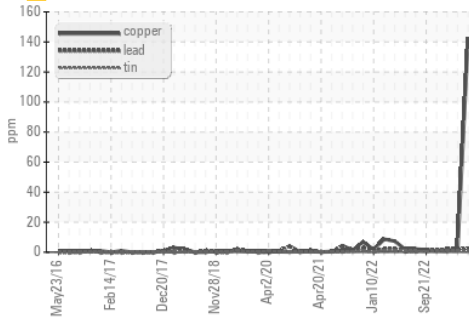

Viscosity @ 100°C

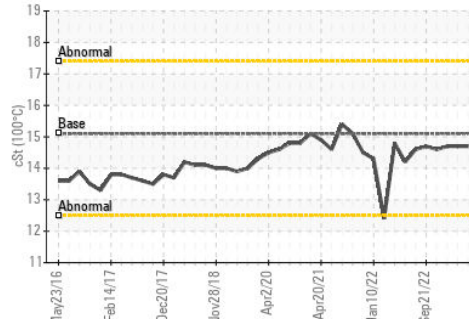

Base Number

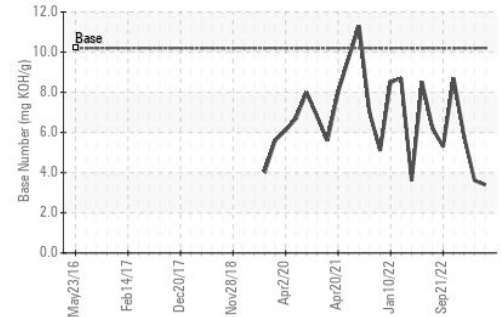

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0117443

Lab Number : 06151693

Unique Number : 10981771

Test Package : FLEET ( Additional Tests: Glycol )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 17 Apr 2024

Tested : 22 Apr 2024

Diagnosed : 22 Apr 2024 - Jonathan Hester

GFL Environmental - 001 - Raleigh(CNG)

3741 Conquest Drive

Garner, NC

US 27529

Contact: Craig Johnson

craig.johnson@gflenv.com

T: (919)662-7100

F: (919)662-7130