




# OIL ANALYSIS REPORT

Sample Rating Trend

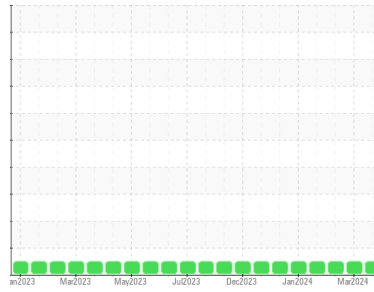

**NORMAL**



Area  
**(DUW947)**  
 Machine Id  
**10629**  
 Component  
**Transmission (Auto)**  
 Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0115670</b>	GFL0115733	GFL0112373
Sample Date	Client Info	<b>16 Apr 2024</b>	28 Mar 2024	22 Feb 2024
Machine Age	hrs	Client Info	1273	1015
Oil Age	hrs	Client Info	258	1112
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >160	<b>40</b>	35	40
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >5	<b>1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >50	<b>5</b>	4	5
Lead	ppm	ASTM D5185m >50	<b>2</b>	0	1
Copper	ppm	ASTM D5185m >225	<b>4</b>	5	4
Tin	ppm	ASTM D5185m >10	<b>2</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>83</b>	66	80
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>2</b>	0	0
Manganese	ppm	ASTM D5185m	<b>1</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>2</b>	0	<1
Calcium	ppm	ASTM D5185m	<b>128</b>	163	123
Phosphorus	ppm	ASTM D5185m	<b>238</b>	213	199
Zinc	ppm	ASTM D5185m	<b>5</b>	18	0
Sulfur	ppm	ASTM D5185m	<b>1951</b>	2070	1454

## CONTAMINANTS


method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >20	<b>6</b>	4	4
Sodium	ppm	ASTM D5185m	<b>2</b>	3	5
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	0

## VISUAL

method	limit/base	current	history1	history2	
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT

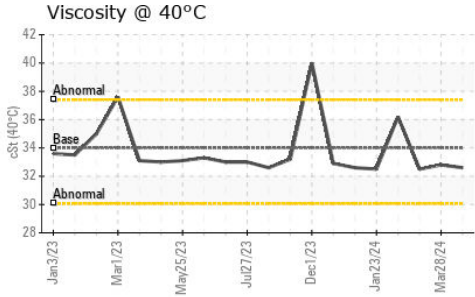




## FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 34	<b>32.6</b>	32.8	32.5

## SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

## GRAPHS

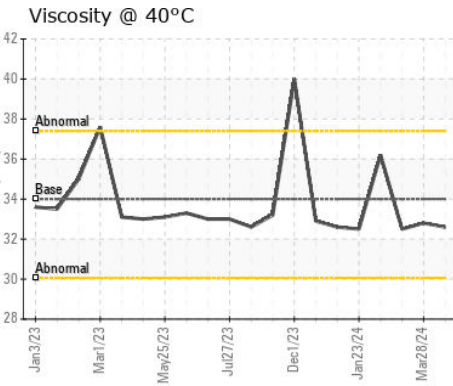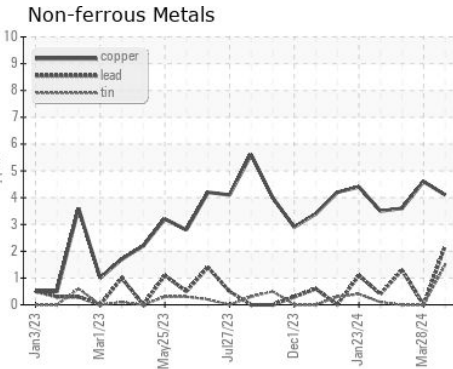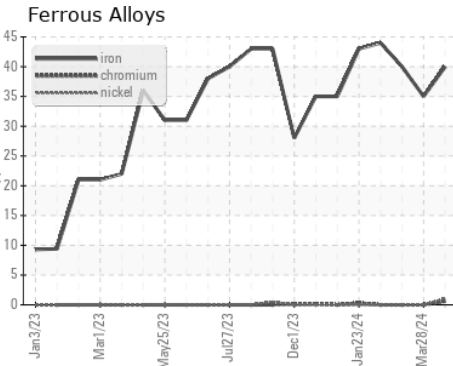

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115670  
**Lab Number** : **06152414**  
**Unique Number** : 10982492  
**Test Package** : FLEET

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: