




# OIL ANALYSIS REPORT

## Sample Rating Trend

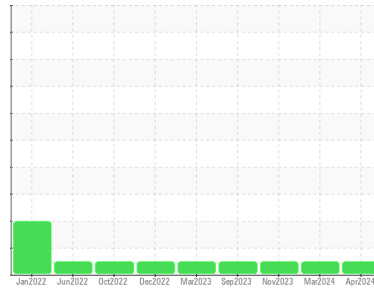

**NORMAL**



Machine Id  
**926030**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0116132</b>	GFL0116160	GFL0092619
Sample Date	Client Info		<b>12 Apr 2024</b>	20 Mar 2024	29 Nov 2023
Machine Age	hrs	Client Info	<b>21483</b>	21324	20784
Oil Age	hrs	Client Info	<b>159</b>	571	569
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>4</b>	9	8
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >5	<b>1</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	7	4
Lead	ppm	ASTM D5185m >40	<b>2</b>	2	1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	2	2
Tin	ppm	ASTM D5185m >15	<b>1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>1</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	64	58
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>970</b>	985	892
Calcium	ppm	ASTM D5185m 1070	<b>1072</b>	1201	1011
Phosphorus	ppm	ASTM D5185m 1150	<b>1164</b>	1126	1012
Zinc	ppm	ASTM D5185m 1270	<b>1270</b>	1312	1156
Sulfur	ppm	ASTM D5185m 2060	<b>3751</b>	3376	2910

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	4
Sodium	ppm	ASTM D5185m	<b>3</b>	<1	2
Potassium	ppm	ASTM D5185m >20	<b>3</b>	18	9

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.1</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.4</b>	8.5	8.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.0</b>	19.5	19.9


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.1</b>	16.5	16.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.9</b>	7.1	7.2




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

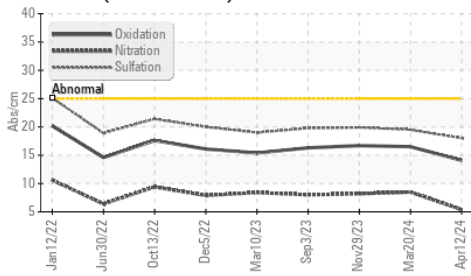

Base Number

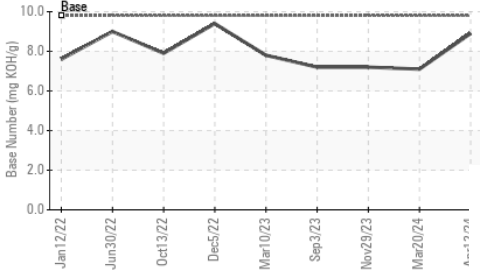

Viscosity @ 100°C

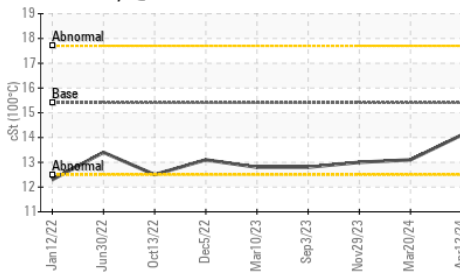


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	13.1

## GRAPHS


Ferrous Alloys

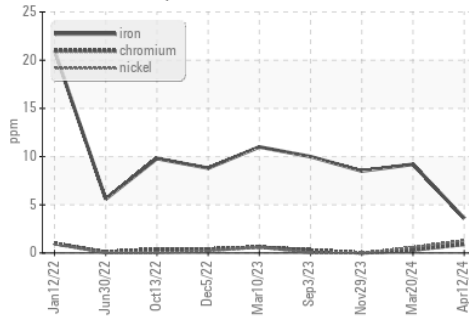


Non-ferrous Metals

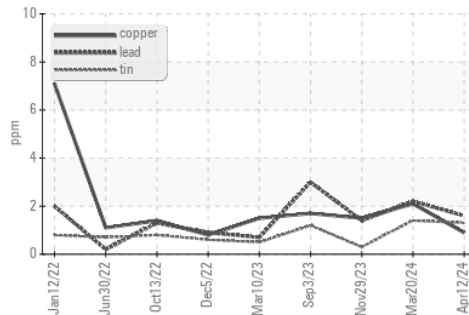

Viscosity @ 100°C

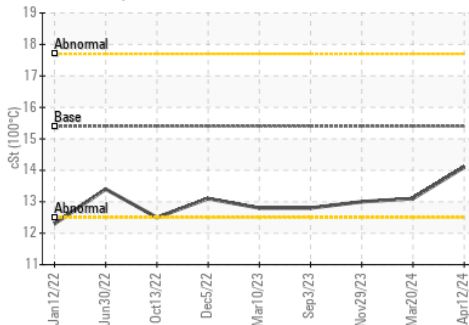

Base Number

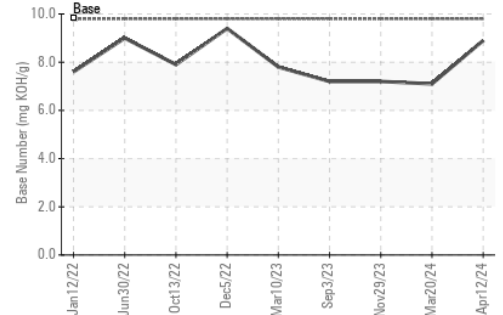

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0116132  
 Lab Number : 06152536  
 Unique Number : 10982614  
 Test Package : FLEET

GFL Environmental - 947 - WB Horicon HC  
 N7296 County Rd V  
 Horicon, WI  
 US 53032  
 Contact: Tim Kieffer  
 tim.kieffer@gflenv.com  
 T: (608)219-0288  
 F:

To discuss this sample report, CONTACT Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)