




# OIL ANALYSIS REPORT

Sample Rating Trend

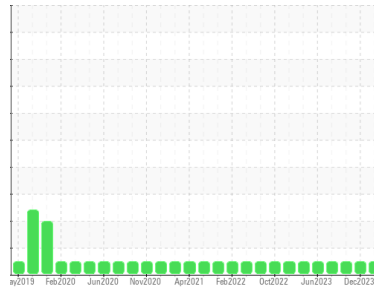

**NORMAL**



Area  
**(YA154647)**  
Machine Id  
**12007**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (8 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0111022</b>  | GFL0098519  | GFL0087758  |
| Sample Date   | Client Info |             | <b>16 Apr 2024</b> | 18 Dec 2023 | 28 Sep 2023 |
| Machine Age   | mls         | Client Info | <b>118185</b>      | 131669      | 16700       |
| Oil Age       | mls         | Client Info | <b>600</b>         | 609         | 47          |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >3.0       | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >90  | <b>7</b>     | 69       | 4        |
| Chromium | ppm    | ASTM D5185m >20  | <b>1</b>     | 3        | <1       |
| Nickel   | ppm    | ASTM D5185m >2   | <b>1</b>     | 0        | <1       |
| Titanium | ppm    | ASTM D5185m >2   | <b>&lt;1</b> | 0        | 0        |
| Silver   | ppm    | ASTM D5185m >2   | <b>&lt;1</b> | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >20  | <b>1</b>     | 54       | <1       |
| Lead     | ppm    | ASTM D5185m >40  | <b>1</b>     | 0        | 0        |
| Copper   | ppm    | ASTM D5185m >330 | <b>&lt;1</b> | 5        | <1       |
| Tin      | ppm    | ASTM D5185m >15  | <b>1</b>     | 0        | 0        |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m      | <b>1</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base       | current     | history1 | history2 |
|------------|--------|------------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>2</b>    | 80       | 0        |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>    | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m 60   | <b>61</b>   | 118      | 60       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>1</b>    | 2        | 0        |
| Magnesium  | ppm    | ASTM D5185m 1010 | <b>889</b>  | 683      | 950      |
| Calcium    | ppm    | ASTM D5185m 1070 | <b>1084</b> | 1644     | 1041     |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>1063</b> | 694      | 1056     |
| Zinc       | ppm    | ASTM D5185m 1270 | <b>1191</b> | 887      | 1266     |
| Sulfur     | ppm    | ASTM D5185m 2060 | <b>3324</b> | 2527     | 3321     |

## CONTAMINANTS

|           | method | limit/base      | current  | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>4</b> | 12       | 3        |
| Sodium    | ppm    | ASTM D5185m     | <b>4</b> | 2        | 2        |
| Potassium | ppm    | ASTM D5185m >20 | <b>1</b> | 141      | 1        |

## INFRA-RED




|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >6  | <b>0.3</b>  | 0.2      | 0.1      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>6.8</b>  | 6.1      | 5.4      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>18.4</b> | 17.9     | 17.6     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>14.3</b> | 14.0     | 13.6     |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8  | <b>8.1</b>  | 8.9      | 9.2      |







# OIL ANALYSIS REPORT

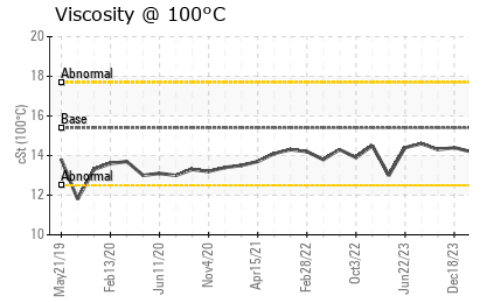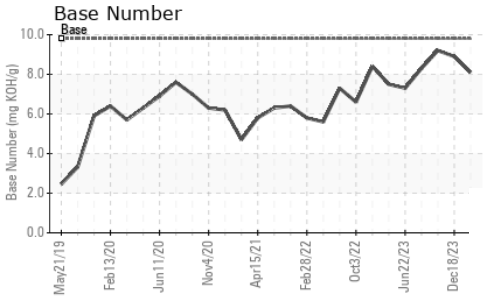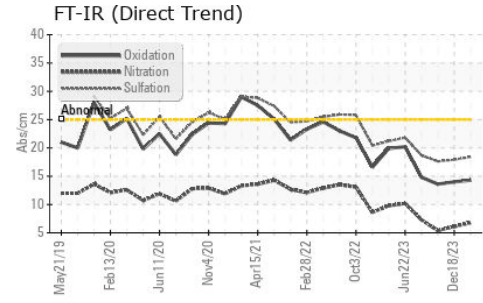

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 14.2     | 14.4     |

## GRAPHS

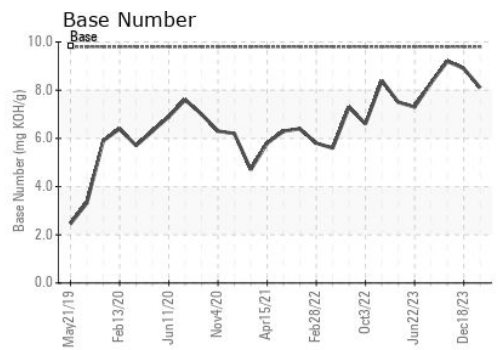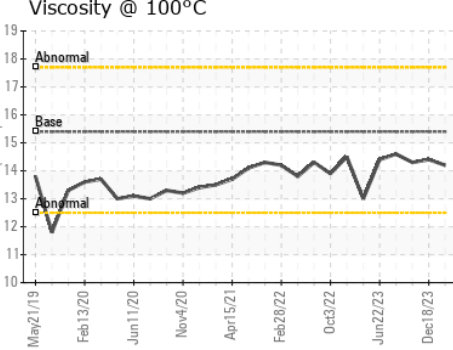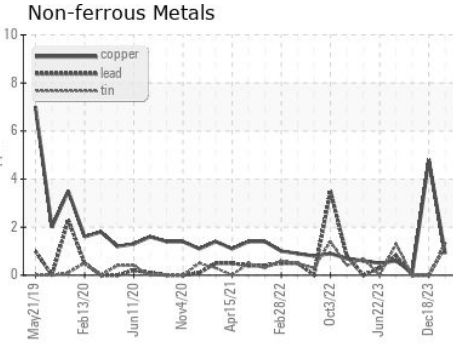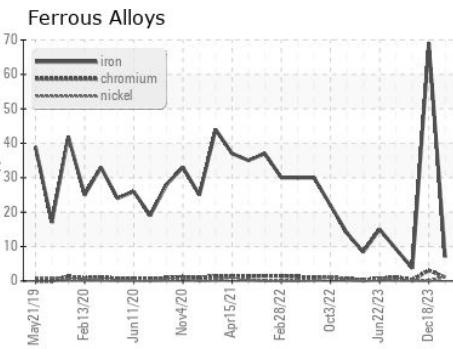

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0111022  
 Lab Number : 06152726  
 Unique Number : 10982804  
 Test Package : FLEET

Received : 18 Apr 2024  
 Tested : 18 Apr 2024  
 Diagnosed : 18 Apr 2024 - Wes Davis

GFL Environmental - 006 - Wilmington  
 3618 US Highway 421 N  
 Wilmington, NC  
 US 28401  
 Contact: Eric Wood  
 eric.wood@gflenv.com  
 T: (717)723-1956  
 F: (910)762-6880

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)