




# OIL ANALYSIS REPORT



Machine Id  
**413065**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### Sample Rating Trend

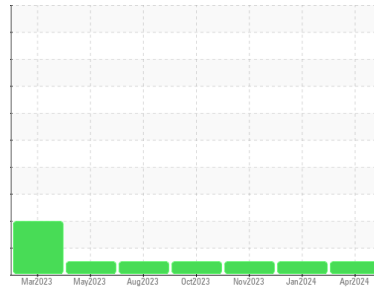

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0112034</b>	GFL0105480	GFL0094109
Sample Date	Client Info		<b>12 Apr 2024</b>	31 Jan 2024	01 Nov 2023
Machine Age	mls	Client Info	<b>49996</b>	41276	32468
Oil Age	mls	Client Info	<b>49996</b>	41276	32468
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>120	<b>7</b>	4	2
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>2</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	<1	2
Lead	ppm	ASTM D5185m	>40	<b>1</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>3</b>	3	5
Tin	ppm	ASTM D5185m	>15	<b>1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>1</b>	0	<1

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	5
Molybdenum	ppm	ASTM D5185m	60	<b>54</b>	55	49
Manganese	ppm	ASTM D5185m	0	<b>1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>6</b>	4	4
Calcium	ppm	ASTM D5185m	1070	<b>2565</b>	2487	2475
Phosphorus	ppm	ASTM D5185m	1150	<b>1219</b>	1120	1025
Zinc	ppm	ASTM D5185m	1270	<b>1276</b>	1299	1162
Sulfur	ppm	ASTM D5185m	2060	<b>3753</b>	3345	3006

### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	7	7
Sodium	ppm	ASTM D5185m		<b>2</b>	2	0
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	2	2

### INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>4	<b>0.2</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.3</b>	7.9	5.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.2</b>	19.9	14.9

### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>12.0</b>	11.6	8.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>6.2</b>	6.0	8.1







# OIL ANALYSIS REPORT

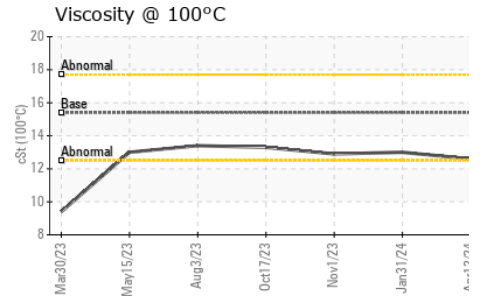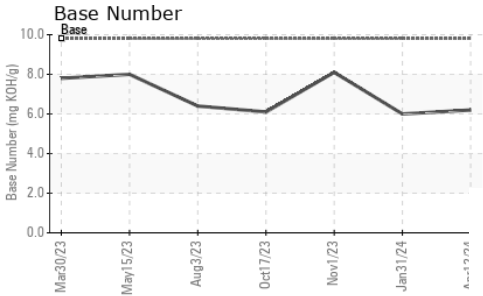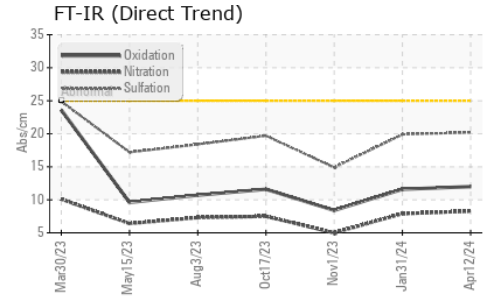

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.6</b>	13.0	12.9

## GRAPHS

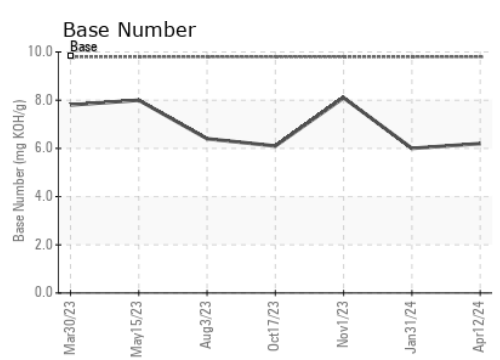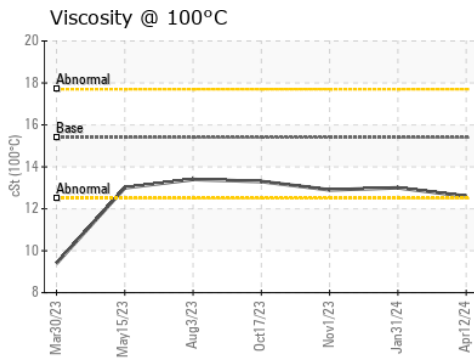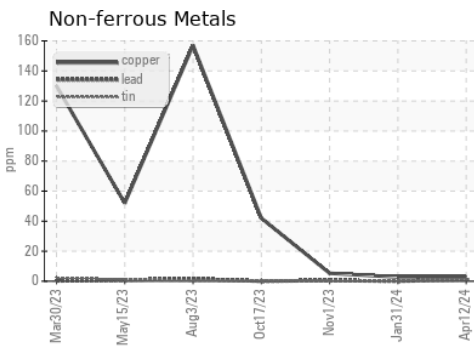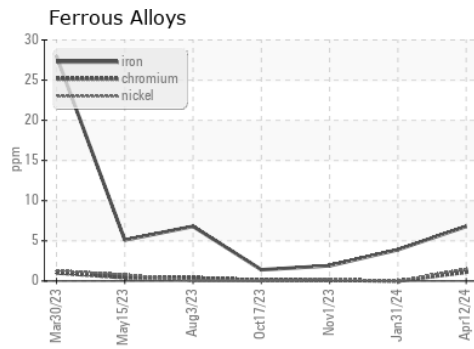

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0112034  
**Lab Number** : **06152759**  
**Unique Number** : 10982837  
**Test Package** : FLEET  
**Received** : 18 Apr 2024  
**Tested** : 18 Apr 2024  
**Diagnosed** : 22 Apr 2024 - Don Baldrige

**GFL Environmental - 983 - Sugar Land Hauling**  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498  
 Contact: Adrian Martinez  
 adrianmartinez@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)