




# OIL ANALYSIS REPORT

## Sample Rating Trend

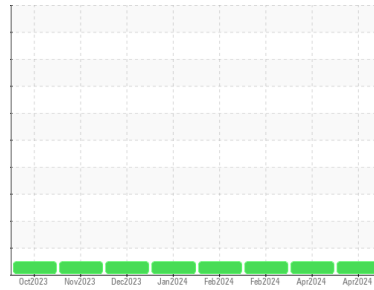

**NORMAL**



Machine Id

**814048**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0109427</b>	GFL0109246	GFL0109314
Sample Date	Client Info		<b>17 Apr 2024</b>	01 Apr 2024	27 Feb 2024
Machine Age	hrs	Client Info	<b>1568</b>	1437	1183
Oil Age	hrs	Client Info	<b>385</b>	170	536
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>14</b>	8	28
Chromium	ppm	ASTM D5185m >20	<b>1</b>	0	1
Nickel	ppm	ASTM D5185m >4	<b>1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>9</b>	8	23
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>9</b>	5	24
Lead	ppm	ASTM D5185m >40	<b>1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>2</b>	<1	4
Tin	ppm	ASTM D5185m >15	<b>1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>1</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>8</b>	9	41
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>55</b>	56	60
Manganese	ppm	ASTM D5185m 0	<b>1</b>	0	2
Magnesium	ppm	ASTM D5185m 1010	<b>889</b>	943	878
Calcium	ppm	ASTM D5185m 1070	<b>1136</b>	1200	1383
Phosphorus	ppm	ASTM D5185m 1150	<b>1112</b>	1057	1128
Zinc	ppm	ASTM D5185m 1270	<b>1233</b>	1309	1314
Sulfur	ppm	ASTM D5185m 2060	<b>3516</b>	3826	3368

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	2	8
Sodium	ppm	ASTM D5185m	<b>4</b>	3	2
Potassium	ppm	ASTM D5185m >20	<b>21</b>	10	59

### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.8</b>	6.8	8.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.0</b>	18.4	20.2


### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.3</b>	14.6	16.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.4</b>	8.8	7.0




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

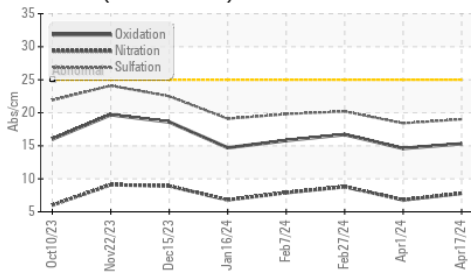

Base Number

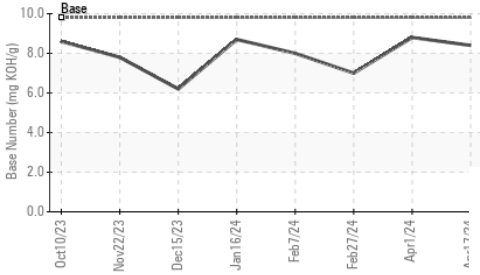

Viscosity @ 100°C

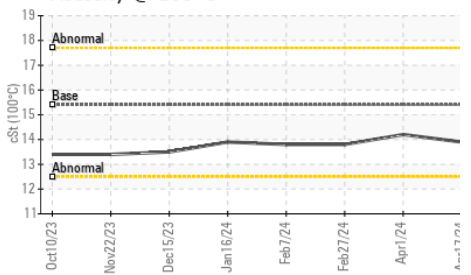


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	14.2

## GRAPHS


Ferrous Alloys

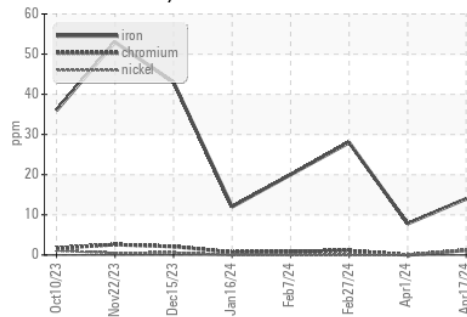


Non-ferrous Metals

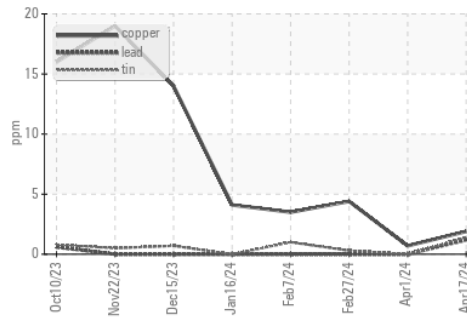

Viscosity @ 100°C

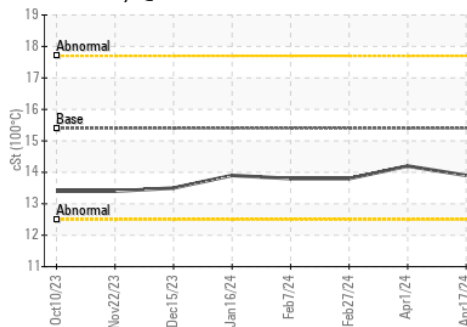

Base Number

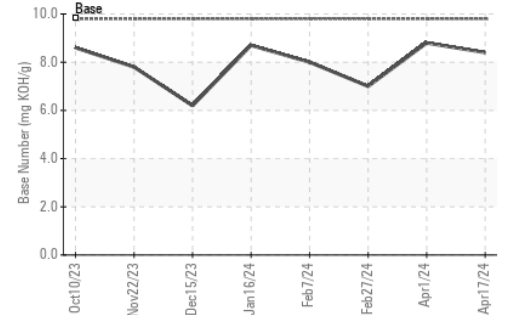

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0109427  
**Lab Number** : 06152876  
**Unique Number** : 10982954  
**Test Package** : FLEET

**Received** : 18 Apr 2024  
**Tested** : 19 Apr 2024  
**Diagnosed** : 19 Apr 2024 - Wes Davis

**GFL Environmental - 891 - Oklahoma City Hauling**  
 1001 South Rockwell  
 Oklahoma City, OK  
 US 73128

Contact: Andy Smith  
 andrew.smith@gflenv.com  
 T: (405)306-1651

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: