


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

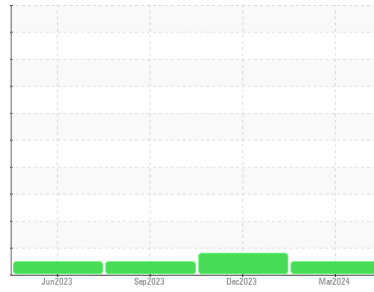

Machine Id  
**2227033**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0094625</b>	PCA0094596	PCA0094591
Sample Date	Client Info			<b>28 Mar 2024</b>	21 Dec 2023	15 Sep 2023
Machine Age	mls	Client Info		<b>130525</b>	93170	60771
Oil Age	mls	Client Info		<b>37355</b>	32399	36737
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>39</b>	43	45
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m	>2	<b>4</b>	▲ 7	3
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>6</b>	6	17
Lead	ppm	ASTM D5185m	>40	<b>1</b>	2	3
Copper	ppm	ASTM D5185m	>330	<b>16</b>	18	57
Tin	ppm	ASTM D5185m	>15	<b>2</b>	2	3
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>2</b>	1	6
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	50	<b>67</b>	70	73
Manganese	ppm	ASTM D5185m	0	<b>1</b>	1	2
Magnesium	ppm	ASTM D5185m	950	<b>962</b>	1031	878
Calcium	ppm	ASTM D5185m	1050	<b>1148</b>	1249	1092
Phosphorus	ppm	ASTM D5185m	995	<b>1069</b>	991	900
Zinc	ppm	ASTM D5185m	1180	<b>1285</b>	1306	1157
Sulfur	ppm	ASTM D5185m	2600	<b>3214</b>	2746	2663

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	6	8
Sodium	ppm	ASTM D5185m		<b>3</b>	<1	2
Potassium	ppm	ASTM D5185m	>20	<b>17</b>	23	47

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.9</b>	0.9	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.0</b>	11.0	11.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.1</b>	24.4	23.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.5</b>	20.9	20.0
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.7</b>	4.9	5.9





# OIL ANALYSIS REPORT

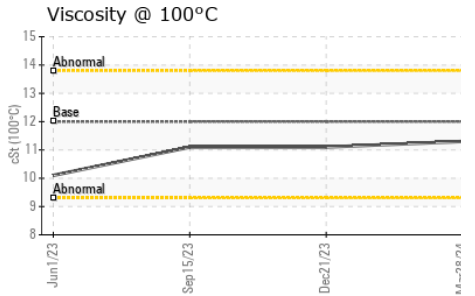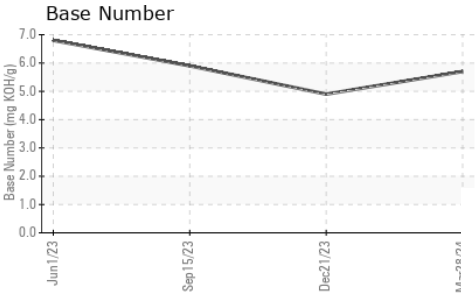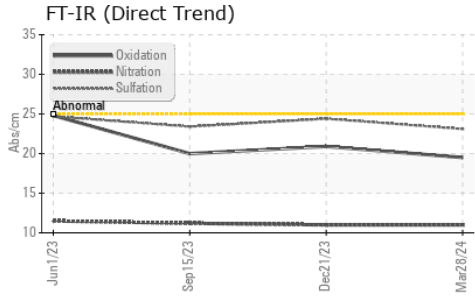

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.3	11.1

## GRAPHS

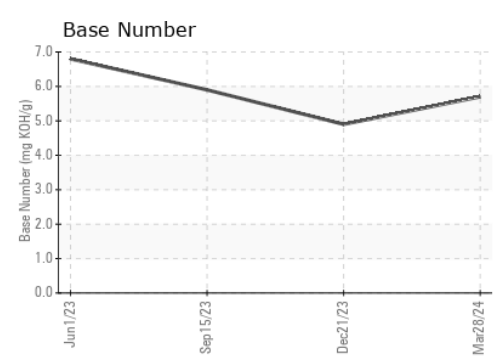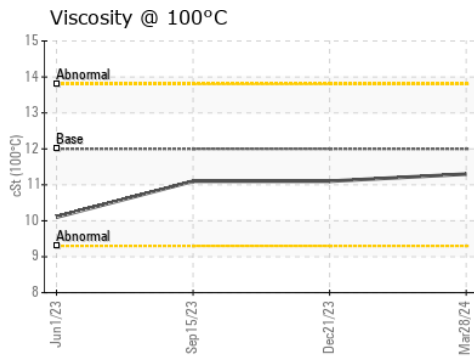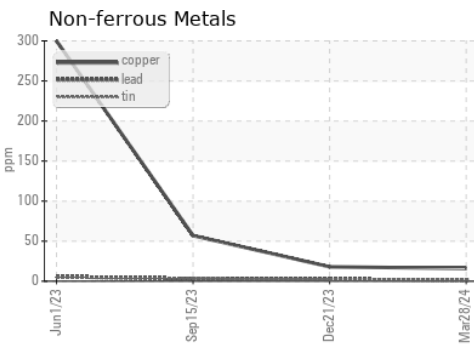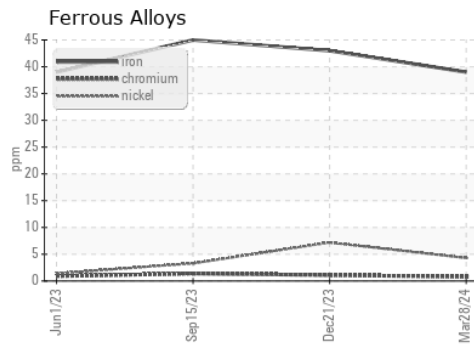

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0094625      **Received** : 18 Apr 2024  
**Lab Number** : 06153741      **Tested** : 19 Apr 2024  
**Unique Number** : 10983819      **Diagnosed** : 23 Apr 2024 - Jonathan Hester  
**Test Package** : FLEET

**PERDUE FARMS - WASHINGTON**  
 P.O. BOX 539  
 WASHINGTON, IN  
 US 47501  
 Contact: DEREK RYAN  
 derek.ryan@perdue.com  
 T: (812)257-3023  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)