




# OIL ANALYSIS REPORT

## Sample Rating Trend

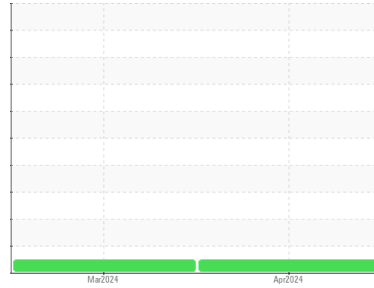

**NORMAL**



Area  
**(PX329R)**

Machine Id  
**10453**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0115673</b>	GFL0115714	---
Sample Date	Client Info			<b>18 Apr 2024</b>	28 Mar 2024	---
Machine Age	hrs	Client Info		<b>1901</b>	1779	---
Oil Age	hrs	Client Info		<b>122</b>	600	---
Oil Changed	Client Info			<b>Not Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	<b>5</b>	16	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>15	<b>1</b>	3	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>100	<b>&lt;1</b>	0	---
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>6</b>	8	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	60	<b>64</b>	60	---
Manganese	ppm	ASTM D5185m	0	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m	1010	<b>891</b>	875	---
Calcium	ppm	ASTM D5185m	1070	<b>1096</b>	1062	---
Phosphorus	ppm	ASTM D5185m	1150	<b>969</b>	990	---
Zinc	ppm	ASTM D5185m	1270	<b>1153</b>	1200	---
Sulfur	ppm	ASTM D5185m	2060	<b>3460</b>	3237	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	8	---
Sodium	ppm	ASTM D5185m		<b>4</b>	17	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	<b>0.2</b>	0.6	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.3</b>	7.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.0</b>	19.0	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>12.1</b>	14.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.1</b>	7.8	---







# OIL ANALYSIS REPORT

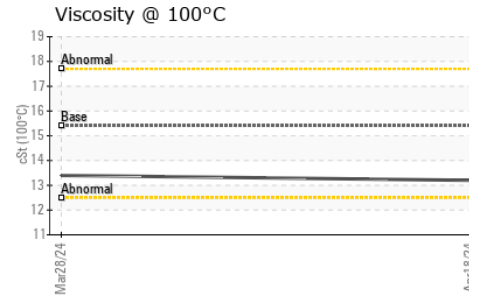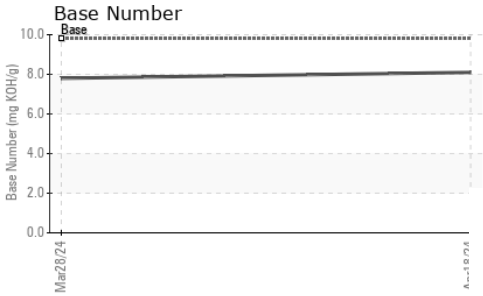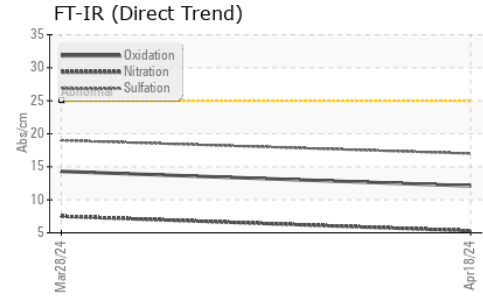

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.2</b>	13.4	---

## GRAPHS

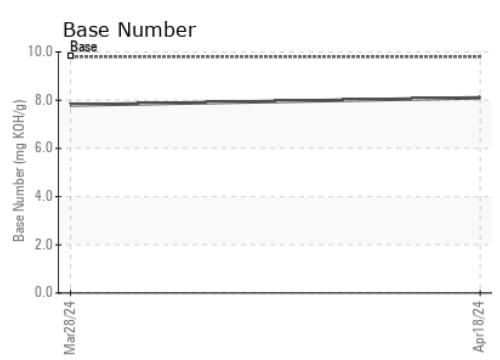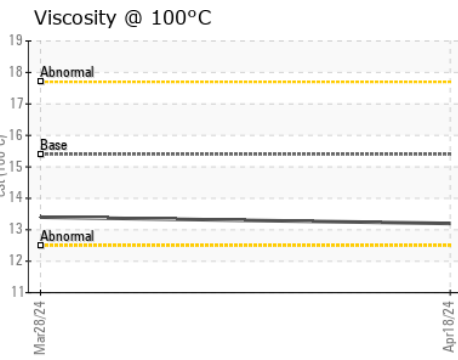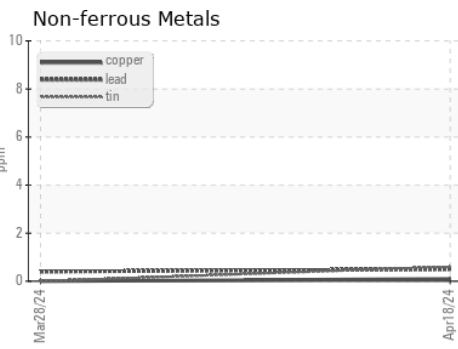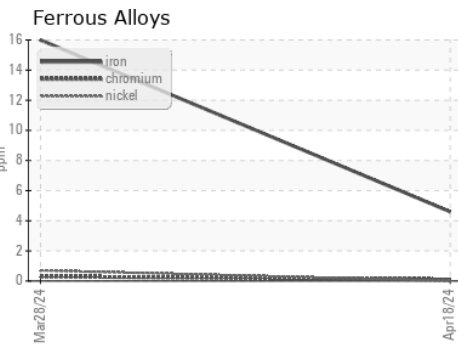

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115673      **Received** : 19 Apr 2024  
**Lab Number** : **06154078**      **Tested** : 22 Apr 2024  
**Unique Number** : 10989501      **Diagnosed** : 22 Apr 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: TECHNICIAN ACCOUNT  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)