




# OIL ANALYSIS REPORT

Sample Rating Trend

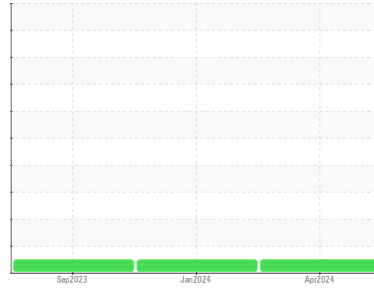

**NORMAL**



Machine Id  
**728083**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0111241</b>	GFL0102125	GFL0087936
Sample Date	Client Info		<b>11 Apr 2024</b>	08 Jan 2024	29 Sep 2023
Machine Age	hrs	Client Info	<b>13771</b>	13771	13771
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>6</b>	23	19
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>2</b>	5	6
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >150	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	<1	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	61	64
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>973</b>	1034	1052
Calcium	ppm	ASTM D5185m 1070	<b>1077</b>	1061	1169
Phosphorus	ppm	ASTM D5185m 1150	<b>1034</b>	1072	1095
Zinc	ppm	ASTM D5185m 1270	<b>1224</b>	1318	1384
Sulfur	ppm	ASTM D5185m 2060	<b>3640</b>	2940	3373

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>3</b>	6	7
Sodium	ppm	ASTM D5185m	<b>2</b>	7	4
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	8	10

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.5	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.1</b>	10.1	8.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.1</b>	21.0	20.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.9</b>	18.7	18.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.5</b>	6.5	7.2







# OIL ANALYSIS REPORT

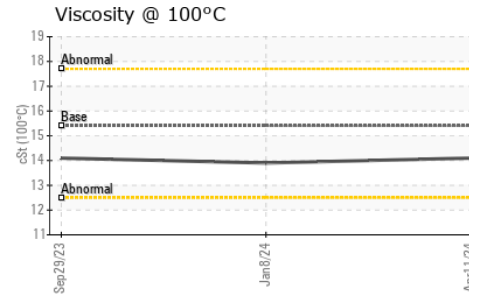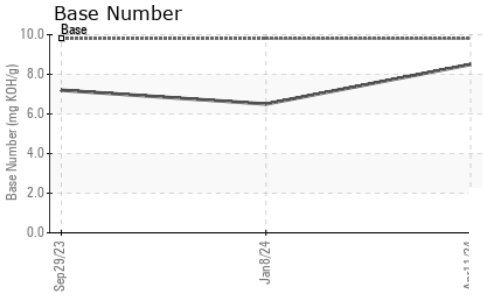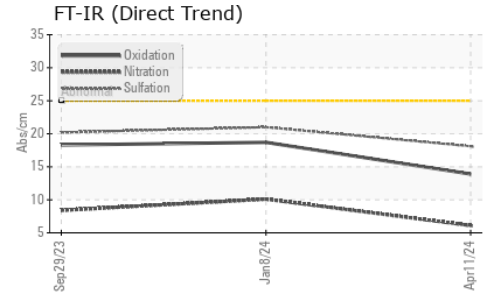

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	13.9	14.1

## GRAPHS

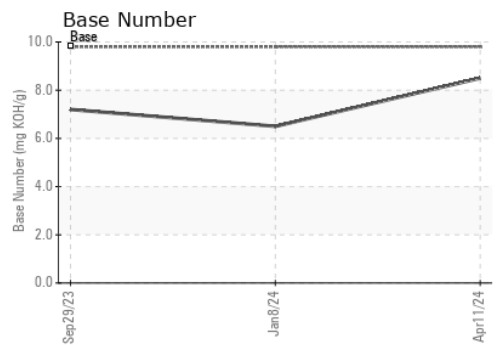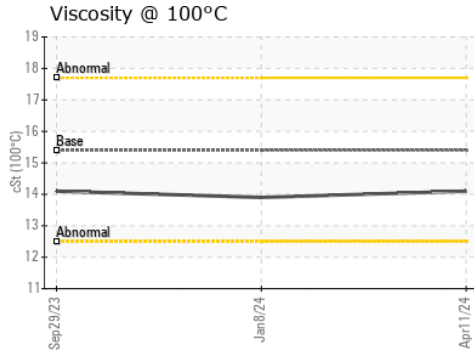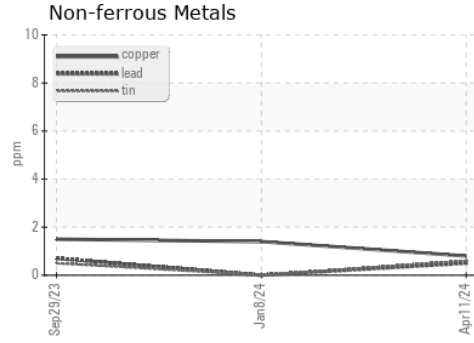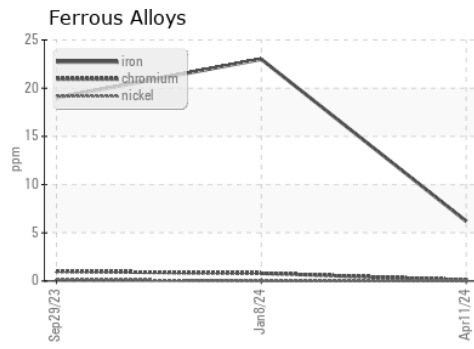

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0111241  
**Lab Number** : 06154093  
**Unique Number** : 10989516  
**Test Package** : FLEET  
**Received** : 19 Apr 2024  
**Tested** : 22 Apr 2024  
**Diagnosed** : 22 Apr 2024 - Wes Davis

**GFL Environmental - 960 - West Central HC JacksonvilleHC**  
 2263 State Hwy 104  
 Jacksonville, IL  
 US 62656  
 Contact: David Bradshaw  
 david.bradshaw@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)