




# OIL ANALYSIS REPORT

Sample Rating Trend

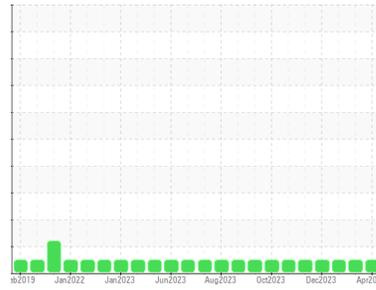

**NORMAL**



Machine Id  
**428060-402359**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0104984</b>	GFL0104903	GFL0104912
Sample Date	Client Info		<b>12 Apr 2024</b>	14 Mar 2024	30 Jan 2024
Machine Age	mls	Client Info	<b>292102</b>	16237	0
Oil Age	mls	Client Info	<b>292102</b>	16237	0
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>6</b>	8	8
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	1	1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	8	6
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	3	<1
Copper	ppm	ASTM D5185m >330	<b>3</b>	4	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	1	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	79	54
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>946</b>	1289	846
Calcium	ppm	ASTM D5185m 1070	<b>1055</b>	1456	921
Phosphorus	ppm	ASTM D5185m 1150	<b>996</b>	1644	938
Zinc	ppm	ASTM D5185m 1270	<b>1174</b>	1692	1145
Sulfur	ppm	ASTM D5185m 2060	<b>3482</b>	4888	2701

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	13	9
Sodium	ppm	ASTM D5185m	<b>3</b>	3	4
Potassium	ppm	ASTM D5185m >20	<b>0</b>	5	6

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	0.1	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.3</b>	5.5	8.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.9</b>	17.5	18.8


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.7</b>	13.7	15.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.8</b>	8.3	7.3




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

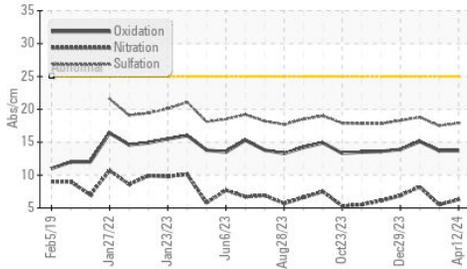

Base Number

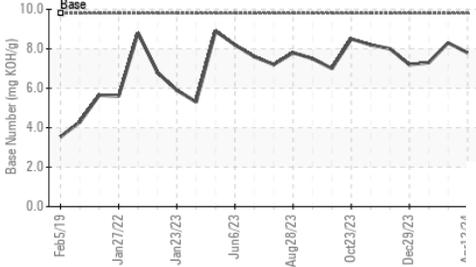

Viscosity @ 100°C

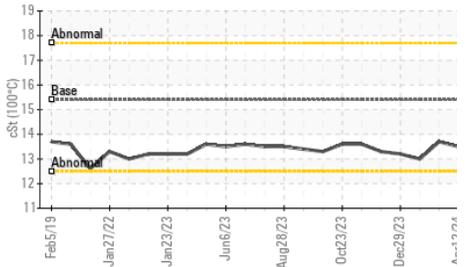


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.7

## GRAPHS


Ferrous Alloys

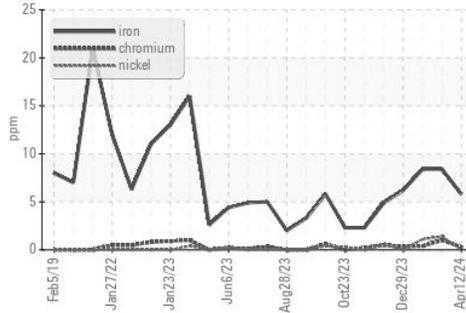


Non-ferrous Metals

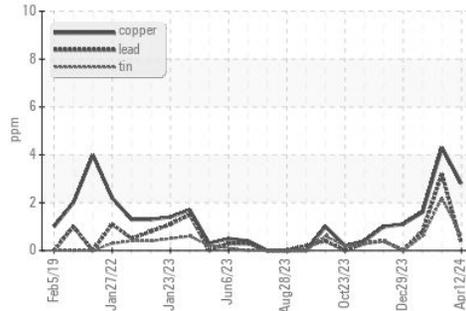

Viscosity @ 100°C

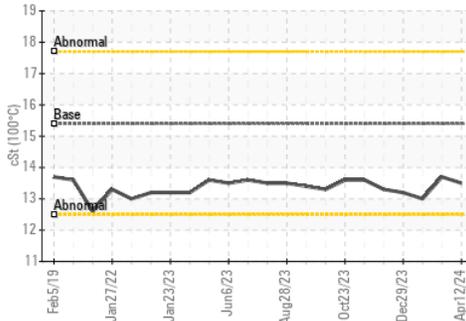

Base Number

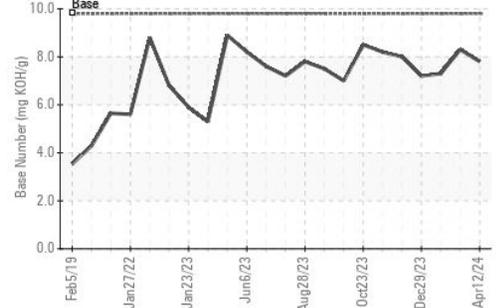

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0104984  
 Lab Number : 06154106  
 Unique Number : 10989529  
 Test Package : FLEET

Received : 19 Apr 2024  
 Tested : 22 Apr 2024  
 Diagnosed : 22 Apr 2024 - Wes Davis

GFL Environmental - 820 - Joplin Hauling  
 3700 West 7th Street  
 Joplin, MO  
 US 64801

Contact: James Jarrett  
 jjarrett@gflenv.com  
 T: (417)310-2802

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: