


# **OIL ANALYSIS REPORT**

# LINE 6 [908197399]

[LINE 6] DROP KISS SEED TANK LINE 6 - 2 DROP KISS SEED TANK LINE 6 - 2

### Gearbox

GEAR OIL (PAG) ISO 220 (--- GAL)





# DIAGNOSIS

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
	W// (1101)	Client Info	mm saco	PCA0100840	PCA0088990	
Sample Number Sample Date		Client Info		15 Mar 2024		
	hrs	Client Info		0	03 Aug 2023 0	
Machine Age	hrs	Client Info		0	0	
Oil Age	1115	Client Info		N/A	N/A	
Oil Changed		Client inio		NORMAL	NORMAL	
Sample Status				NORWAL	NORIVIAL	
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	
WEAR METAL	S	method	limit/base	current	history1	history2
PQ		ASTM D8184		17	10	
Iron	ppm	ASTM D5185m	>200	6	10	
Chromium	ppm	ASTM D5185m	>15	<1	0	
Nickel	ppm	ASTM D5185m	>15	0	0	
Titanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m		<1	0	
Aluminum	ppm	ASTM D5185m	>25	3	<1	
Lead	ppm	ASTM D5185m	>100	0	0	
Copper	ppm	ASTM D5185m	>200	<1	<1	
Tin	ppm	ASTM D5185m	>25	<1	0	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		<1	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	
Barium	ppm	ASTM D5185m	5	0	0	
Molybdenum	ppm	ASTM D5185m	5	0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	5	<1	3	
Calcium	ppm	ASTM D5185m	5	5	0	
Phosphorus	ppm	ASTM D5185m	775	910	517	
Zinc	ppm	ASTM D5185m	5	9	8	
Sulfur	ppm	ASTM D5185m	2000	844	622	
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	5	3	
Sodium	ppm	ASTM D5185m		2	1	
Potassium	ppm	ASTM D5185m	>20	2	<1	
FLUID DEGRA	NOITAC	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	2.00	0.82	0.54	



## **OIL ANALYSIS REPORT**

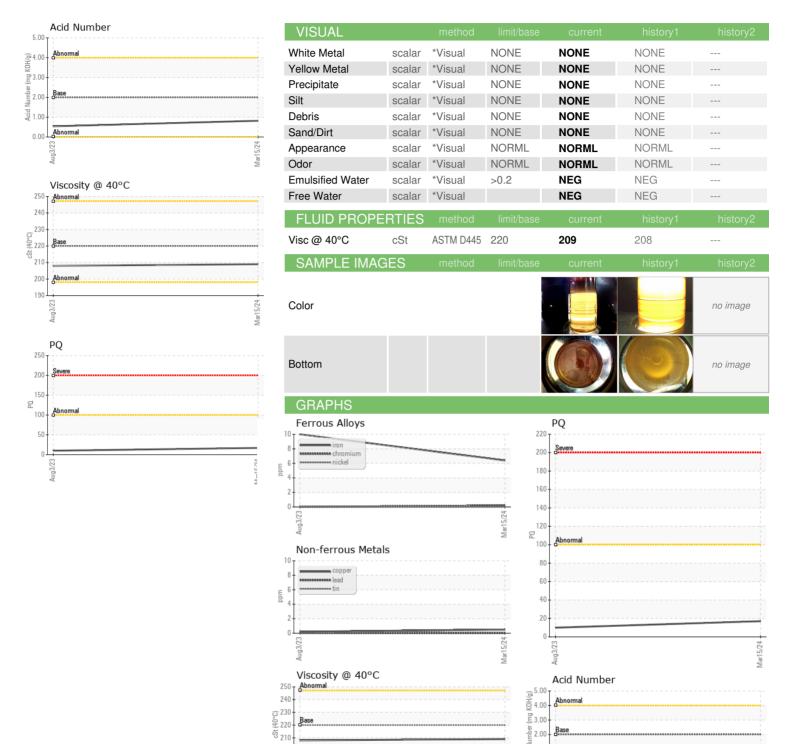





Certificate 12367

Laboratory

Sample No. Lab Number : 06154582

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

: PCA0100840 Unique Number : 10990005

200 190

> Received **Tested**

: 19 Apr 2024 : 22 Apr 2024 Diagnosed : 22 Apr 2024 - Wes Davis

1.00

0.00

THE HERSHEY COMPANY WEST HERSHEY - TECHNICAL ASSURANCE, 1033 OLDE WEST CHOCOLATE

HERSHEY, PA US 17033 Contact: CLINTON ZOHNER

clintzohner@hersheys.com

Test Package : IND 2 ( Additional Tests: PQ ) To discuss this sample report, contact Customer Service at 1-800-237-1369.  $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (717)374-4846 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (717)374-4594

Report Id: HERHER [WUSCAR] 06154582 (Generated: 04/23/2024 15:37:00) Rev: 1

Contact/Location: CLINTON ZOHNER - HERHER