




# OIL ANALYSIS REPORT

Sample Rating Trend

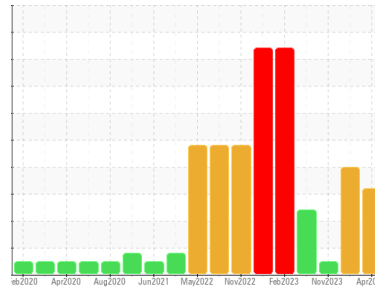

Area  
**(YA152761)**  
Machine Id  
**12067**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (32 QTS)**

## DIAGNOSIS

### Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Resample at the next service interval to monitor.

### Wear

Cylinder, crank, or cam shaft wear is indicated.

### Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0109713</b>	GFL0109743	GFL0092727
Sample Date	Client Info	<b>16 Apr 2024</b>	08 Feb 2024	03 Nov 2023
Machine Age	hrs	<b>0</b>	15602	8116
Oil Age	hrs	<b>0</b>	497	246
Oil Changed	Client Info	<b>N/A</b>	Changed	Not Changed
Sample Status		<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>▲ 106</b>	▲ 129	25
Chromium	ppm ASTM D5185m >20	<b>8</b>	4	1
Nickel	ppm ASTM D5185m >2	<b>4</b>	▲ 4	<1
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>● 19</b>	● 24	7
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185m >330	<b>192</b>	60	8
Tin	ppm ASTM D5185m >15	<b>1</b>	2	3
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	25	41
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>56</b>	42	50
Manganese	ppm ASTM D5185m 0	<b>2</b>	2	<1
Magnesium	ppm ASTM D5185m 1010	<b>816</b>	470	730
Calcium	ppm ASTM D5185m 1070	<b>1074</b>	1403	1586
Phosphorus	ppm ASTM D5185m 1150	<b>977</b>	704	921
Zinc	ppm ASTM D5185m 1270	<b>1129</b>	839	1174
Sulfur	ppm ASTM D5185m 2060	<b>2820</b>	2042	2993

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>▲ 53</b>	▲ 60	18
Sodium	ppm ASTM D5185m	<b>47</b>	29	7
Potassium	ppm ASTM D5185m >20	<b>28</b>	27	6

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>1.2</b>	0.9	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>10.9</b>	11.5	6.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.0</b>	23.7	20.9


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>19.1</b>	23.8	17.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.1</b>	8.4	8.8




# OIL ANALYSIS REPORT


▲ Silicon (ppm)

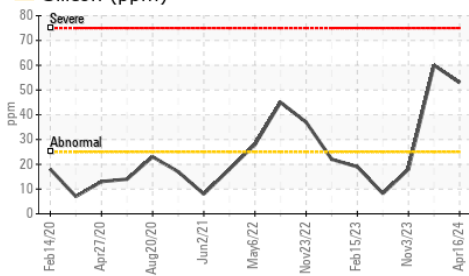


● Aluminum (ppm)

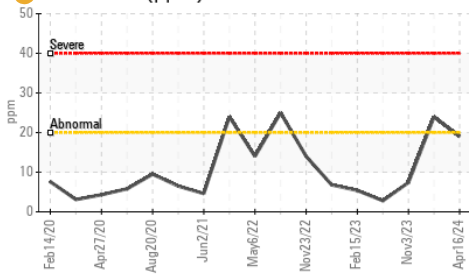


▲ FT-IR (Direct Trend)

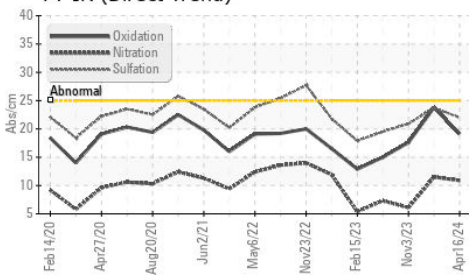

▲ FT-IR (Direct Trend)

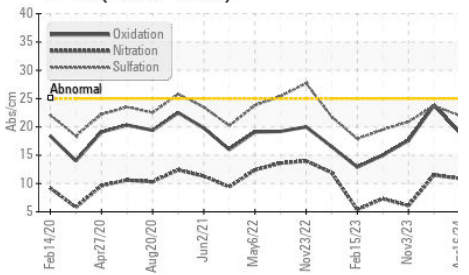

Base Number

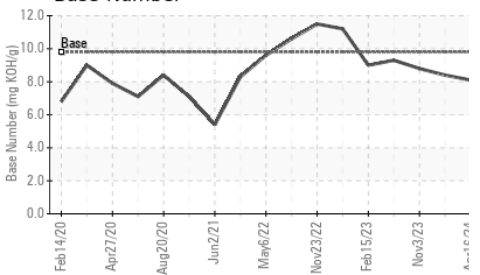


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	12.6

## GRAPHS


▲ Ferrous Alloys

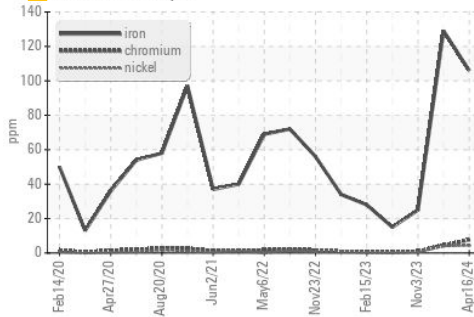


Non-ferrous Metals

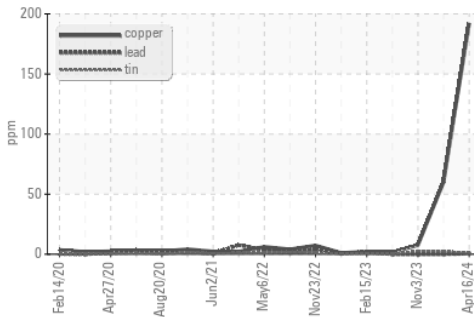

Viscosity @ 100°C

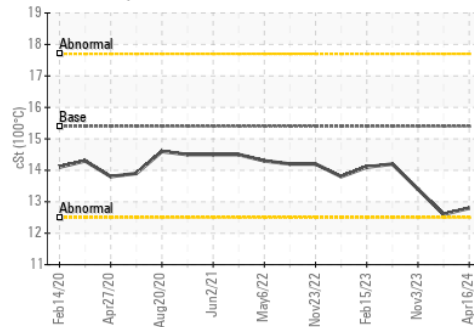

Base Number

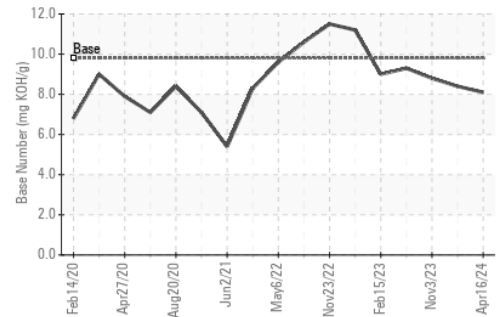

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0109713  
 Lab Number : 06155064  
 Unique Number : 10990487  
 Test Package : FLEET

Received : 19 Apr 2024

Tested : 24 Apr 2024

Diagnosed : 24 Apr 2024 - Jonathan Hester

GFL Environmental - 005 - Wilson/Tri-East(CNG)

2810 Contentnea Road S

Wilson, NC

US 27893-8501

Contact: SPENCER LIGGON

spencer.liggon@gflenv.com

T: (800)207-6618

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)