


# **OIL ANALYSIS REPORT**

# **Walgreens - Tractor** [Walgreens - Tractor] 136A624271

**Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (11 GAL)



### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core).

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


#### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

AL)			Dec2023	Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0119117	PCA0105920	
Sample Date		Client Info		11 Apr 2024	14 Dec 2023	
Machine Age	hrs	Client Info		45780	20009	
Oil Age	hrs	Client Info		45780	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ABNORMAL	ABNORMAL	
CONTAMINATI	ON	method	limit/base	current	history1	history2
-uel		WC Method	>5	<1.0	<1.0	
Nater		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METALS	S	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>80	63	36	
Chromium	ppm	ASTM D5185m	>5	4	3	
Nickel	ppm	ASTM D5185m	>2	2	1	
Γitanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m	>3	<1	<1	
Aluminum	ppm	ASTM D5185m		100	80	
_ead	ppm	ASTM D5185m	>30	<1	3	
Copper	ppm	ASTM D5185m		<u>^</u> 211	<u>\$\text{232}\$</u>	
Гin	ppm	ASTM D5185m	>5	5	4	
/anadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		<1	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	30	40	
Barium	ppm	ASTM D5185m	0	0	<1	
Molybdenum	ppm	ASTM D5185m	50	48	45	
Manganese	ppm	ASTM D5185m		5	4	
Magnesium	ppm	ASTM D5185m	950	596	653	
Calcium	ppm	ASTM D5185m	1050	1609	1763	
Phosphorus	ppm	ASTM D5185m	995	806	876	
Zinc	ppm	ASTM D5185m	1180	949	1051	
Sulfur	ppm	ASTM D5185m	2600	2184	2457	
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	9	8	
Sodium	ppm	ASTM D5185m		5	8	
Potassium	ppm	ASTM D5185m	>20	221	196	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	8.0	0.4	
Nitration	Abs/cm	*ASTM D7624	>20	10.0	7.3	
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.8	22.6	
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.8	20.3	
Base Number (BN)	mg KOH/g	ASTM D2896		7.2	8.6	



## **OIL ANALYSIS REPORT**

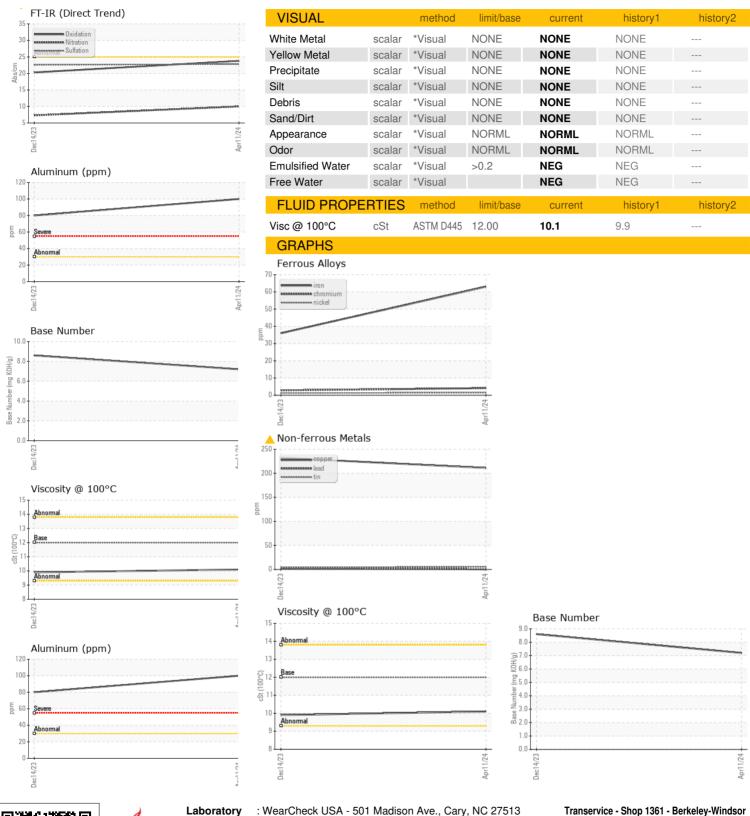





Certificate 12367

Laboratory Sample No.

Lab Number : 06155095 Unique Number : 10990518 Test Package : FLEET

: PCA0119117

Received **Tested** Diagnosed

: 19 Apr 2024 : 24 Apr 2024 : 24 Apr 2024 - Jonathan Hester 4400 State Road 19 Windsor, WI US 53598

Contact: Mike Hurda mhurda@transervice.com T: (608)846-2726

To discuss this sample report, contact Customer Service at 1-800-237-1369.  $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (608)846-0389 Submitted By: Mike Hurda