




# OIL ANALYSIS REPORT

Sample Rating Trend

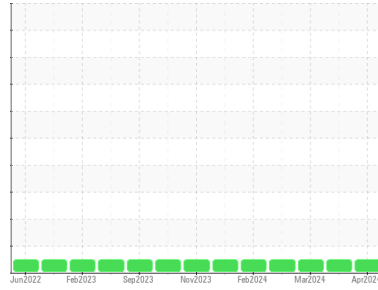

**NORMAL**



Area  
**(TKPM2)**

Machine Id  
**821057**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0116534</b>	GFL0116568	GFL0111900
Sample Date	Client Info	<b>18 Apr 2024</b>	10 Apr 2024	18 Mar 2024
Machine Age	hrs Client Info	<b>7628</b>	7561	7403
Oil Age	hrs Client Info	<b>7076</b>	7167	7128
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>12</b>	8	8
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>6</b>	5	5
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	1	0
Copper	ppm ASTM D5185m >330	<b>1</b>	<1	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>7</b>	6	7
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>63</b>	63	58
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>962</b>	884	935
Calcium	ppm ASTM D5185m 1070	<b>1178</b>	1170	1121
Phosphorus	ppm ASTM D5185m 1150	<b>1124</b>	980	1024
Zinc	ppm ASTM D5185m 1270	<b>1299</b>	1155	1265
Sulfur	ppm ASTM D5185m 2060	<b>3397</b>	3249	3288

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>6</b>	4	4
Sodium	ppm ASTM D5185m	<b>4</b>	5	3
Potassium	ppm ASTM D5185m >20	<b>11</b>	7	6

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.2	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>7.8</b>	7.5	7.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.2</b>	19.1	18.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.4</b>	15.3	14.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.2</b>	8.4	8.5







# OIL ANALYSIS REPORT

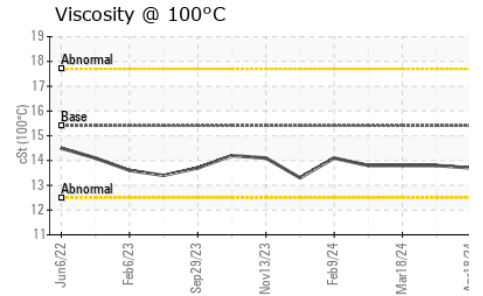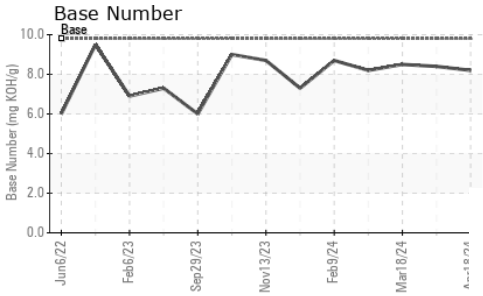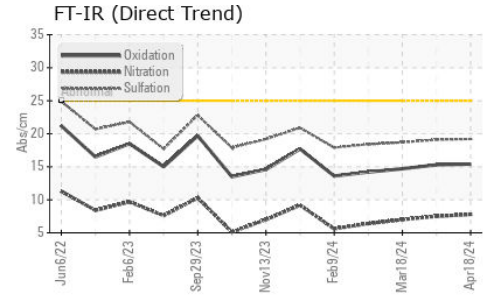

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	13.8

## GRAPHS

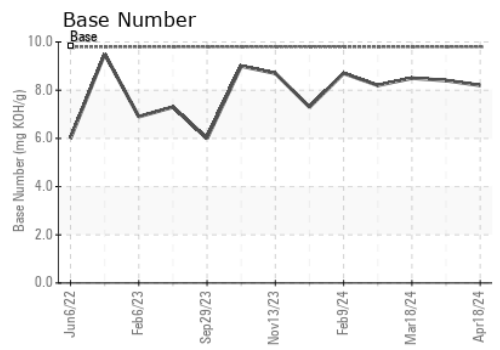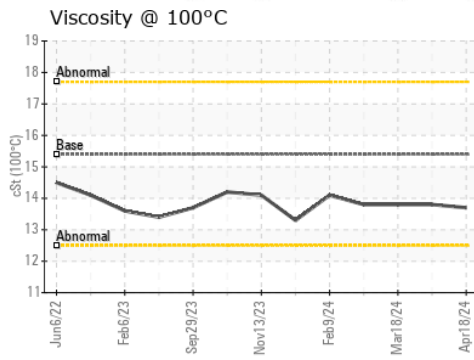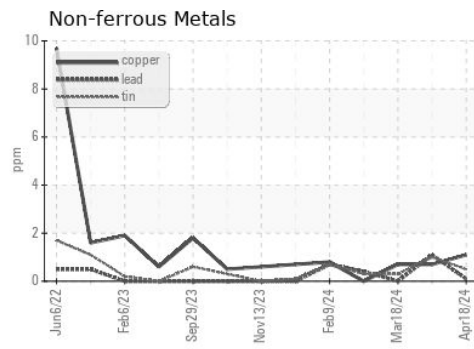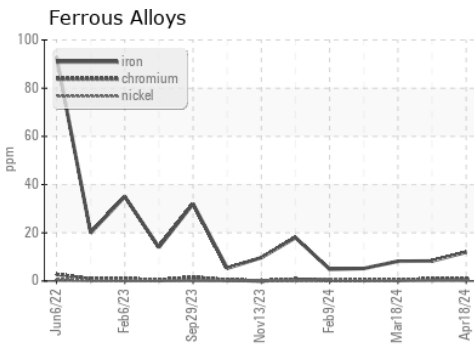

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116534      **Received** : 19 Apr 2024  
**Lab Number** : 06155109      **Tested** : 22 Apr 2024  
**Unique Number** : 10990532      **Diagnosed** : 22 Apr 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)