


# OIL ANALYSIS REPORT

## Sample Rating Trend



**DIRT**

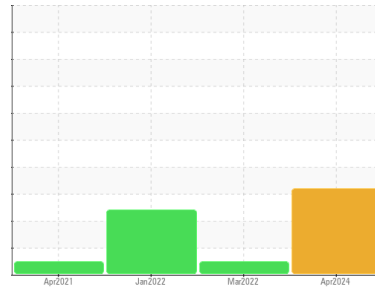

Machine Id

**MG / North feed conv**

Component

**Gearbox**

Fluid

**MOBIL MOBIL MOBILGEAR XMP 220 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check all areas where dirt can enter the system. Resample at the next service interval to monitor.

### Wear

Gear wear is indicated.

### Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0082737</b>	PCA0069302	PCA0058471
Sample Date	Client Info		<b>03 Apr 2024</b>	28 Mar 2022	18 Jan 2022
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	N/A
Sample Status			<b>ABNORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>▲ 231</b>	10	● 176
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>● 4</b>	2	9
Lead	ppm	ASTM D5185m >50	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >200	<b>3</b>	6	2
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Antimony	ppm	ASTM D5185m >5	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>59</b>	20	18
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Manganese	ppm	ASTM D5185m	<b>2</b>	0	2
Magnesium	ppm	ASTM D5185m	<b>4</b>	0	4
Calcium	ppm	ASTM D5185m 0	<b>9</b>	2	14
Phosphorus	ppm	ASTM D5185m 485	<b>243</b>	264	325
Zinc	ppm	ASTM D5185m 0	<b>4</b>	0	0
Sulfur	ppm	ASTM D5185m	<b>14536</b>	14064	14823





## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>▲ 55</b>	19	▲ 71
Sodium	ppm	ASTM D5185m	<b>0</b>	0	0
Potassium	ppm	ASTM D5185m >20	<b>4</b>	0	2

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	LIGHT
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG




# OIL ANALYSIS REPORT

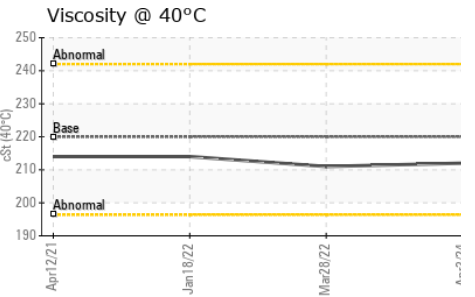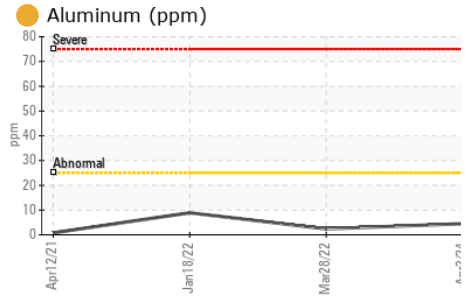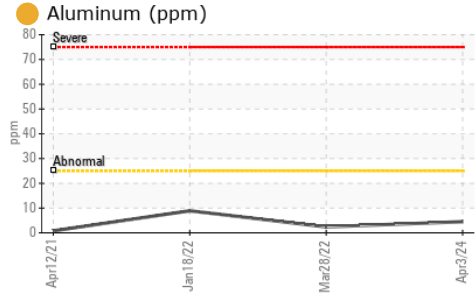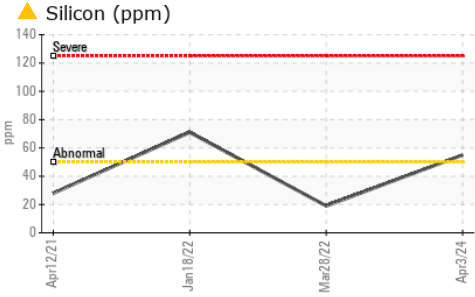

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	220	212	211	214

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

## GRAPHS

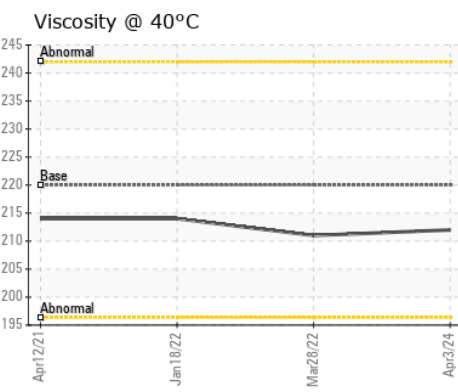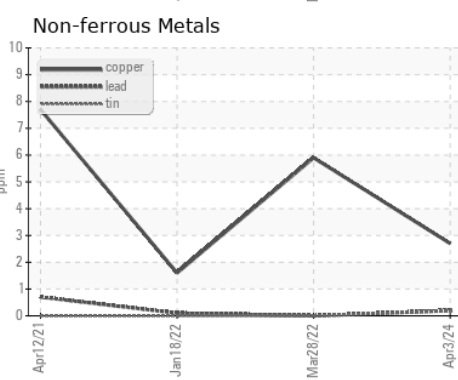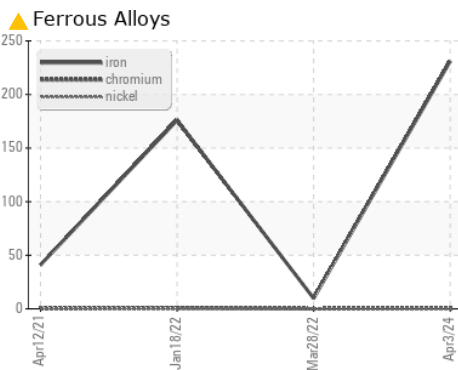

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0082737      **Received** : 19 Apr 2024  
**Lab Number** : 06155333      **Tested** : 24 Apr 2024  
**Unique Number** : 10990756      **Diagnosed** : 24 Apr 2024 - Sean Felton  
**Test Package** : FLEET

**AVR - APPLE VALLEY READY MIX**  
 14698 GALAXY AVE  
 APPLE VALLEY, MN  
 US 55124  
 Contact: COLE DAMBROTEN  
 coledambrotten@avrconcrete.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)