




OIL ANALYSIS REPORT

Sample Rating Trend

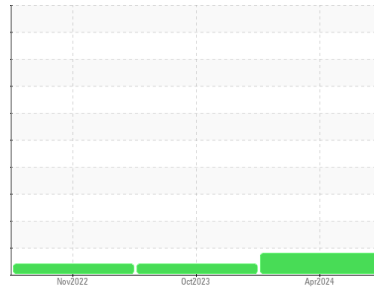

SEDIMENT



Machine Id
927074-260325

Component
Transmission (Auto)

Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of visible silt present in the sample.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | GFL0118755 | GFL0093714 | GFL0055628 |
| Sample Date | Client Info | 15 Apr 2024 | 24 Oct 2023 | 22 Nov 2022 |
| Machine Age | hrs | 18694 | 18001 | 16236 |
| Oil Age | hrs | 18694 | 0 | 1200 |
| Oil Changed | Client Info | Not Chngd | Not Chngd | Not Chngd |
| Sample Status | | ABNORMAL | ABNORMAL | ABNORMAL |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|------------|------------|----------|----------|
| Water | WC Method | NEG | NEG | NEG |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|----------|------------|--------------|----------|----------|
| Iron | ppm | 105 | 86 | 126 |
| Chromium | ppm | 0 | <1 | 0 |
| Nickel | ppm | 0 | 0 | 0 |
| Titanium | ppm | <1 | <1 | <1 |
| Silver | ppm | 0 | 0 | 0 |
| Aluminum | ppm | 20 | 15 | 27 |
| Lead | ppm | 21 | 27 | 61 |
| Copper | ppm | 47 | 26 | 37 |
| Tin | ppm | 4 | 3 | 1 |
| Vanadium | ppm | <1 | 0 | 0 |
| Cadmium | ppm | 0 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|------------|-------------|----------|----------|
| Boron | ppm | 22 | 83 | 89 |
| Barium | ppm | 0 | 19 | 0 |
| Molybdenum | ppm | 2 | 5 | 2 |
| Manganese | ppm | 2 | 1 | 1 |
| Magnesium | ppm | 35 | 72 | 25 |
| Calcium | ppm | 142 | 181 | 141 |
| Phosphorus | ppm | 250 | 315 | 237 |
| Zinc | ppm | 102 | 124 | 45 |
| Sulfur | ppm | 1777 | 2086 | 1512 |

CONTAMINANTS


| method | limit/base | current | history1 | history2 |
|-----------|------------|--------------|----------|----------|
| Silicon | ppm | 10 | 8 | 15 |
| Sodium | ppm | 7 | 8 | 2 |
| Potassium | ppm | <1 | 1 | 0 |

VISUAL

| method | limit/base | current | history1 | history2 |
|------------------|------------|----------------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG |
| Free Water | scalar | *Visual | NEG | NEG |



OIL ANALYSIS REPORT

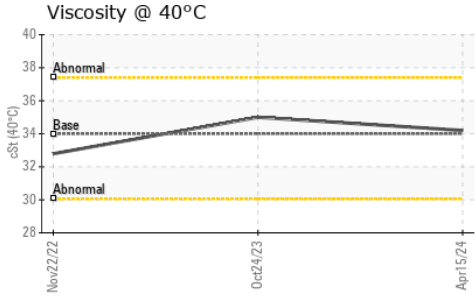




FLUID PROPERTIES

| method | limit/base | current | history1 | history2 |
|-------------|------------------|---------|----------|----------|
| Visc @ 40°C | cSt ASTM D445 34 | 34.2 | 35.0 | 32.79 |

SAMPLE IMAGES

| method | limit/base | current | history1 | history2 |
|--------|------------|----------|----------|----------|
| Color | | no image | no image | no image |
| Bottom | | no image | no image | no image |

GRAPHS

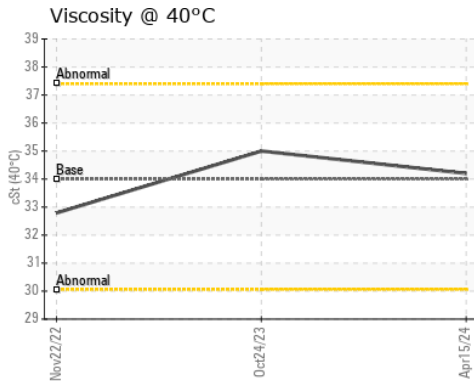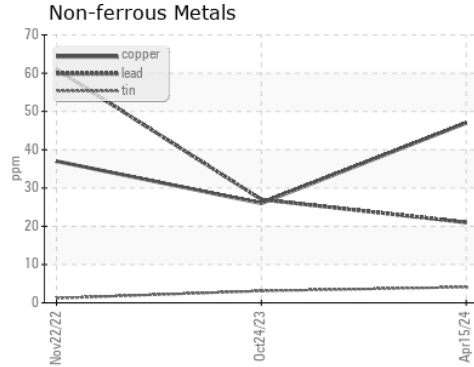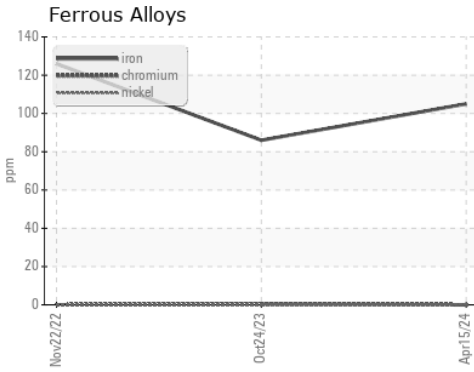

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0118755 **Received** : 19 Apr 2024
Lab Number : 06155392 **Tested** : 22 Apr 2024
Unique Number : 10990815 **Diagnosed** : 24 Apr 2024 - Don Baldrige
Test Package : FLEET

GFL Environmental - 837 - Harrison TS
 22820 S State Route 291
 Harrisonville, MO
 US 64701
 Contact: SARA PATRICK
 spatrack@gflenv.com

To discuss this sample report, CONTACT Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: