


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

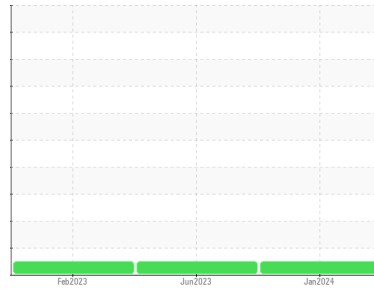

Area  
**(72531PC) Feldman Lumber-Tractor**  
 Machine Id  
**[Feldman Lumber-Tractor] 196A321**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |                 | method | limit/base | current            | history1    | history2    |
|--------------------|-----------------|--------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info     |        |            | <b>PCA0106080</b>  | PCA0098275  | PCA0089320  |
| Sample Date        | Client Info     |        |            | <b>26 Jan 2024</b> | 15 Jun 2023 | 02 Feb 2023 |
| Machine Age        | mls Client Info |        |            | <b>82439</b>       | 75512       | 68652       |
| Oil Age            | mls Client Info |        |            | <b>6927</b>        | 6860        | 7748        |
| Oil Changed        | Client Info     |        |            | <b>Changed</b>     | Changed     | Changed     |
| Sample Status      |                 |        |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water         | WC Method | >0.2   |            | <b>NEG</b>     | NEG      | NEG      |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >80        | <b>5</b>     | 7        | 9        |
| Chromium    | ppm | ASTM D5185m | >5         | <b>&lt;1</b> | 1        | 2        |
| Nickel      | ppm | ASTM D5185m | >2         | <b>0</b>     | 0        | 0        |
| Titanium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | <1       |
| Silver      | ppm | ASTM D5185m | >3         | <b>0</b>     | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >30        | <b>2</b>     | 3        | 7        |
| Lead        | ppm | ASTM D5185m | >30        | <b>0</b>     | 0        | 0        |
| Copper      | ppm | ASTM D5185m | >150       | <b>7</b>     | 4        | 9        |
| Tin         | ppm | ASTM D5185m | >5         | <b>&lt;1</b> | <1       | <1       |
| Vanadium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | <1       |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |




| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 2          | <b>28</b>    | 14       | 21       |
| Barium     | ppm | ASTM D5185m | 0          | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m | 50         | <b>63</b>    | 62       | 62       |
| Manganese  | ppm | ASTM D5185m | 0          | <b>&lt;1</b> | <1       | 1        |
| Magnesium  | ppm | ASTM D5185m | 950        | <b>741</b>   | 913      | 824      |
| Calcium    | ppm | ASTM D5185m | 1050       | <b>1177</b>  | 1160     | 1178     |
| Phosphorus | ppm | ASTM D5185m | 995        | <b>905</b>   | 993      | 915      |
| Zinc       | ppm | ASTM D5185m | 1180       | <b>1084</b>  | 1233     | 1152     |
| Sulfur     | ppm | ASTM D5185m | 2600       | <b>3278</b>  | 3609     | 3039     |

| CONTAMINANTS |     | method      | limit/base | current  | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >20        | <b>3</b> | 3        | 4        |
| Sodium       | ppm | ASTM D5185m |            | <b>1</b> | 2        | 1        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b> | 7        | 11       |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >3         | <b>0.2</b>  | 0.3      | 0.3      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>6.6</b>  | 7.1      | 7.1      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>18.1</b> | 18.9     | 19.0     |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>13.6</b> | 14.3     | 14.1     |
| Base Number (BN)  | mg KOH/g | ASTM D2896  |            | <b>8.6</b>  | 9.0      | 8.4      |





# OIL ANALYSIS REPORT

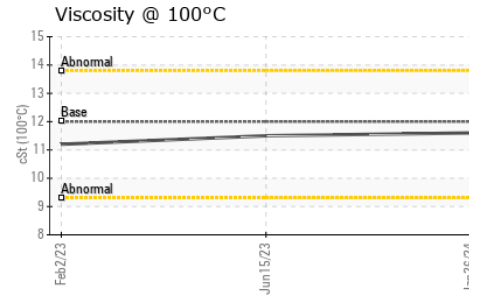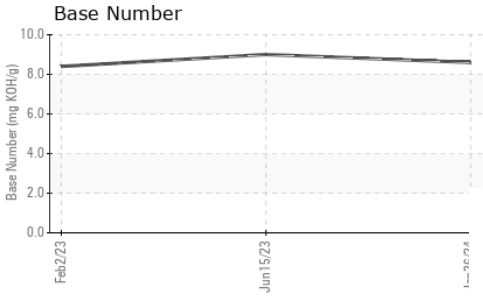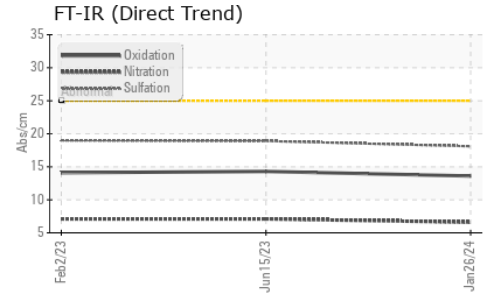

| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 12.00   | 11.6     | 11.5     |

## GRAPHS

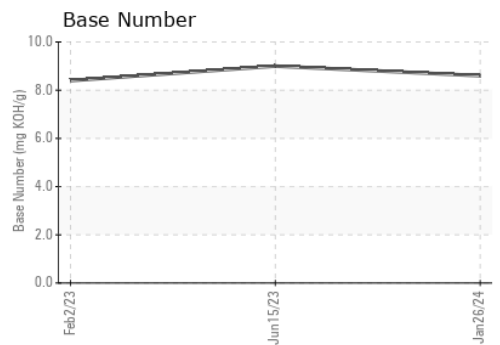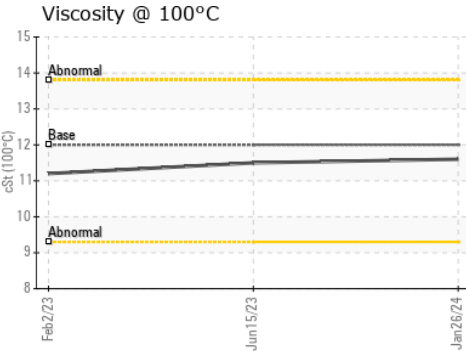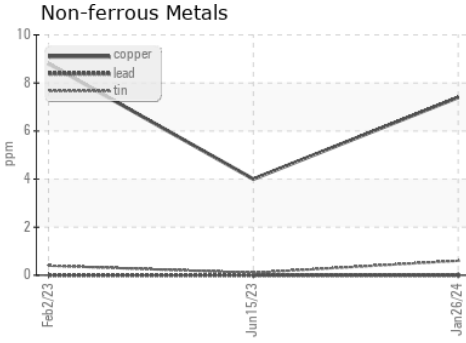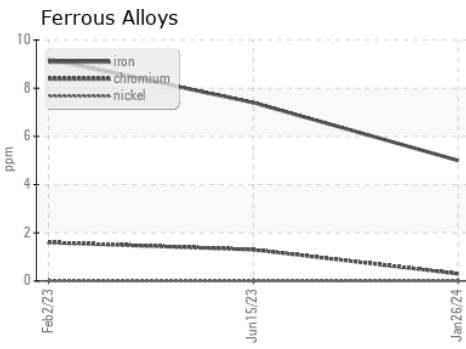

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0106080      **Received** : 22 Apr 2024  
**Lab Number** : 06155569      **Tested** : 23 Apr 2024  
**Unique Number** : 10990992      **Diagnosed** : 23 Apr 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1960 - Feldman Lumber Service**  
 1281 Metropolitan Avenue  
 Brooklyn, NY  
 US 11237  
 Contact: Marc Fried  
 mfried@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)