


# **OIL ANALYSIS REPORT**

# (69955Z) Walgreens - Tractor [Walgreens - Tractor] 136A624240

**Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (11





### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


#### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

GAL)				Apr2024		
	=					
SAMPLE INFOR	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0106569		
Sample Date		Client Info		11 Apr 2024		
Machine Age	mls	Client Info		64043		
Oil Age	mls	Client Info		64043		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	TION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	_S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	67		
Chromium	ppm	ASTM D5185m	>5	7		
Nickel	ppm	ASTM D5185m	>2	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>30	95		
Lead	ppm	ASTM D5185m	>30	1		
Copper	ppm	ASTM D5185m	>150	159		
Tin	ppm	ASTM D5185m	>5	5		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	22		
Barium	ppm	ASTM D5185m	0	<1		
Molybdenum	ppm	ASTM D5185m	50	40		
Manganese	ppm	ASTM D5185m	0	5		
Magnesium	ppm	ASTM D5185m	950	502		
Calcium	ppm	ASTM D5185m	1050	1607		
Phosphorus	ppm	ASTM D5185m	995	608		
Zinc	ppm	ASTM D5185m	1180	747		
Sulfur	ppm	ASTM D5185m	2600	1825		
CONTAMINAN	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	8		
Sodium	ppm	ASTM D5185m		7		
Potassium	ppm	ASTM D5185m	>20	201		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4		
Nitration	Abs/cm	*ASTM D7624	>20	11.0		
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.2		
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.6		
Base Number (BN)	mg KOH/g	ASTM D2896		5.8		
, ,						



## **OIL ANALYSIS REPORT**

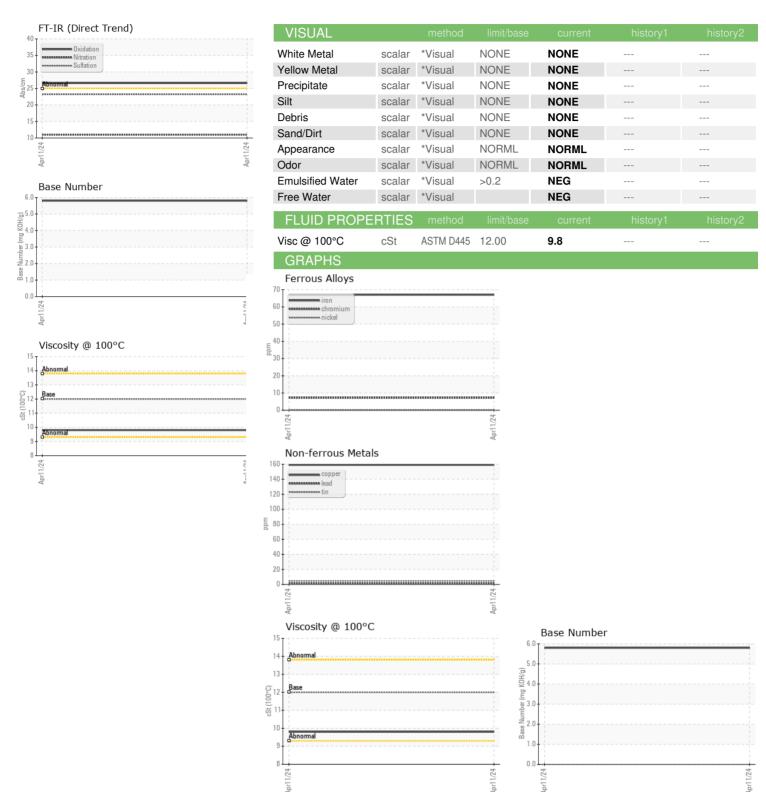





Certificate 12367

Laboratory Sample No.

Lab Number : 06155583

: PCA0106569 Unique Number : 10991006

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received Tested Test Package : FLEET

: 23 Apr 2024 Diagnosed

: 24 Apr 2024 - Sean Felton

: 22 Apr 2024

US 75167 Contact: Robert Beal rbeal@transervice.com T: (972)923-9928

710 Ovilla Road

Waxahachie, TX

To discuss this sample report, contact Customer Service at 1-800-237-1369.  $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (972)923-9919 Contact/Location: Robert Beal - TSV1369

Transervice - Shop 1369 - Berkeley-Waxahachie