


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

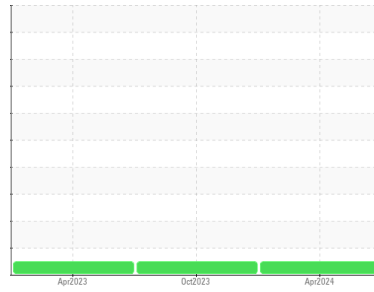

Area
(30551Z) Walgreens - Tractor
 Machine Id
[Walgreens - Tractor] 136A62521
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0106568	PCA0103530	PCA0094955
Sample Date	Client Info			12 Apr 2024	13 Oct 2023	07 Apr 2023
Machine Age	mls	Client Info		326180	283739	227465
Oil Age	mls	Client Info		60000	60000	40000
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	25	20	21
Chromium	ppm	ASTM D5185m	>4	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>25	7	6	4
Lead	ppm	ASTM D5185m	>45	<1	1	<1
Copper	ppm	ASTM D5185m	>85	17	2	4
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	0	6	<1
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	59	62	57
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	950	923	891	936
Calcium	ppm	ASTM D5185m	1050	1050	1047	1086
Phosphorus	ppm	ASTM D5185m	995	895	989	995
Zinc	ppm	ASTM D5185m	1180	1125	1220	1216
Sulfur	ppm	ASTM D5185m	2600	3006	2726	2786

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	8	10	7
Sodium	ppm	ASTM D5185m		2	1	2
Potassium	ppm	ASTM D5185m	>20	8	6	8

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	9.3	9.4	8.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	24.4	19.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.6	22.2	16.6
Base Number (BN)	mg KOH/g	ASTM D2896		6.8	6.0	6.4





OIL ANALYSIS REPORT

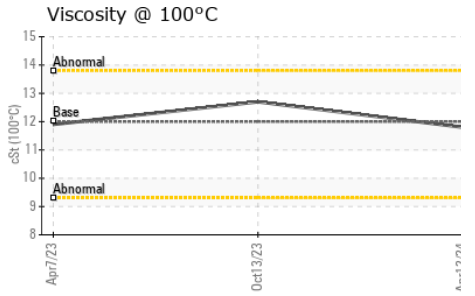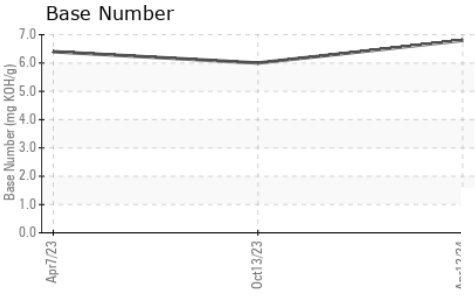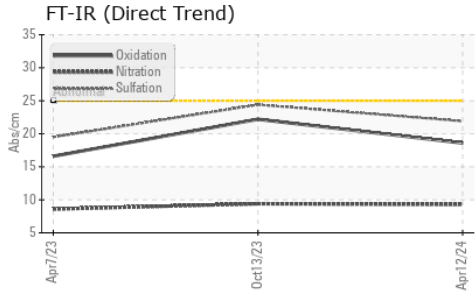

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.8	12.7

GRAPHS

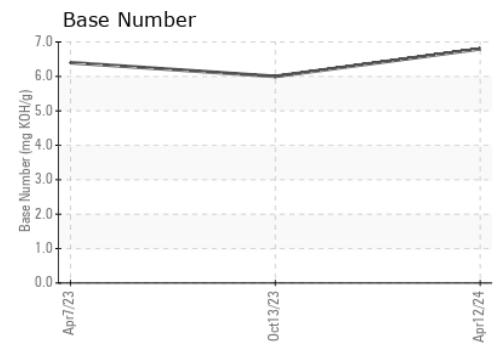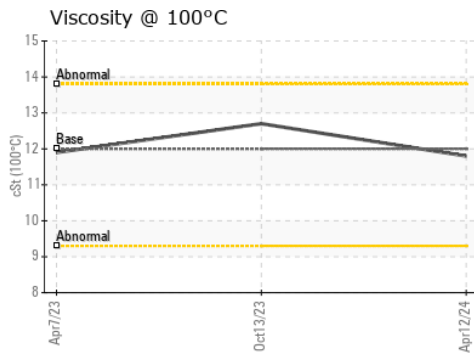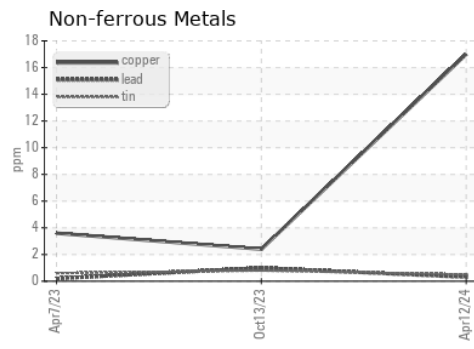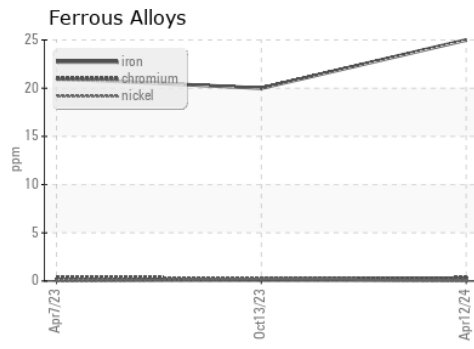

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0106568 **Received** : 22 Apr 2024
Lab Number : 06155584 **Tested** : 23 Apr 2024
Unique Number : 10991007 **Diagnosed** : 23 Apr 2024 - Wes Davis
Test Package : FLEET

Transervice - Shop 1369 - Berkeley-Waxahachie
 710 Ovilla Road
 Waxahachie, TX
 US 75167
 Contact: Robert Beal
 rbeal@transervice.com
 T: (972)923-9928
 F: (972)923-9919

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)