




OIL ANALYSIS REPORT

Sample Rating Trend

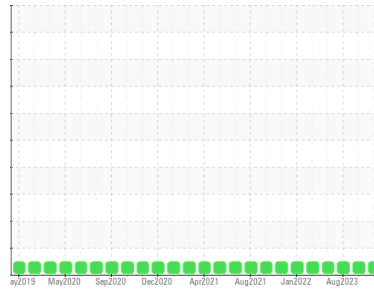

NORMAL



Area
(NH8765)
 Machine Id
AUTOCAR 10909C
 Component
Natural Gas Engine
 Fluid
PETRO CANADA DURON GEO LD 15W40 (9 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0109654	GFL0087522	GFL0087538
Sample Date	Client Info		19 Apr 2024	10 Oct 2023	09 Aug 2023
Machine Age	hrs	Client Info	9957	9472	9237
Oil Age	hrs	Client Info	1731	1246	1011
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	6	11	11
Chromium	ppm	ASTM D5185m >4	<1	<1	1
Nickel	ppm	ASTM D5185m >2	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >3	<1	0	0
Aluminum	ppm	ASTM D5185m >9	<1	<1	1
Lead	ppm	ASTM D5185m >30	0	<1	2
Copper	ppm	ASTM D5185m >35	2	<1	<1
Tin	ppm	ASTM D5185m >4	<1	0	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	42	2	8
Barium	ppm	ASTM D5185m 5	2	0	0
Molybdenum	ppm	ASTM D5185m 50	48	59	58
Manganese	ppm	ASTM D5185m 0	1	0	<1
Magnesium	ppm	ASTM D5185m 560	582	561	612
Calcium	ppm	ASTM D5185m 1510	1552	1641	1802
Phosphorus	ppm	ASTM D5185m 780	806	688	764
Zinc	ppm	ASTM D5185m 870	928	1008	1085
Sulfur	ppm	ASTM D5185m 2040	2794	2352	3015

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	5	4	4
Sodium	ppm	ASTM D5185m	6	7	6
Potassium	ppm	ASTM D5185m >20	0	0	<1

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0	0	0.1
Nitration	Abs/cm	*ASTM D7624 >20	7.5	11.1	10.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.0	21.3	19.9

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.1	17.7	17.0
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	8.1	4.2	5.2







OIL ANALYSIS REPORT

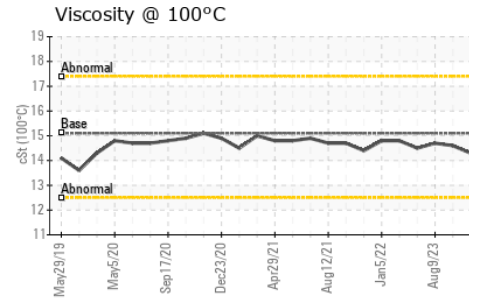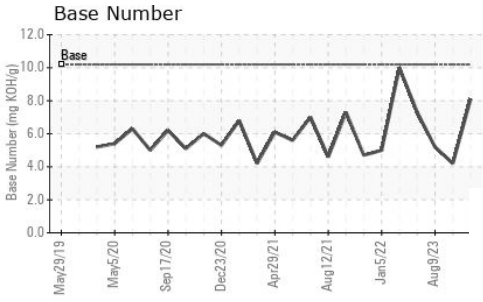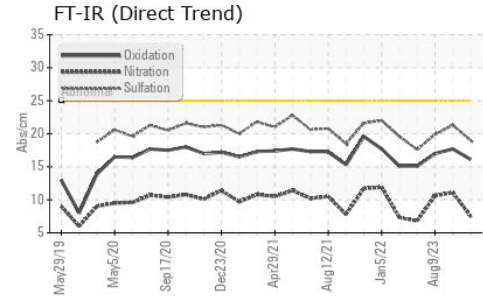

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	14.3	14.6	14.7

GRAPHS

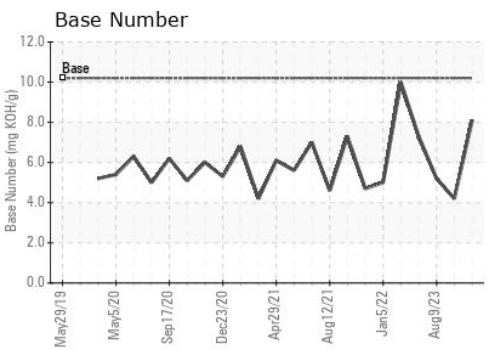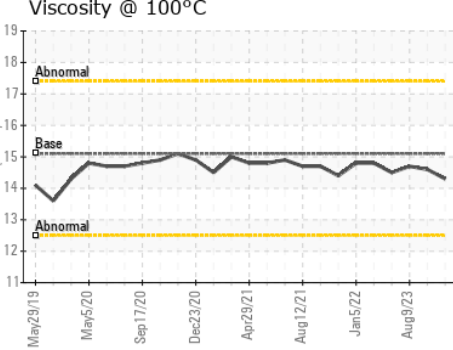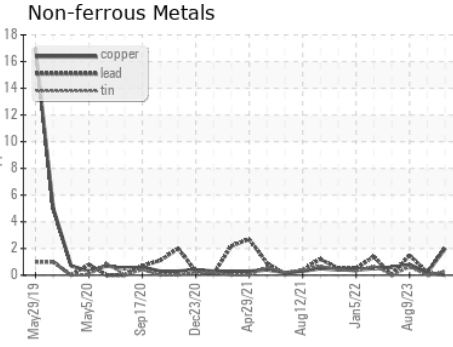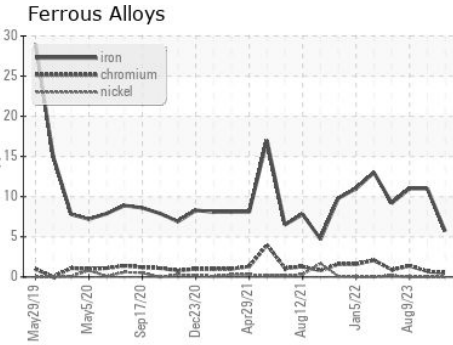

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109654 **Received** : 22 Apr 2024
Lab Number : 06155596 **Tested** : 23 Apr 2024
Unique Number : 10991019 **Diagnosed** : 23 Apr 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 331 - Columbus
 180 Ada Moore Rd
 Columbus, NC
 US 28722
 Contact: Matt Segars
 matt.segars@gflenv.com
 T: (800)207-6618
 F: (252)617-2494

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)