



# OIL ANALYSIS REPORT


Area  
(H904539)

Machine Id  
**3537**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (8 GAL)**

Sample Rating Trend

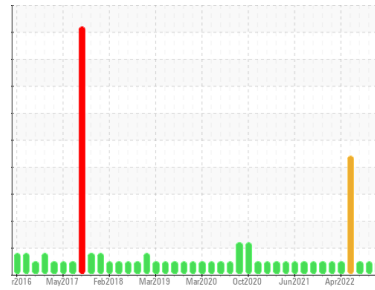

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1    | history2    |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | <b>GFL0099723</b>  | GFL0073294  | GFL0073306  |
| Sample Date   | Client Info | <b>18 Apr 2024</b> | 30 Nov 2023 | 07 Aug 2023 |
| Machine Age   | hrs         | <b>600</b>         | 600         | 600         |
| Oil Age       | hrs         | <b>600</b>         | 600         | 600         |
| Oil Changed   | Client Info | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

| method | limit/base     | current    | history1 | history2 |
|--------|----------------|------------|----------|----------|
| Water  | WC Method >0.2 | <b>NEG</b> | NEG      | NEG      |
| Glycol | WC Method      | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

| method   | limit/base           | current      | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron     | ppm ASTM D5185m >75  | <b>12</b>    | 49       | 33       |
| Chromium | ppm ASTM D5185m >5   | <b>&lt;1</b> | <1       | 1        |
| Nickel   | ppm ASTM D5185m >4   | <b>0</b>     | 0        | 0        |
| Titanium | ppm ASTM D5185m >2   | <b>&lt;1</b> | 9        | 9        |
| Silver   | ppm ASTM D5185m >2   | <b>&lt;1</b> | 0        | <1       |
| Aluminum | ppm ASTM D5185m >15  | <b>1</b>     | 2        | <1       |
| Lead     | ppm ASTM D5185m >25  | <b>0</b>     | 2        | 0        |
| Copper   | ppm ASTM D5185m >100 | <b>44</b>    | 132      | 10       |
| Tin      | ppm ASTM D5185m >4   | <b>&lt;1</b> | 0        | <1       |
| Vanadium | ppm ASTM D5185m      | <b>0</b>     | 0        | 0        |
| Cadmium  | ppm ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

| method     | limit/base           | current     | history1 | history2 |
|------------|----------------------|-------------|----------|----------|
| Boron      | ppm ASTM D5185m 0    | <b>16</b>   | 8        | 20       |
| Barium     | ppm ASTM D5185m 0    | <b>2</b>    | 2        | 2        |
| Molybdenum | ppm ASTM D5185m 60   | <b>75</b>   | 81       | 78       |
| Manganese  | ppm ASTM D5185m 0    | <b>2</b>    | 3        | 3        |
| Magnesium  | ppm ASTM D5185m 1010 | <b>738</b>  | 860      | 871      |
| Calcium    | ppm ASTM D5185m 1070 | <b>1280</b> | 1303     | 1187     |
| Phosphorus | ppm ASTM D5185m 1150 | <b>997</b>  | 980      | 960      |
| Zinc       | ppm ASTM D5185m 1270 | <b>1158</b> | 1295     | 1183     |
| Sulfur     | ppm ASTM D5185m 2060 | <b>3360</b> | 2879     | 3635     |

## CONTAMINANTS

| method    | limit/base          | current        | history1 | history2 |
|-----------|---------------------|----------------|----------|----------|
| Silicon   | ppm ASTM D5185m >25 | <b>4</b>       | 21       | 19       |
| Sodium    | ppm ASTM D5185m     | <b>3</b>       | 2        | 3        |
| Potassium | ppm ASTM D5185m >20 | <b>&lt;1</b>   | 0        | 2        |
| Fuel      | % ASTM D3524 >3.0   | <b>&lt;1.0</b> | 1.2      | 0.6      |

## INFRA-RED

| method    | limit/base               | current     | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot %    | % *ASTM D7844 >6         | <b>0.3</b>  | 0.7      | 0.3      |
| Nitration | Abs/cm *ASTM D7624 >20   | <b>6.8</b>  | 9.6      | 7.5      |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | <b>18.4</b> | 20.1     | 16.9     |


## FLUID DEGRADATION

| method           | limit/base               | current     | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm *ASTM D7414 >25 | <b>13.2</b> | 15.1     | 12.4     |
| Base Number (BN) | mg KOH/g ASTM D2896 9.8  | <b>7.8</b>  | 6.2      | 7.7      |




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

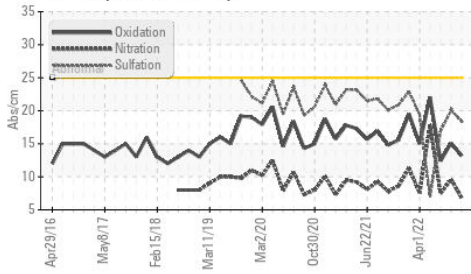


Fuel Dilution

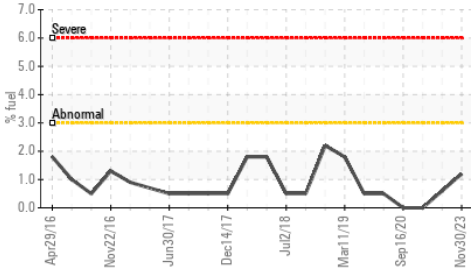

Viscosity @ 100°C

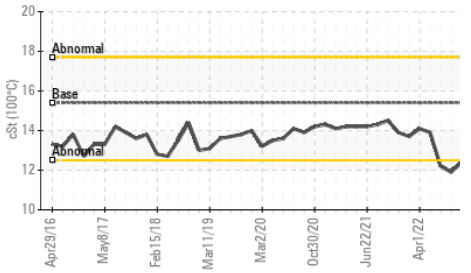

Fuel Dilution

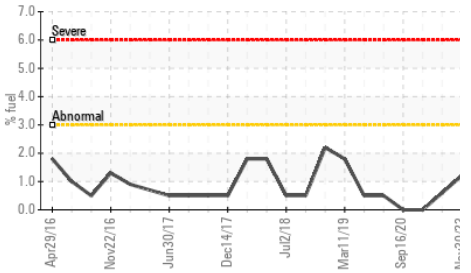

Viscosity @ 100°C




| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 12.4     | 11.9     |

## GRAPHS


Ferrous Alloys

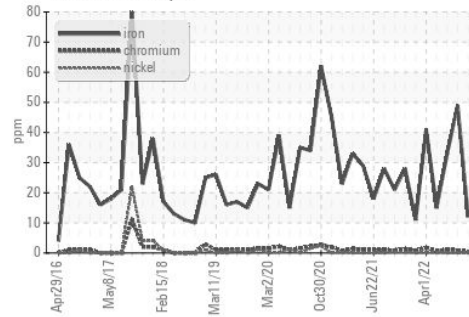


Non-ferrous Metals

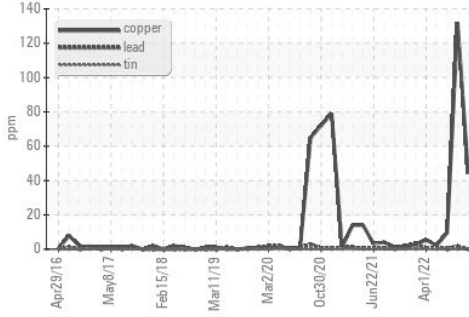

Viscosity @ 100°C

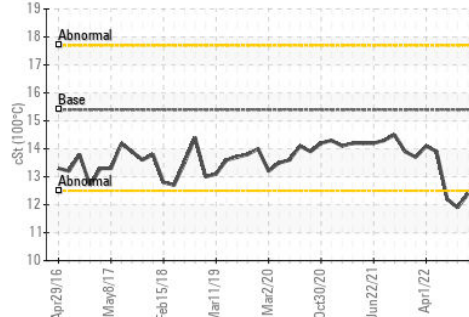

Base Number

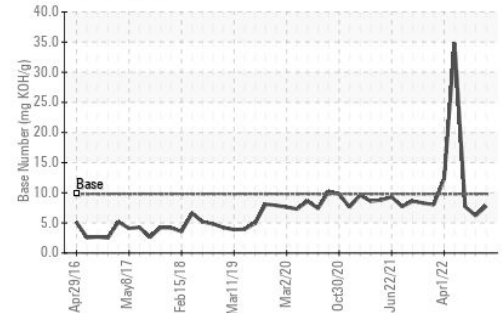

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0099723

Lab Number : 06155681

Unique Number : 10991104

Test Package : FLEET ( Additional Tests : FuelDilution )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 22 Apr 2024

Tested : 24 Apr 2024

Diagnosed : 24 Apr 2024 - Jonathan Hester

GFL Environmental - 102 - Morristown TN

415 Ryder Lane, PO Box 1894

Morristown, TN

US 37813

Contact: Ricky Dunlap

ricky.dunlap@gflenv.com

T: (800)207-6618

F: