




# OIL ANALYSIS REPORT

Sample Rating Trend

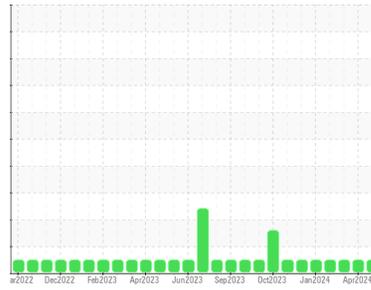

**NORMAL**



Machine Id

**731115**

Component

**Natural Gas Engine**

Fluid

**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1    | history2    |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | <b>GFL0114068</b>  | GFL0117199  | GFL0114023  |
| Sample Date   | Client Info | <b>18 Apr 2024</b> | 02 Apr 2024 | 13 Mar 2024 |
| Machine Age   | hrs         | <b>7077</b>        | 6960        | 6817        |
| Oil Age       | hrs         | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info | <b>Not Changed</b> | Not Changed | Not Changed |
| Sample Status |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

| method | limit/base     | current    | history1 | history2 |
|--------|----------------|------------|----------|----------|
| Water  | WC Method >0.1 | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

| method   | limit/base | current         | history1     | history2 |    |
|----------|------------|-----------------|--------------|----------|----|
| Iron     | ppm        | ASTM D5185m >50 | <b>11</b>    | 10       | 4  |
| Chromium | ppm        | ASTM D5185m >4  | <b>&lt;1</b> | <1       | <1 |
| Nickel   | ppm        | ASTM D5185m >2  | <b>0</b>     | 1        | 0  |
| Titanium | ppm        | ASTM D5185m     | <b>0</b>     | 0        | 0  |
| Silver   | ppm        | ASTM D5185m >3  | <b>0</b>     | 0        | 0  |
| Aluminum | ppm        | ASTM D5185m >9  | <b>1</b>     | 3        | 3  |
| Lead     | ppm        | ASTM D5185m >30 | <b>&lt;1</b> | 3        | 0  |
| Copper   | ppm        | ASTM D5185m >35 | <b>3</b>     | <1       | 2  |
| Tin      | ppm        | ASTM D5185m >4  | <b>&lt;1</b> | 1        | <1 |
| Vanadium | ppm        | ASTM D5185m     | <b>0</b>     | <1       | 0  |
| Cadmium  | ppm        | ASTM D5185m     | <b>0</b>     | 0        | 0  |

## ADDITIVES

| method     | limit/base | current          | history1    | history2 |      |
|------------|------------|------------------|-------------|----------|------|
| Boron      | ppm        | ASTM D5185m 50   | <b>12</b>   | 11       | 17   |
| Barium     | ppm        | ASTM D5185m 5    | <b>1</b>    | 0        | 0    |
| Molybdenum | ppm        | ASTM D5185m 50   | <b>56</b>   | 54       | 46   |
| Manganese  | ppm        | ASTM D5185m 0    | <b>2</b>    | <1       | <1   |
| Magnesium  | ppm        | ASTM D5185m 560  | <b>596</b>  | 593      | 539  |
| Calcium    | ppm        | ASTM D5185m 1510 | <b>1731</b> | 1699     | 1483 |
| Phosphorus | ppm        | ASTM D5185m 780  | <b>802</b>  | 824      | 737  |
| Zinc       | ppm        | ASTM D5185m 870  | <b>1052</b> | 1069     | 870  |
| Sulfur     | ppm        | ASTM D5185m 2040 | <b>3020</b> | 3161     | 2375 |

## CONTAMINANTS

| method    | limit/base | current           | history1 | history2 |   |
|-----------|------------|-------------------|----------|----------|---|
| Silicon   | ppm        | ASTM D5185m >+100 | <b>4</b> | 3        | 6 |
| Sodium    | ppm        | ASTM D5185m       | <b>8</b> | 7        | 5 |
| Potassium | ppm        | ASTM D5185m >20   | <b>0</b> | 2        | 0 |

## INFRA-RED

| method    | limit/base | current         | history1    | history2 |      |
|-----------|------------|-----------------|-------------|----------|------|
| Soot %    | %          | *ASTM D7844     | <b>0</b>    | 0        | 0    |
| Nitration | Abs/cm     | *ASTM D7624 >20 | <b>11.4</b> | 11.6     | 10.1 |
| Sulfation | Abs/.1mm   | *ASTM D7415 >30 | <b>22.8</b> | 21.7     | 19.9 |


## FLUID DEGRADATION

| method           | limit/base | current         | history1    | history2 |      |
|------------------|------------|-----------------|-------------|----------|------|
| Oxidation        | Abs/.1mm   | *ASTM D7414 >25 | <b>18.4</b> | 18.1     | 17.4 |
| Base Number (BN) | mg KOH/g   | ASTM D2896 10.2 | <b>4.6</b>  | 4.5      | 6.2  |




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

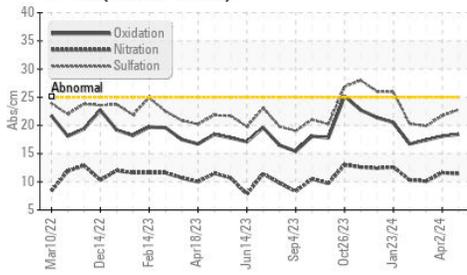

Base Number

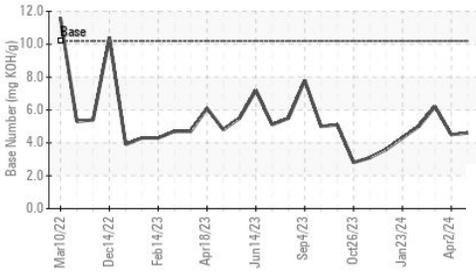

Viscosity @ 100°C

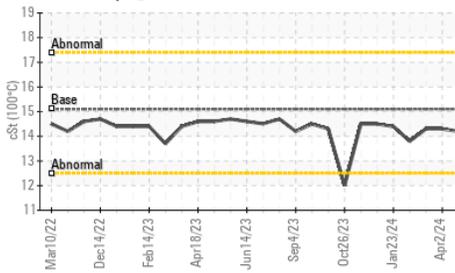


| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.1    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.1    | 14.2     | 14.3     |

## GRAPHS


Ferrous Alloys

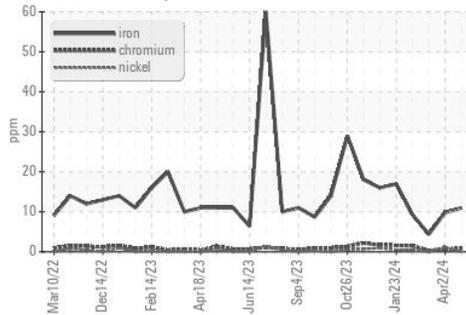


Non-ferrous Metals

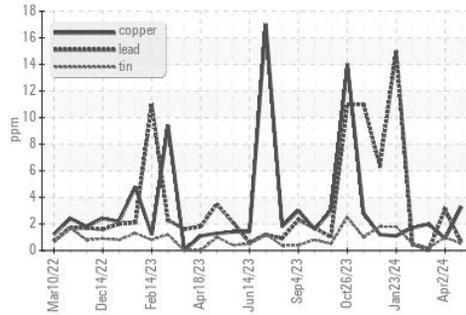

Viscosity @ 100°C

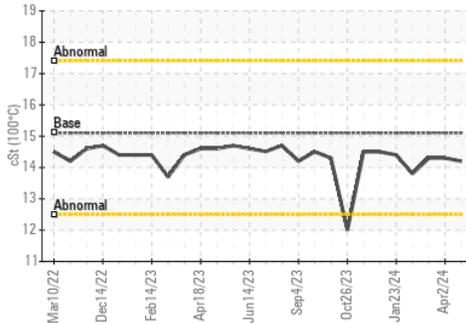

Base Number

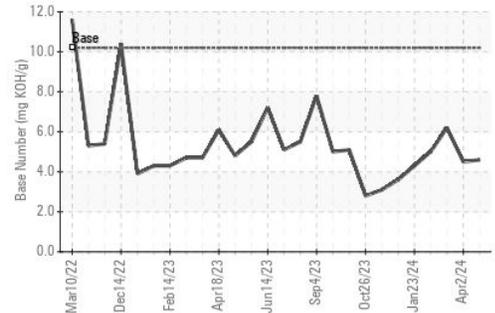

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0114068  
 Lab Number : 06155759  
 Unique Number : 10991182  
 Test Package : FLEET

GFL Environmental - 836 - Kansas City Hauling  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Loyce Stewart  
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)