


OIL ANALYSIS REPORT

Sample Rating Trend



ISO

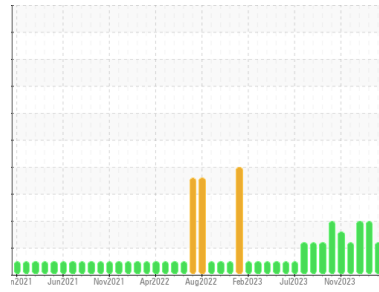

Area

MIX ROOM C [98907493]

Machine Id

KR-GR-003112 - EAST DUMPER (S/N MIX C - 11513062)

Component

Hydraulic System

Fluid

AW HYDRAULIC OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. (Customer Sample Comment: 98907493)

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0119591	PCA0116666	PCA0120391
Sample Date	Client Info	17 Apr 2024	11 Mar 2024	11 Mar 2024
Machine Age	hrs	0	0	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	Not Chngd	N/A	N/A
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	8	9	7
Chromium	ppm	10	8	8
Nickel	ppm	0	<1	<1
Titanium	ppm	<1	<1	<1
Silver	ppm	0	0	0
Aluminum	ppm	2	3	3
Lead	ppm	0	<1	<1
Copper	ppm	<1	<1	<1
Tin	ppm	0	<1	<1
Vanadium	ppm	<1	<1	<1
Cadmium	ppm	0	<1	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	0	0	0
Barium	ppm	0	<1	0
Molybdenum	ppm	0	0	0
Manganese	ppm	0	<1	0
Magnesium	ppm	0	<1	<1
Calcium	ppm	6	6	5
Phosphorus	ppm	342	384	391
Zinc	ppm	2	6	6
Sulfur	ppm	506	431	432

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	2	2	2
Sodium	ppm	2	<1	<1
Potassium	ppm	2	4	3





FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	▲ 124070	▲ 210426	▲ 174454
Particles >6µm	ASTM D7647	▲ 26835	▲ 45717	▲ 21031
Particles >14µm	ASTM D7647	86	▲ 289	▲ 436
Particles >21µm	ASTM D7647	19	▲ 47	▲ 68
Particles >38µm	ASTM D7647	1	1	3
Particles >71µm	ASTM D7647	0	0	1
Oil Cleanliness	ISO 4406 (c)	▲ 24/22/14	▲ 25/23/15	▲ 25/22/16

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	0.124	0.09	0.07


OIL ANALYSIS REPORT

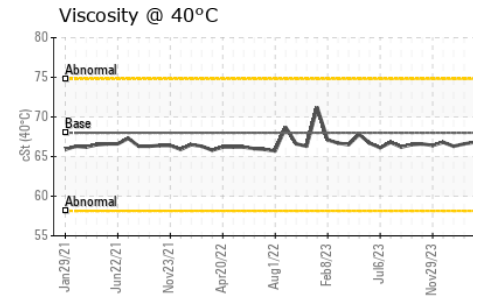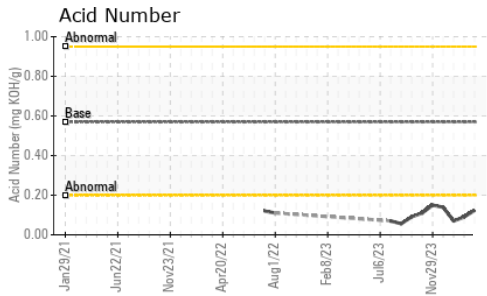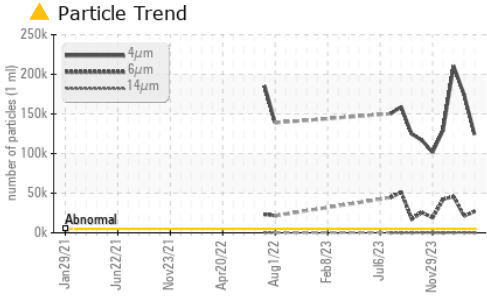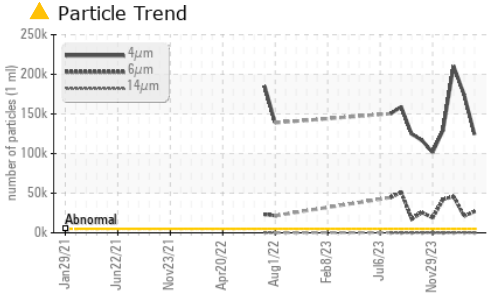






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 68	66.8	66.6	66.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

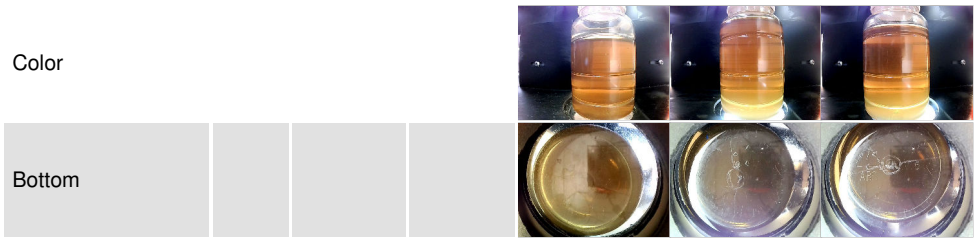

GRAPHS

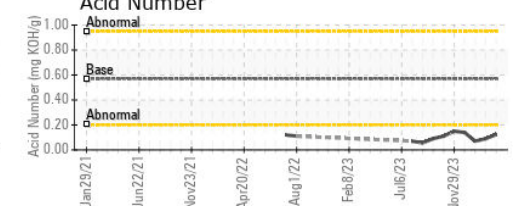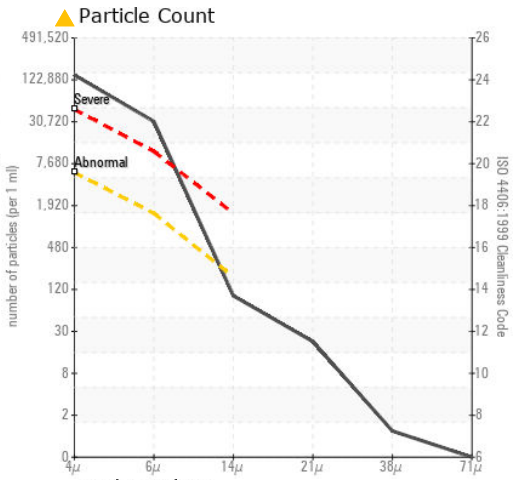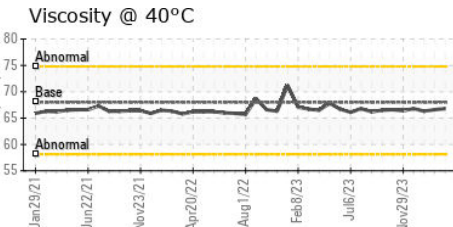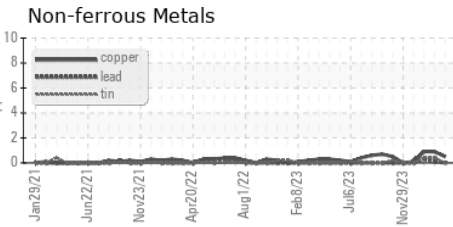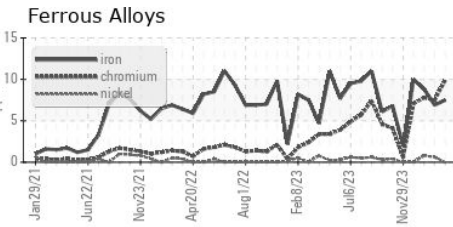

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0119591
Lab Number : 06155846
Unique Number : 10991269
Test Package : IND 2

Received : 22 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 24 Apr 2024 - Don Baldrige

KraftHeinz - Kirksville - Plant 8333 PCA
 2504 INDUSTRIAL DR
 KIRKSVILLE, MO
 US 63501
 Contact: WALLACE WARD
 wallace.ward@kraftheinzcompany.com
 T: (660)627-1031
 F: (660)627-5887

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)