


# OIL ANALYSIS REPORT

Sample Rating Trend



ISO

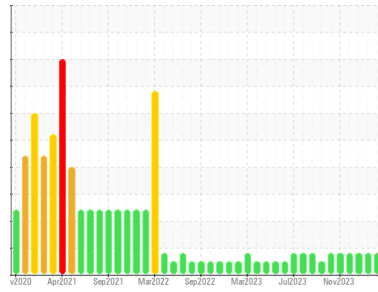

Area  
**MIX ROOM A [98858723]**  
 Machine Id  
**KR-GR-003110 - REWORK DUMPER 15A (S/N MIX A - 11513052)**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 68 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. ( Customer Sample Comment: 98858723 )

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0119592</b>	PCA0116073	PCA0114832
Sample Date	Client Info			<b>16 Apr 2024</b>	11 Mar 2024	02 Jan 2024
Machine Age	hrs	Client Info		<b>0</b>	76768	76768
Oil Age	hrs	Client Info		<b>0</b>	76768	76768
Oil Changed	Client Info			<b>Not Changed</b>	N/A	N/A
Sample Status				<b>ATTENTION</b>	ATTENTION	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	1
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	3	1
Lead	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>20	<b>1</b>	2	1
Tin	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	10
Molybdenum	ppm	ASTM D5185m	5	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	25	<b>&lt;1</b>	0	0
Calcium	ppm	ASTM D5185m	200	<b>&lt;1</b>	4	1
Phosphorus	ppm	ASTM D5185m	300	<b>335</b>	395	366
Zinc	ppm	ASTM D5185m	370	<b>&lt;1</b>	4	0
Sulfur	ppm	ASTM D5185m	2500	<b>627</b>	553	522


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>2</b>	2	1
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>19536</b>	13944	22245	
Particles >6µm	ASTM D7647	>2500	<b>1886</b>	479	1204	
Particles >14µm	ASTM D7647	>640	<b>143</b>	39	60	
Particles >21µm	ASTM D7647	>160	<b>35</b>	10	11	
Particles >38µm	ASTM D7647	>40	<b>2</b>	1	0	
Particles >71µm	ASTM D7647	>10	<b>0</b>	0	0	
Oil Cleanliness	ISO 4406 (c)	>20/18/16	<b>21/18/14</b>	21/16/12	22/17/13	


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	<b>0.25</b>	0.23	0.23

# OIL ANALYSIS REPORT


## Particle Trend

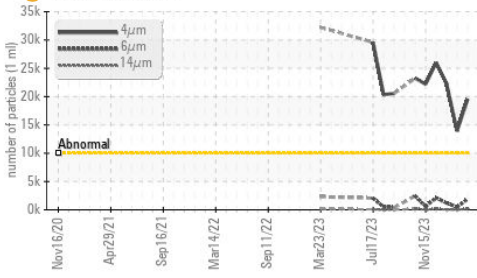


## Particle Trend

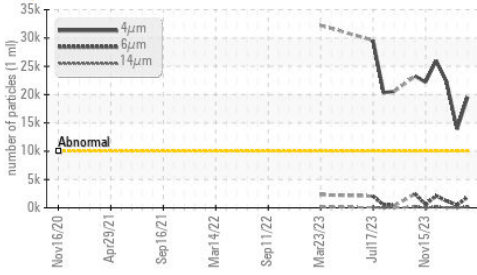

## Acid Number

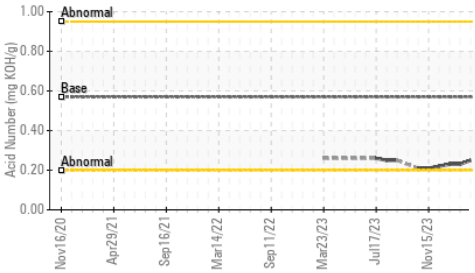

## Viscosity @ 40°C

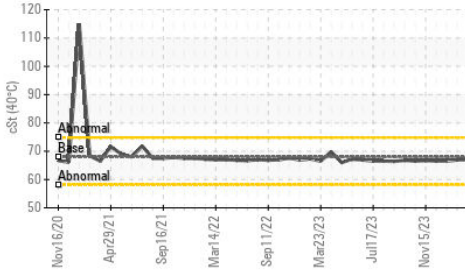


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68	67.0	66.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color

Bottom

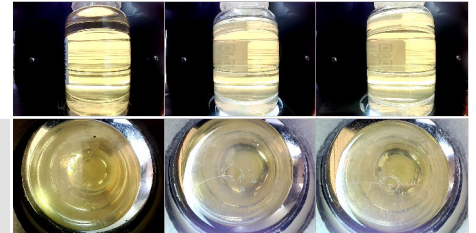


## GRAPHS


### Ferrous Alloys

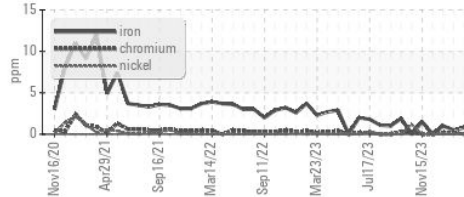


### Non-ferrous Metals

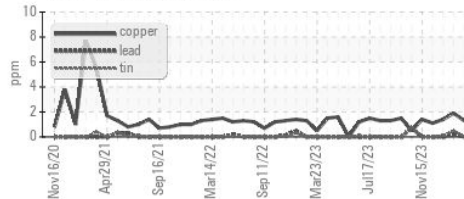


### Viscosity @ 40°C

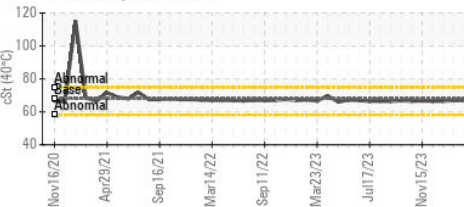

### Particle Count

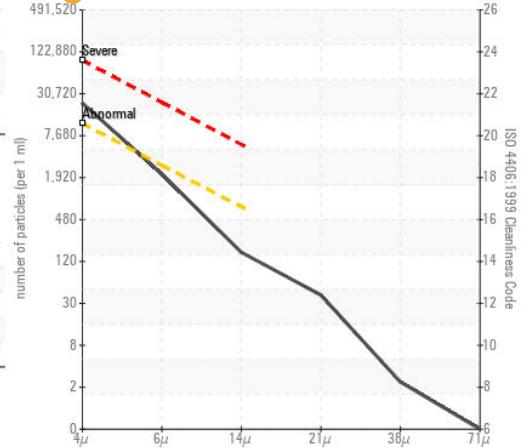

### Acid Number

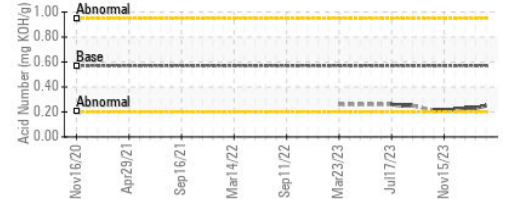

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0119592  
**Lab Number** : 06155870  
**Unique Number** : 10991293  
**Test Package** : IND 2

**Received** : 22 Apr 2024  
**Tested** : 23 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Don Baldrige

**KraftHeinz - Kirksville - Plant 8333 PCA**  
 2504 INDUSTRIAL DR  
 KIRKSVILLE, MO  
 US 63501

Contact: WALLACE WARD  
 wallace.ward@kraftheinzcompany.com

T: (660)627-1031

F: (660)627-5887

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)