


OIL ANALYSIS REPORT

Sample Rating Trend

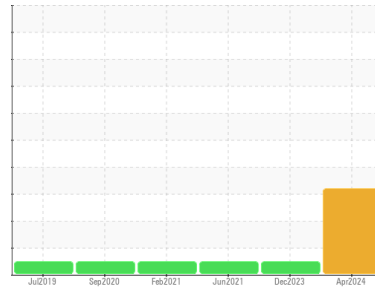

Machine Id
DT663
 Component
Front Differential
 Fluid
CHEVRON RPM SYNTHETIC GEAR 75W90 (4 mls)

DIAGNOSIS

Recommendation
 We advise that you check all areas where dirt can enter the system. Resample at the next service interval to monitor.

Wear
 Gear wear is indicated.

Contamination
 Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition
 The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0121898	PCA0104198	PCA0046168
Sample Date	Client Info			15 Apr 2024	05 Dec 2023	15 Jun 2021
Machine Age	mls	Client Info		0	240062	0
Oil Age	mls	Client Info		0	28325	0
Oil Changed	Client Info			N/A	Not Changd	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	NEG	NEG	NEG





WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	▲ 916	232	246
Chromium	ppm	ASTM D5185m	>10	4	1	2
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		1	<1	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	● 6	3	1
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>100	6	1	1
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Antimony	ppm	ASTM D5185m	>5	---	---	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		<1	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		8	171	211
Barium	ppm	ASTM D5185m		3	0	<1
Molybdenum	ppm	ASTM D5185m		1	0	<1
Manganese	ppm	ASTM D5185m		22	5	8
Magnesium	ppm	ASTM D5185m		11	0	<1
Calcium	ppm	ASTM D5185m		24	0	12
Phosphorus	ppm	ASTM D5185m		721	1339	1348
Zinc	ppm	ASTM D5185m		40	2	2
Sulfur	ppm	ASTM D5185m		21914	22200	21005

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	▲ 104	26	24
Sodium	ppm	ASTM D5185m		11	4	3
Potassium	ppm	ASTM D5185m	>20	39	6	<1

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

OIL ANALYSIS REPORT

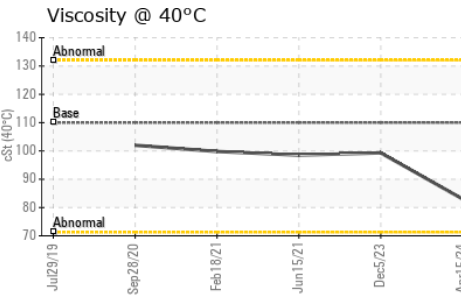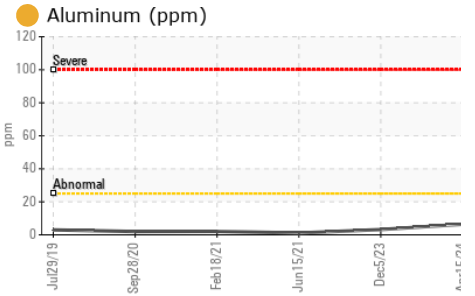
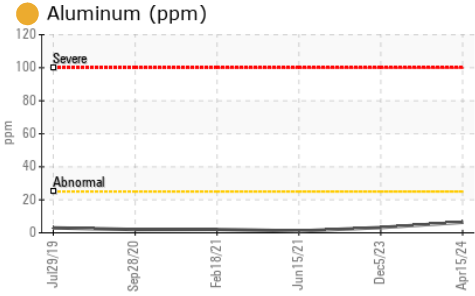
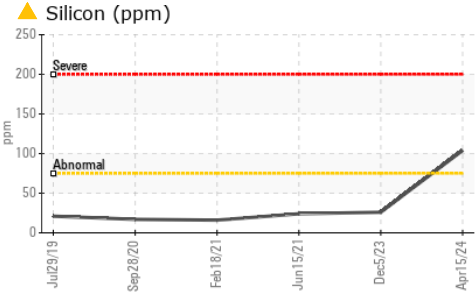


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	110	83.0	99.3	98.5

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

GRAPHS

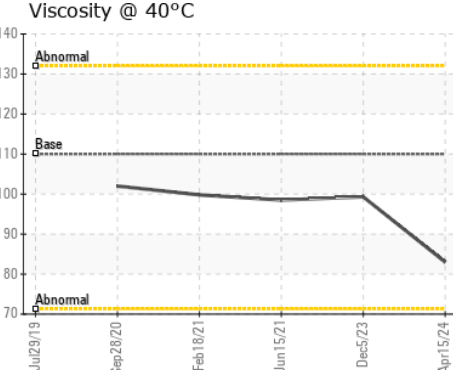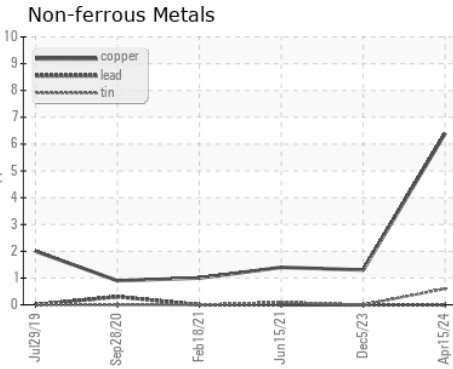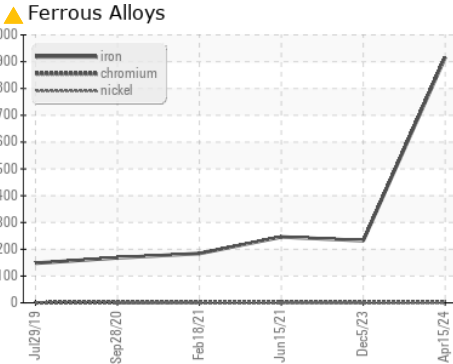

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0121898
Lab Number : **06156314**
Unique Number : 10991737
Test Package : FLEET

Received : 22 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 24 Apr 2024 - Sean Felton

NW WHITE & CO - BEAUFORT DIVISION
 1491 YENMASSEE HIGHWAY
 VARNVILLE, SC
 US 29944
 Contact: VINCENT BULLOCK
 bullockvince514@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: