


# PROBLEM SUMMARY

Sample Rating Trend






WEAR

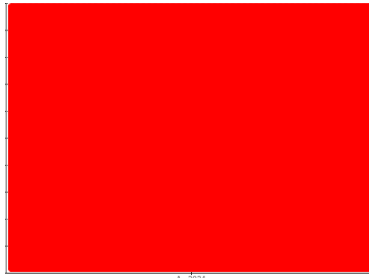

Machine Id  
**MACK 1430**  
 Component  
**Blower**  
 Fluid  
**PETRO CANADA SYNDURO SHB ISO 220 (3 QTS)**

## COMPONENT CONDITION SUMMARY

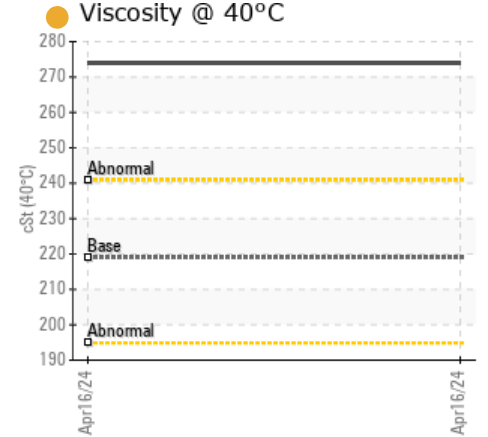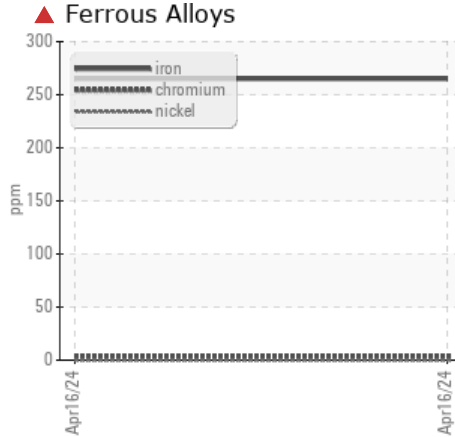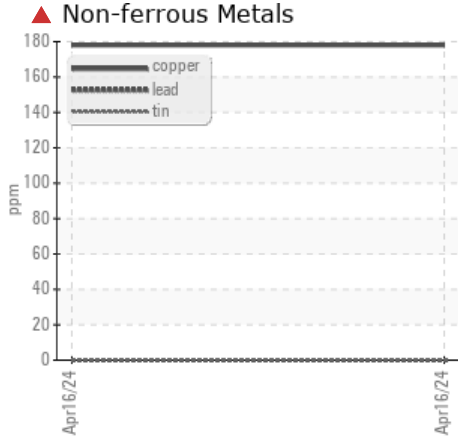

## RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Iron	ppm	ASTM D5185m	>20	▲ 265	---	---
Copper	ppm	ASTM D5185m	>20	▲ 178	---	---

Customer Id: ZFOCHI  
 Sample No.: PCA0107636  
 Lab Number: 06156318  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Sean Felton +1 919-379-4092  
[sfelton@wearcheckusa.com](mailto:sfelton@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)


## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Inspect Wear Source	---	---	?	We advise that you inspect for the source(s) of wear.
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.

## HISTORICAL DIAGNOSIS

# OIL ANALYSIS REPORT

Sample Rating Trend

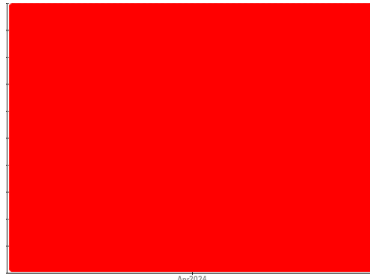

WEAR



Machine Id  
**MACK 1430**  
Component  
**Blower**  
Fluid  
**PETRO CANADA SYNDURO SHB ISO 220 (3 QTS)**

## DIAGNOSIS

### ▲ Recommendation

We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

### ▲ Wear

The copper level is severe. The iron level is severe.

### Contamination

There is no indication of any contamination in the oil.

### ● Fluid Condition

The oil viscosity is higher than normal. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0107636</b>	---	---
Sample Date	Client Info		<b>16 Apr 2024</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>48</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>SEVERE</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>▲ 265</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>3</b>	---	---
Nickel	ppm	ASTM D5185m >20	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	---	---
Lead	ppm	ASTM D5185m >20	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >20	<b>▲ 178</b>	---	---
Tin	ppm	ASTM D5185m >20	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185m 5.0	<b>6</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>4</b>	---	---
Manganese	ppm	ASTM D5185m	<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m 5.0	<b>3</b>	---	---
Calcium	ppm	ASTM D5185m 5.0	<b>22</b>	---	---
Phosphorus	ppm	ASTM D5185m 100	<b>554</b>	---	---
Zinc	ppm	ASTM D5185m 5.0	<b>82</b>	---	---
Sulfur	ppm	ASTM D5185m 1900	<b>1196</b>	---	---




## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>6</b>	---	---
Sodium	ppm	ASTM D5185m	<b>6</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	---	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	<b>NEG</b>	---	---
Free Water	scalar	*Visual	<b>NEG</b>	---	---




# OIL ANALYSIS REPORT

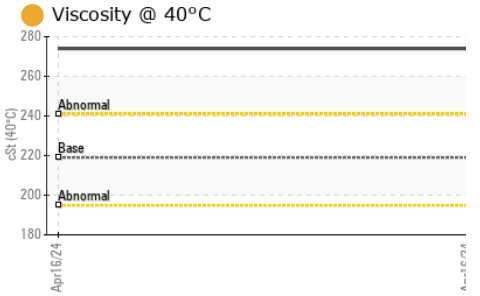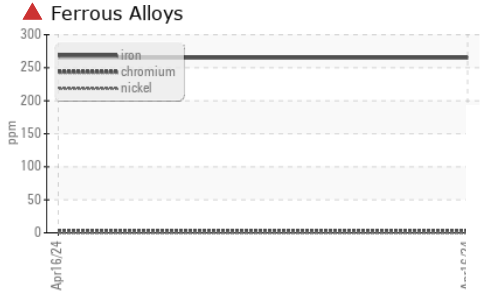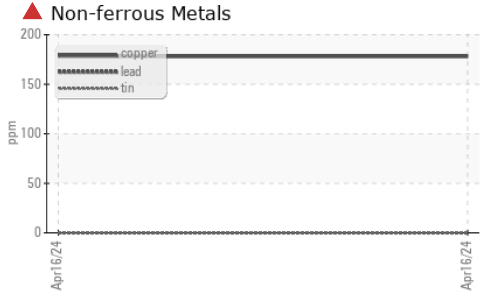

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 219	● 274	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

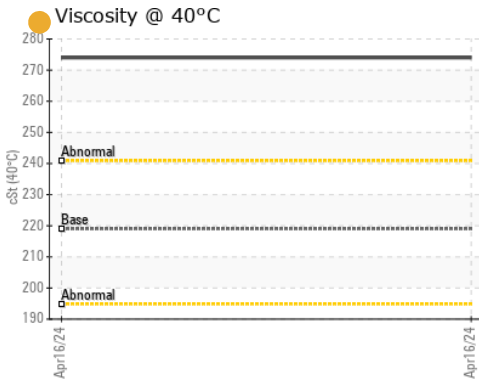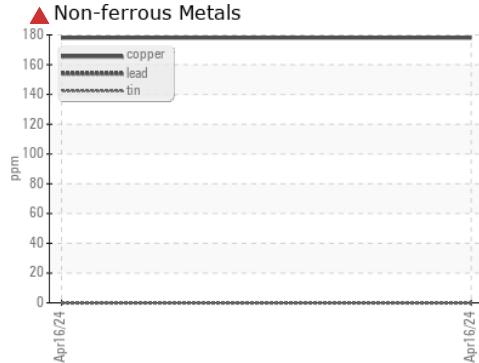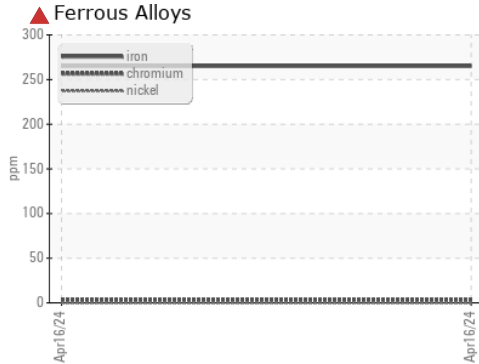

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0107636      **Received** : 22 Apr 2024  
**Lab Number** : 06156318      **Tested** : 23 Apr 2024  
**Unique Number** : 10991741      **Diagnosed** : 24 Apr 2024 - Sean Felton  
**Test Package** : FLEET

**Z FORCE TRANSPORTATION INC**  
 700 E JOE ORR RD  
 CHICAGO HEIGHTS, IL  
 US 60411  
 Contact: MIKE PROCANIN  
 mprocanin@zforcetransportation.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: