


OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY

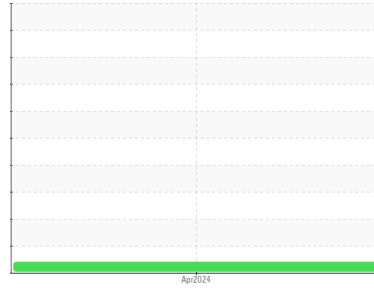

Area
[70425]
 Machine Id
MG007

Component
Transmission (Manual)

Fluid
PETRO CANADA HYDREX AW 68 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: New purchase PM-4 changed fluid and filters)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

Viscosity of sample indicates oil is within ISO 46 range, advise investigate. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0109350	---	---
Sample Date	Client Info		15 Apr 2024	---	---
Machine Age	hrs	Client Info	11667	---	---
Oil Age	hrs	Client Info	11667	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	92	---	---
Chromium	ppm	ASTM D5185m >5	<1	---	---
Nickel	ppm	ASTM D5185m >5	0	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >7	0	---	---
Aluminum	ppm	ASTM D5185m >25	3	---	---
Lead	ppm	ASTM D5185m >45	2	---	---
Copper	ppm	ASTM D5185m >225	4	---	---
Tin	ppm	ASTM D5185m >10	1	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	25	---	---
Barium	ppm	ASTM D5185m 0	0	---	---
Molybdenum	ppm	ASTM D5185m 0	3	---	---
Manganese	ppm	ASTM D5185m 0	1	---	---
Magnesium	ppm	ASTM D5185m 0	39	---	---
Calcium	ppm	ASTM D5185m 50	3220	---	---
Phosphorus	ppm	ASTM D5185m 330	1129	---	---
Zinc	ppm	ASTM D5185m 430	1247	---	---
Sulfur	ppm	ASTM D5185m 760	4630	---	---


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	6	---	---
Sodium	ppm	ASTM D5185m	6	---	---
Potassium	ppm	ASTM D5185m >20	2	---	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	NONE	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >0.1	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

OIL ANALYSIS REPORT

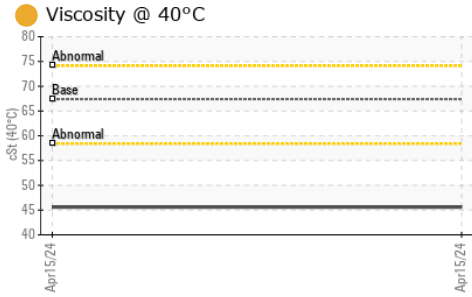









FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	67.4	45.6	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

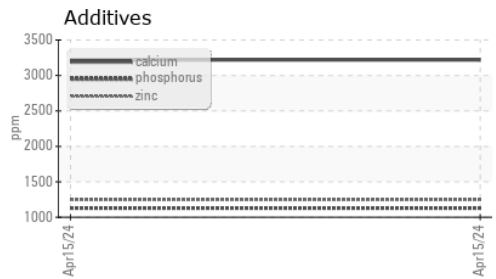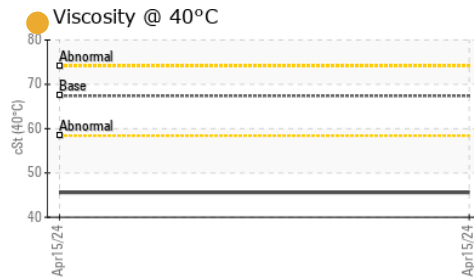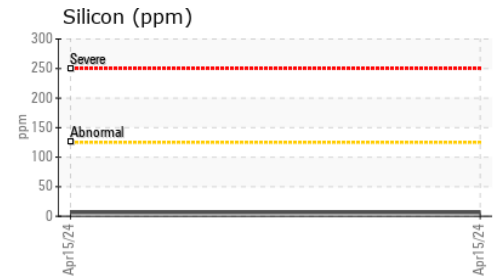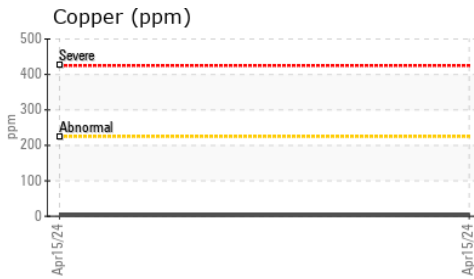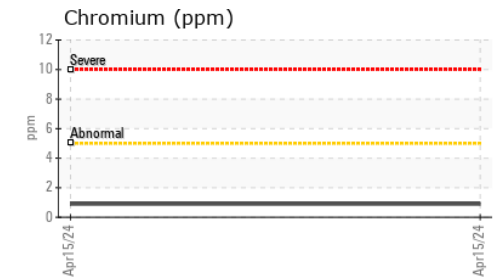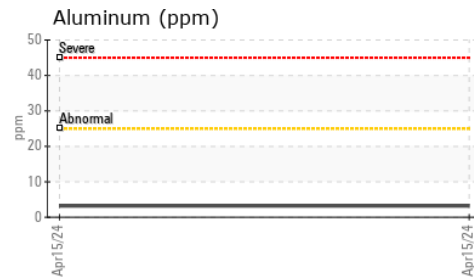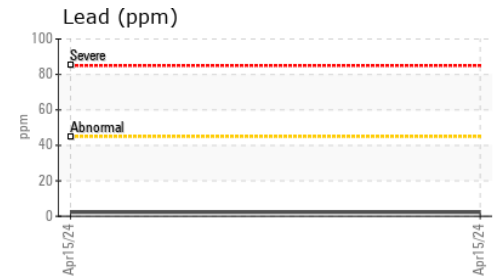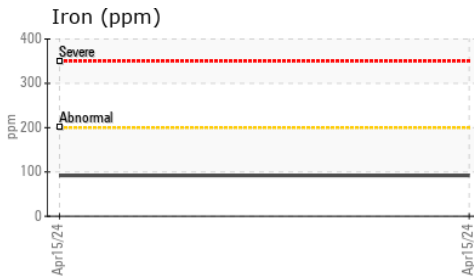

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109350
Lab Number : 06156473
Unique Number : 10991896
Test Package : MOB 1

Received : 22 Apr 2024
Tested : 26 Apr 2024
Diagnosed : 26 Apr 2024 - Jonathan Hester

Kemp Quarries - Pryor Stone - Pryor
 1050 E 520 Rd
 Pryor, OK
 US 74361
 Contact:

pryor@pryorstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: