


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

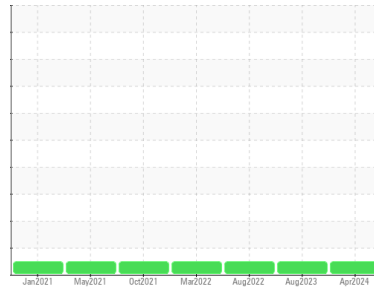

Machine Id
DT701
 Component
Transmission (Auto)
 Fluid
COGNIS EMGARD 2805 ATF (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | PCA0102246 | PCA0102250 | PCA0079618 |
| Sample Date | Client Info | | | 11 Apr 2024 | 24 Aug 2023 | 22 Aug 2022 |
| Machine Age | mls | Client Info | | 201427 | 200392 | 150779 |
| Oil Age | mls | Client Info | | 1036 | 150779 | 99979 |
| Oil Changed | Client Info | | | N/A | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.1 | NEG | NEG | NEG |


| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >160 | 64 | 49 | 70 |
| Chromium | ppm | ASTM D5185m | >5 | <1 | 0 | <1 |
| Nickel | ppm | ASTM D5185m | >5 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >5 | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >50 | 23 | 17 | 25 |
| Lead | ppm | ASTM D5185m | >50 | 21 | 15 | 46 |
| Copper | ppm | ASTM D5185m | >225 | 23 | 18 | 34 |
| Tin | ppm | ASTM D5185m | >10 | 3 | 1 | 2 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | <1 | 0 | 0 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 97 | 127 | 183 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | 1 |
| Magnesium | ppm | ASTM D5185m | | <1 | 0 | <1 |
| Calcium | ppm | ASTM D5185m | | 153 | 120 | 136 |
| Phosphorus | ppm | ASTM D5185m | | 270 | 282 | 413 |
| Zinc | ppm | ASTM D5185m | | 14 | 0 | 8 |
| Sulfur | ppm | ASTM D5185m | | 2011 | 2177 | 2200 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >20 | 4 | 4 | 6 |
| Sodium | ppm | ASTM D5185m | | 6 | 6 | 8 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 0 | 3 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | LIGHT | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |

OIL ANALYSIS REPORT



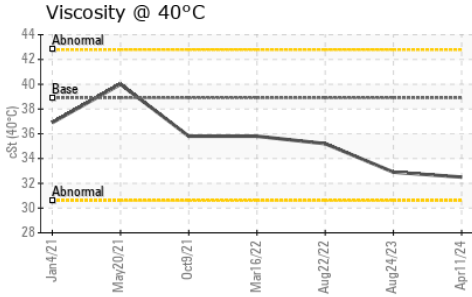


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 40°C | cSt | ASTM D445 | 38.9 | 32.5 | 32.9 | 35.2 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | | |
|--------|--|----------|----------|----------|
| Color | | no image | no image | no image |
| Bottom | | no image | no image | no image |

GRAPHS

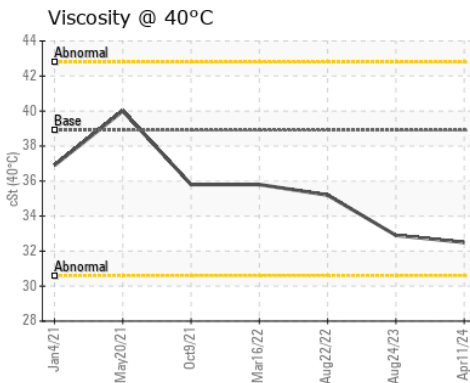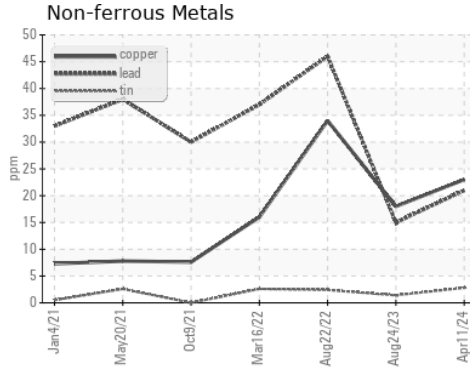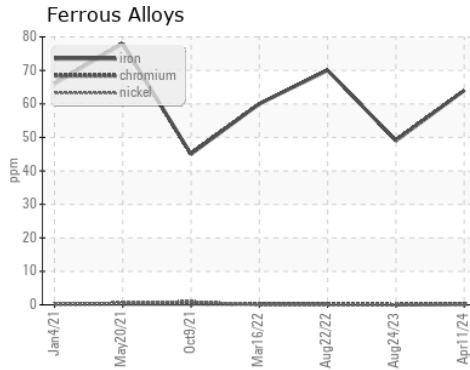

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0102246
Lab Number : 06156495
Unique Number : 10991918
Test Package : FLEET

Received : 22 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 23 Apr 2024 - Wes Davis

NW WHITE & CO - COLUMBIA DIVISION
 100 INDEPENDENCE BLVD
 COLUMBIA, SC
 US 29210
 Contact: GEORGE EDWARDS
 gedwards@nwwhite.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: