


# OIL ANALYSIS REPORT

## Sample Rating Trend



## VISCOSITY

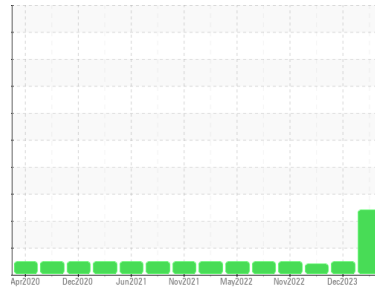

Machine Id

**T306**

Component

**Rear Differential**

Fluid

**CHEVRON DELO SYNTHETIC GEAR 75W90 (4 hrs)**

### DIAGNOSIS

#### ● Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### ● Fluid Condition

The oil viscosity is lower than normal. Additive levels indicate the addition of a different brand, or type of oil. Confirm oil type.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0116108</b>	PCA0114671	PCA0095662
Sample Date	Client Info		<b>22 Apr 2024</b>	12 Dec 2023	04 Apr 2023
Machine Age	mls	Client Info	<b>0</b>	393890	335932
Oil Age	mls	Client Info	<b>0</b>	75000	75000
Oil Changed	Client Info		<b>N/A</b>	Changed	Not Chngd
Sample Status			<b>ATTENTION</b>	NORMAL	ABNORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>31</b>	36	16
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>9</b>	<1	1
Lead	ppm	ASTM D5185m >25	<b>4</b>	0	0
Copper	ppm	ASTM D5185m >100	<b>23</b>	<1	0
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	● <b>94</b>	208	218
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	10	10
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	● <b>2</b>	108	107
Calcium	ppm	ASTM D5185m	<b>141</b>	206	214
Phosphorus	ppm	ASTM D5185m	● <b>265</b>	1324	1189
Zinc	ppm	ASTM D5185m	● <b>18</b>	187	171
Sulfur	ppm	ASTM D5185m	● <b>2540</b>	20415	21212



### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>3</b>	6	3
Sodium	ppm	ASTM D5185m	<b>3</b>	1	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	0

### VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	▲ MODER
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT


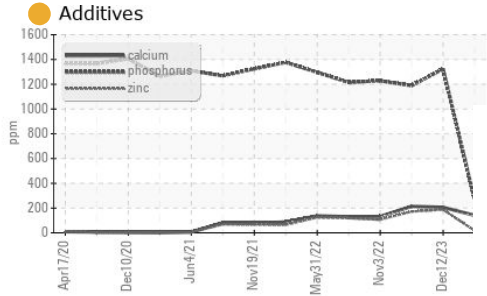
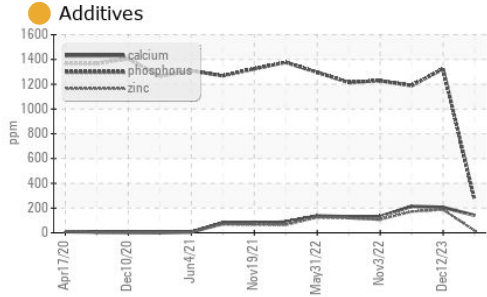


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32.5	84.2	87.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

## GRAPHS

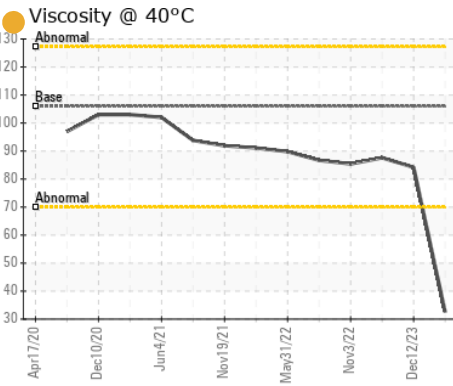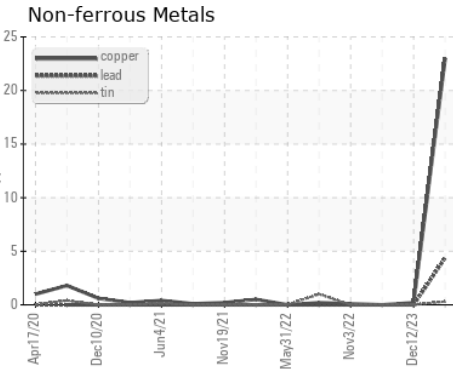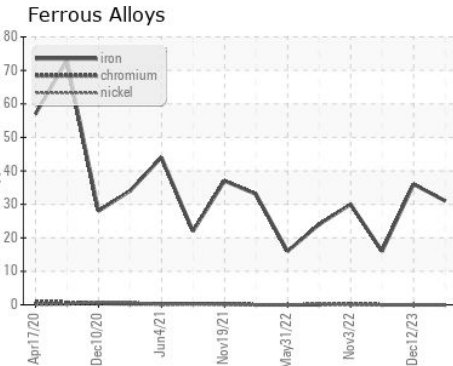

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0116108  
**Lab Number** : 06156498  
**Unique Number** : 10991921  
**Test Package** : FLEET

**NW WHITE & CO - SPECIAL SERVICE DIVISION**  
 100 INDEPENDENCE BLVD  
 COLUMBIA, SC  
 US 29210  
 Contact: George Edwards  
 gedwards@nwwhite.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)